XIAO ESP32-S3 mounting reference from Seeed PCB geometry (RB-02A)

PRINT AT 100 % / 'Actual size' (no fit-to-page). Check P2 and P3 before using the drawing.

Source: XIAO ESP32S3_V1.5.kicad_pcb d20724aa7198a897

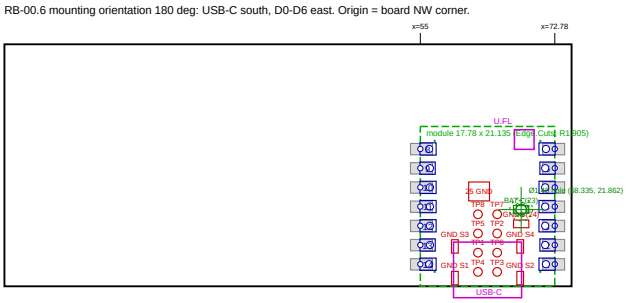

P4: board outline 75.0 x 32.0 mm (+/- 0.3 mm)

grey: RB-00.6 host pads 1.50 x 2.90 (toe 1.30 / inner 1.60)

blue: module top copper + Ø0.95 header holes (CAD)

green: module outline, BAT+ pad, Ø1.40 post hole

red: module underside exposed copper (GND0, pads 15-22, 25, USB shell S1-S4)

magenta: USB-C receptacle (9.0 mm, overhang 1.51) / U.FL 2.6 x 2.6

Scale is only valid if P2/P3 measure correctly. Dimensions are nominal CAD, not manufacturer-guaranteed tolerances.

P3: 50 x 50 mm (+/- 0.3 mm)



P2: ruler 0-150 mm (measure: 150.0 +/- 0.5 mm)