Assignment -4

Assignment Date	25 October 2022
Student Name	CHERIS IMMANUEL F
Student Roll Number	95071914021

Question-1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cm send “alert” to ibm cloud and display in device recent events.

Code :

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "hycgw4"
#define DEVICE_TYPE "Distance"
#define DEVICE_ID "Ultrasonic"
#define TOKEN "WD6Mb(-d2F+X0xWqnB"
#define speed 0.034 #define led 14 char server[] = ORG
".messaging.internetofthings.ibmcloud.com"; char publishTopic[] = "iot-
2/evt/event2/fmt/json"; char topic[] = "iot-2/cmd/home/fmt/String"; char
authMethod[] = "use-token-auth"; char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);


const int trigpin=5; const int
echopin=18;
String command; String
data="";
 long duration;
float dist;


void setup()
{
  Serial.begin(115200);   pinMode(led,
OUTPUT);   pinMode(trigpin, OUTPUT);
pinMode(echopin, INPUT);   wifiConnect();
mqttConnect();
} void loop() { bool isNearby = dist <
100; digitalWrite(led, isNearby);
   publishData();
delay(500);
```

```
  if (!client.loop()) {
mqttConnect();
  }
}
void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi"); WiFi.begin("Wokwi-
GUEST", "", 6); while (WiFi.status() != WL_CONNECTED) {
delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: ");
Serial.println(WiFi.localIP());
}  void mqttConnect() {   if
(!client.connected()) {
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);     while
(!client.connect(clientId, authMethod, token)) {      Serial.print(".");       delay(500);
    }
    initManagedDevice();
    Serial.println();
  }
}  void initManagedDevice() {   if
(client.subscribe(topic)) {
    // Serial.println(client.subscribe(topic));
    Serial.println("IBM subscribe to cmd OK");      } else {
    Serial.println("subscribe to cmd FAILED");
  } } void publishData()
{
digitalWrite(trigpin,LO
W);
digitalWrite(trigpin,HIG
H);
delayMicroseconds(10);
digitalWrite(trigpin,LO
W);
duration=pulseIn(echopi
n,HIGH);
dist=duration*speed/2;
if(dist<100){
   String payload = "{\"Alert!! Alert!! Distance\":"; payload += dist;
payload += "}";


    Serial.print("\n");
    Serial.print("Sending payload: "); Serial.println(payload); if
    (client.publish(publishTopic, (char*) payload.c_str())) {
      Serial.println("Publish OK");
    }
       }
    if(dist>100){
    String payload = "{\"Distance\":";     payload +=
dist;     payload += "}";
```

```
  Serial.print("\n");
  Serial.print("Sending payload: "); Serial.println(payload);
   if(client.publish(publishTopic, (char*) payload.c_str())) {
   Serial.println("Publish OK");

  }else {
    Serial.println("Publish FAILED");
  }

 }


 }
```

Connections:

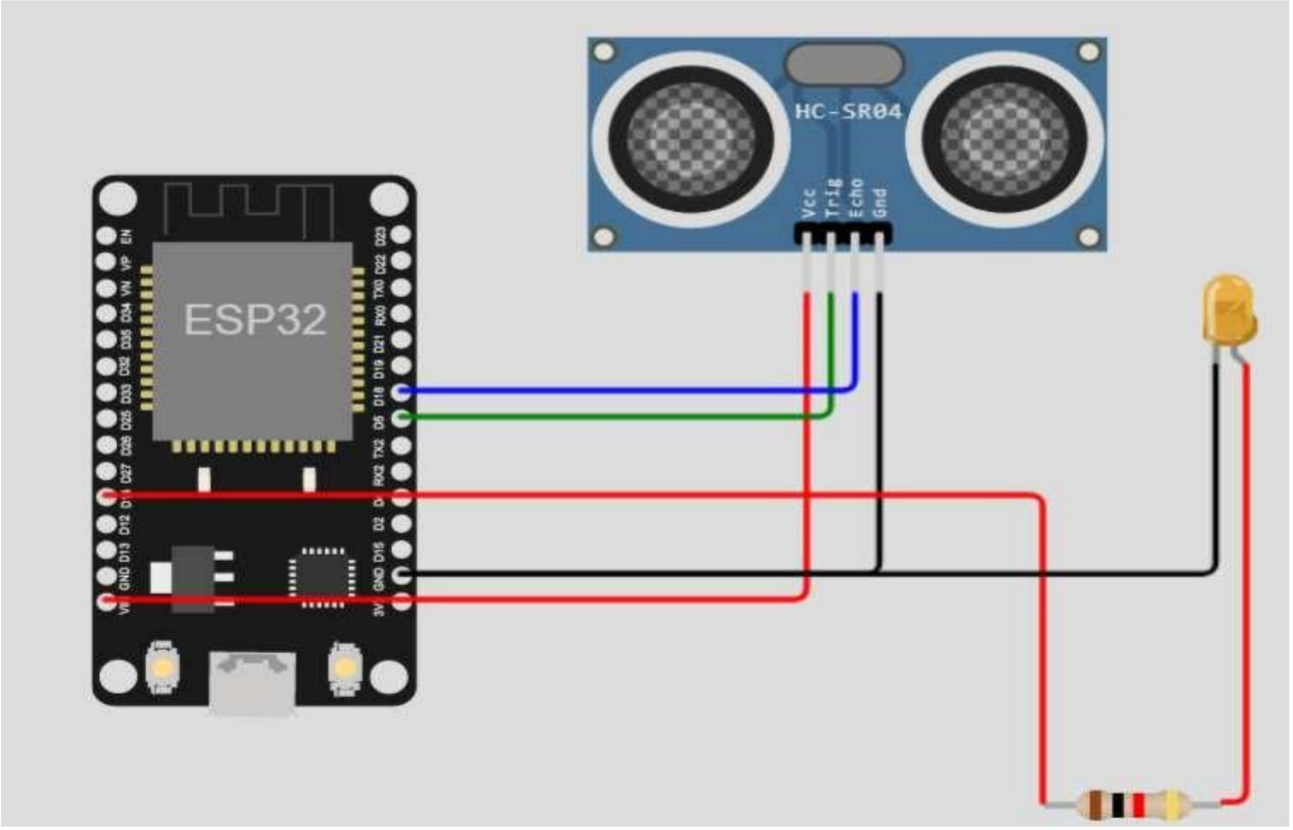

WOKWI AND IBM CLOUD CONNECTED:

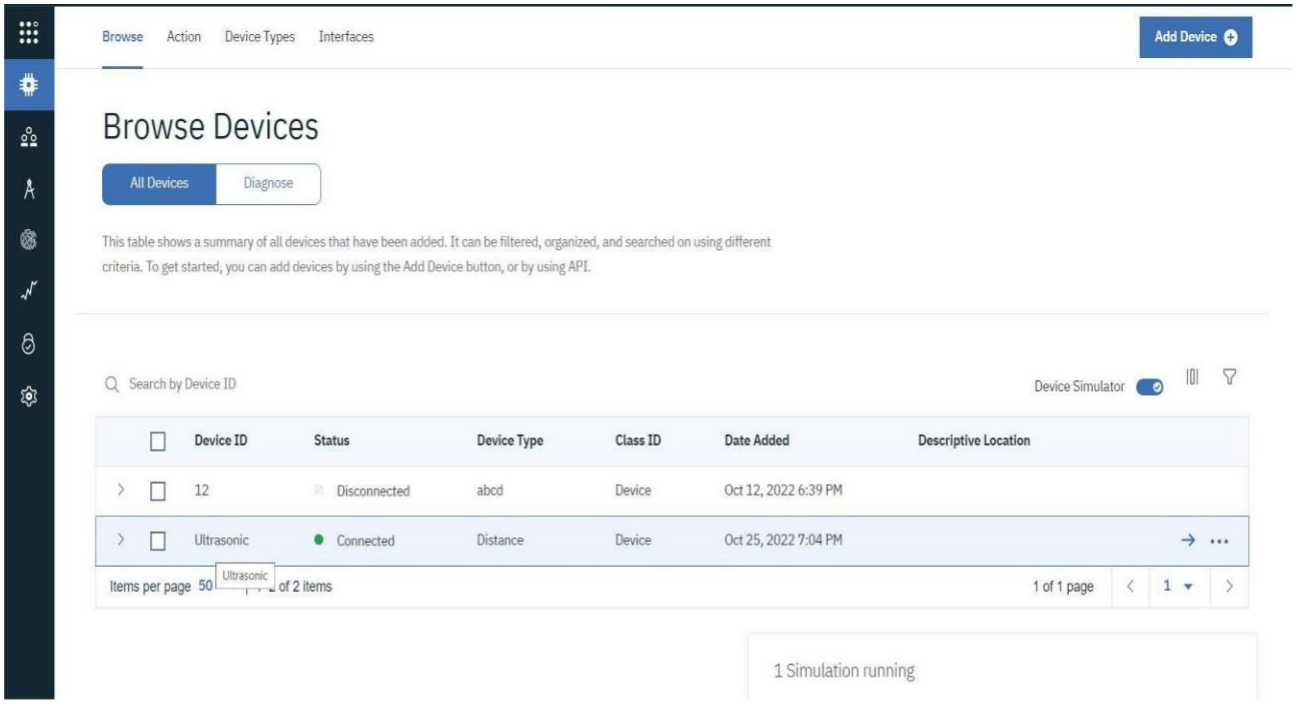

OUTPUT:

1. Distance = 95 cm Status
   = Alert Message

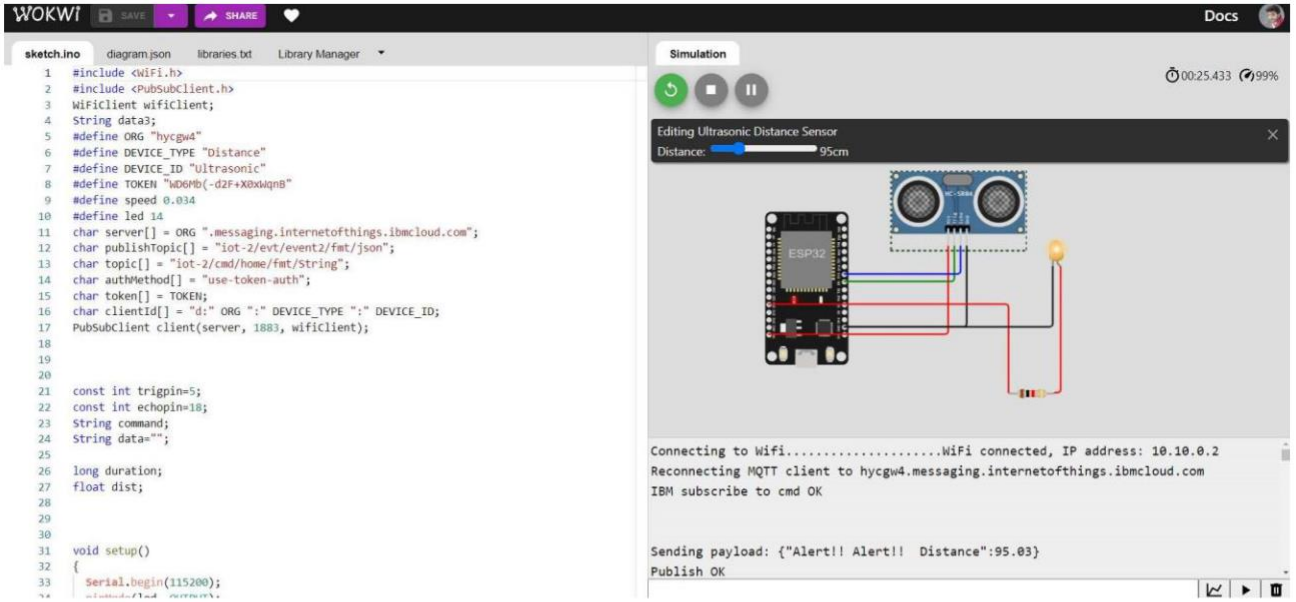

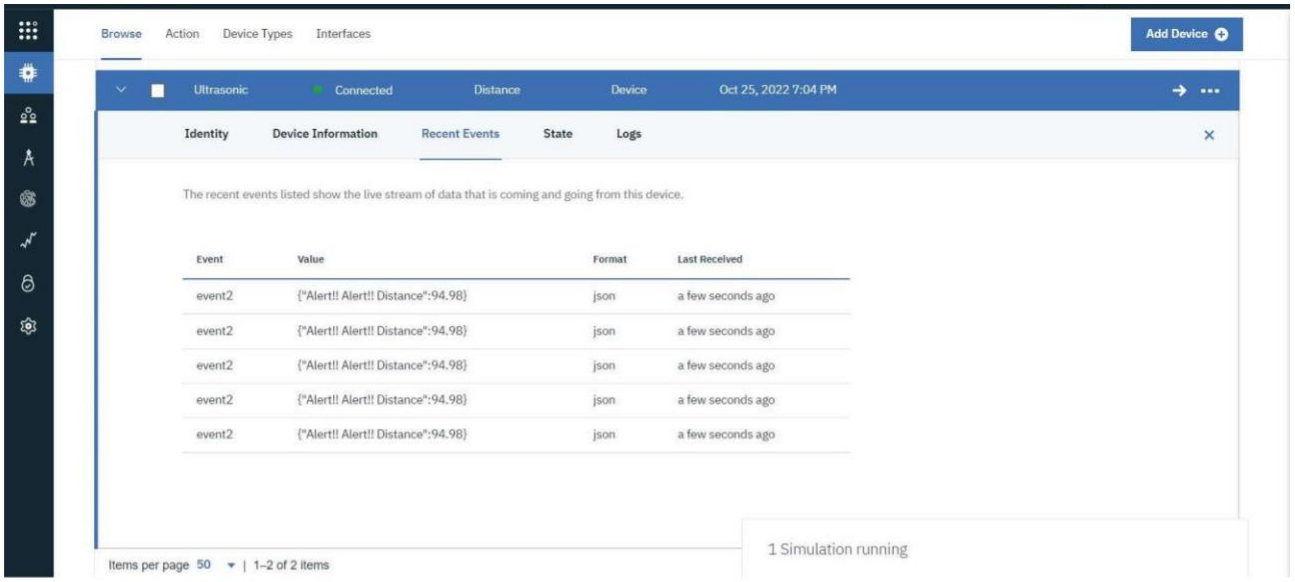

Wokwi data publishing to ibm cloud

2. Distance = 162 cm
   Status = Normal

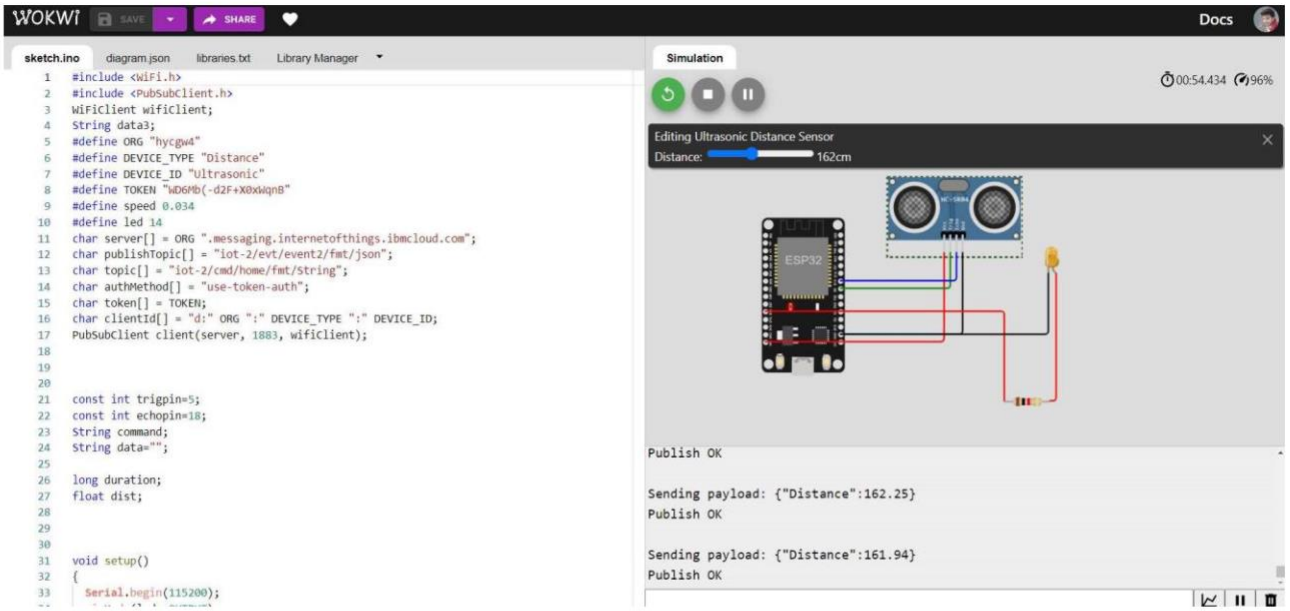

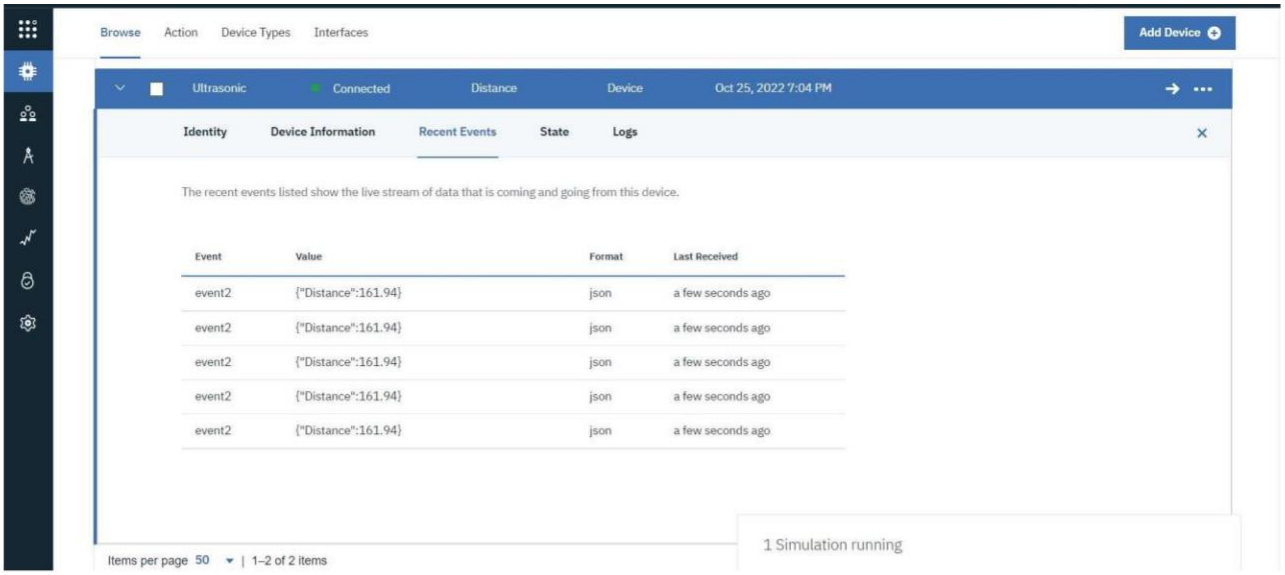

3. Distance = 27 cm
   Status = Alert Message

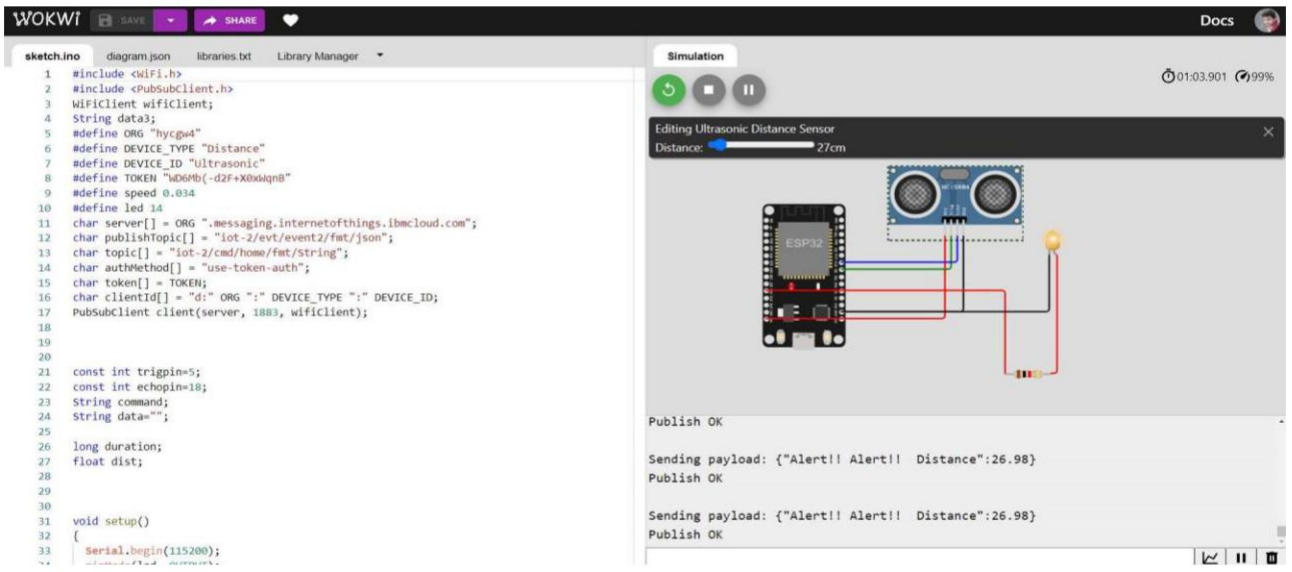

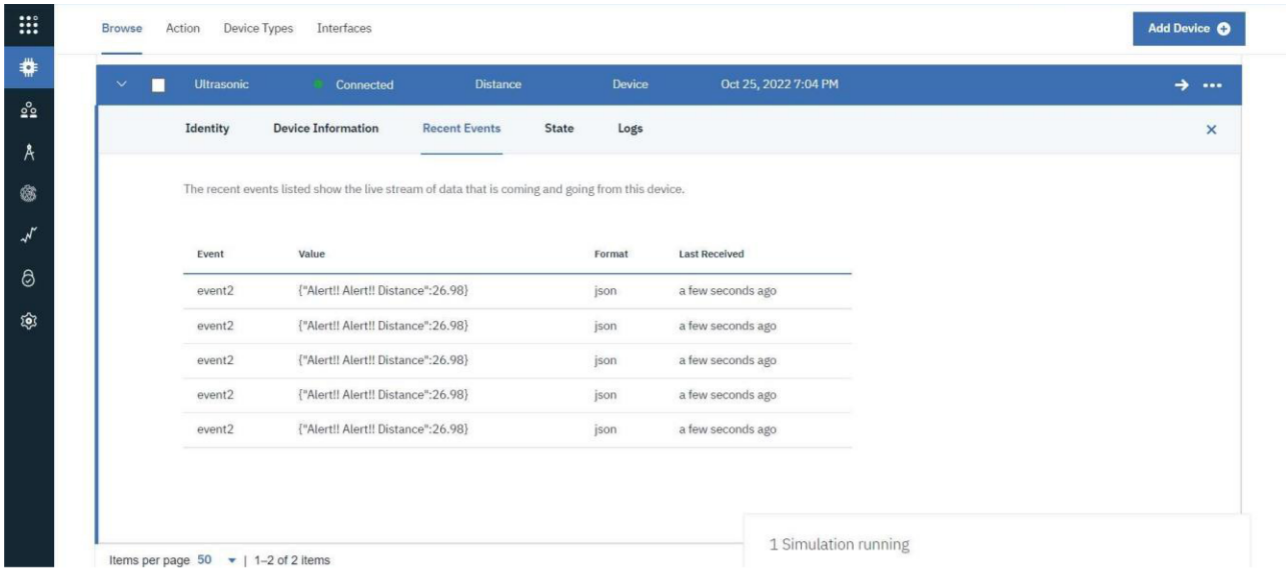

Reference link = https://wokwi.com/projects/346498745135792724