


1.) Click “options” on the toolbar, then click “Internet”:

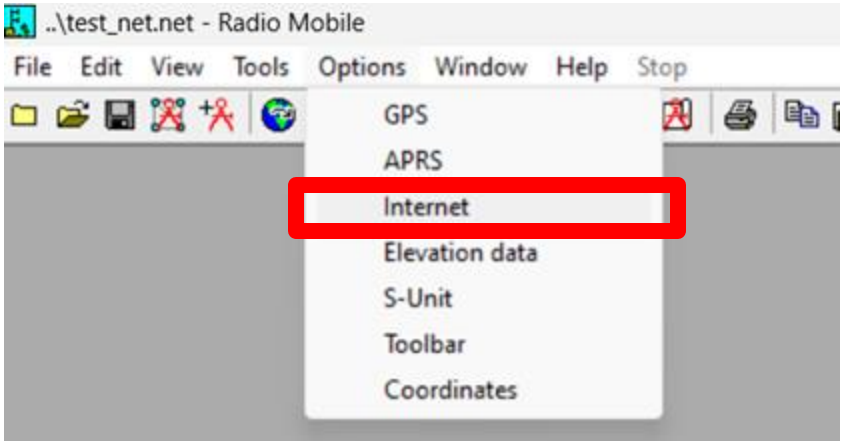


2.) Go to “SRTM” and tick “Download from Internet if a file is not found on local path and keep a local copy”:

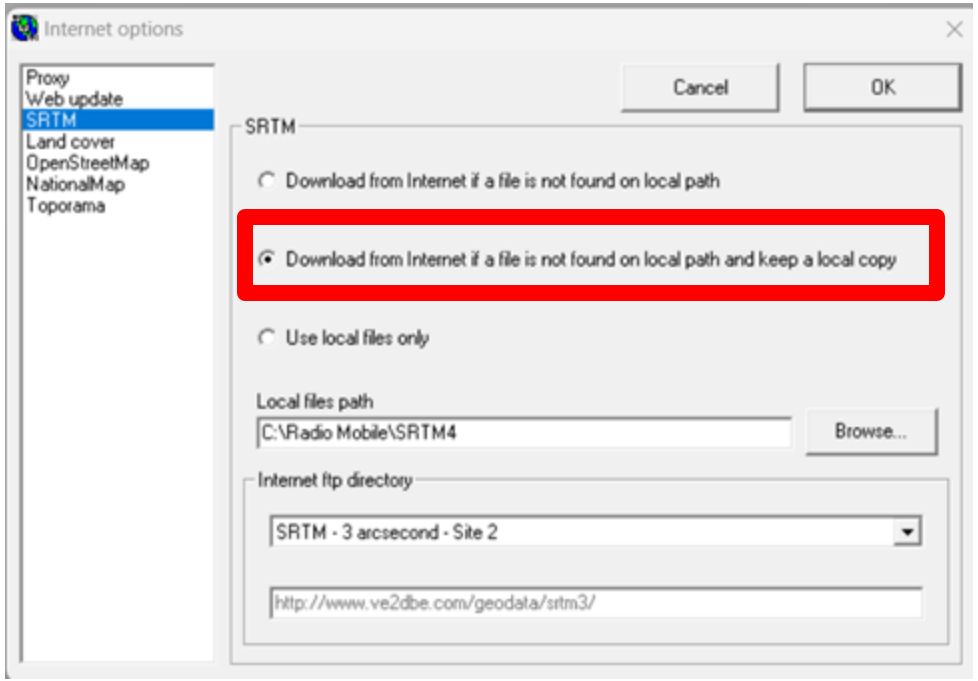


3.) Click “File” on the toolbar, then click “Map properties”:

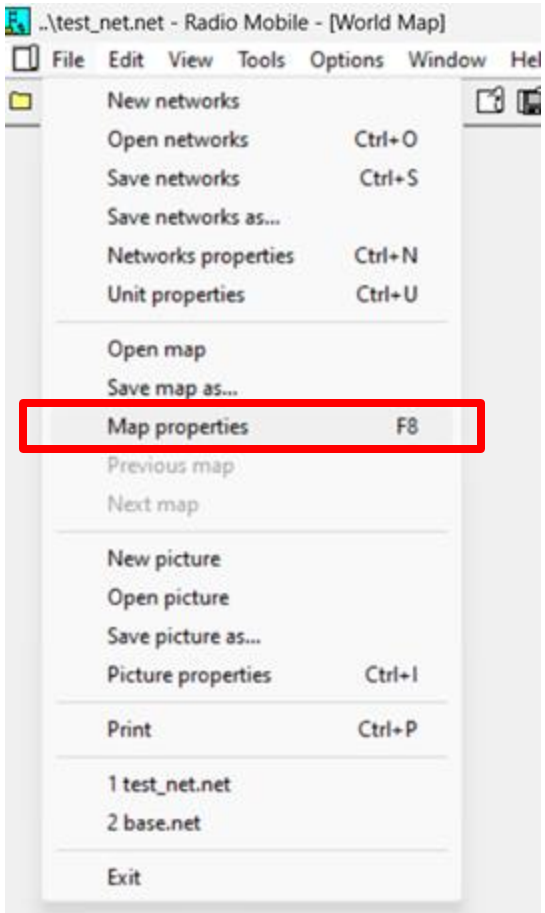


4.) Choose your study area either by entering the coordinates (Latitude, Longitude); or selecting a city name. Adjust the “Height (km)” under “Size (km)” to set the zoom of map view over your area. Click “Extract” when you’re done choosing your target area:

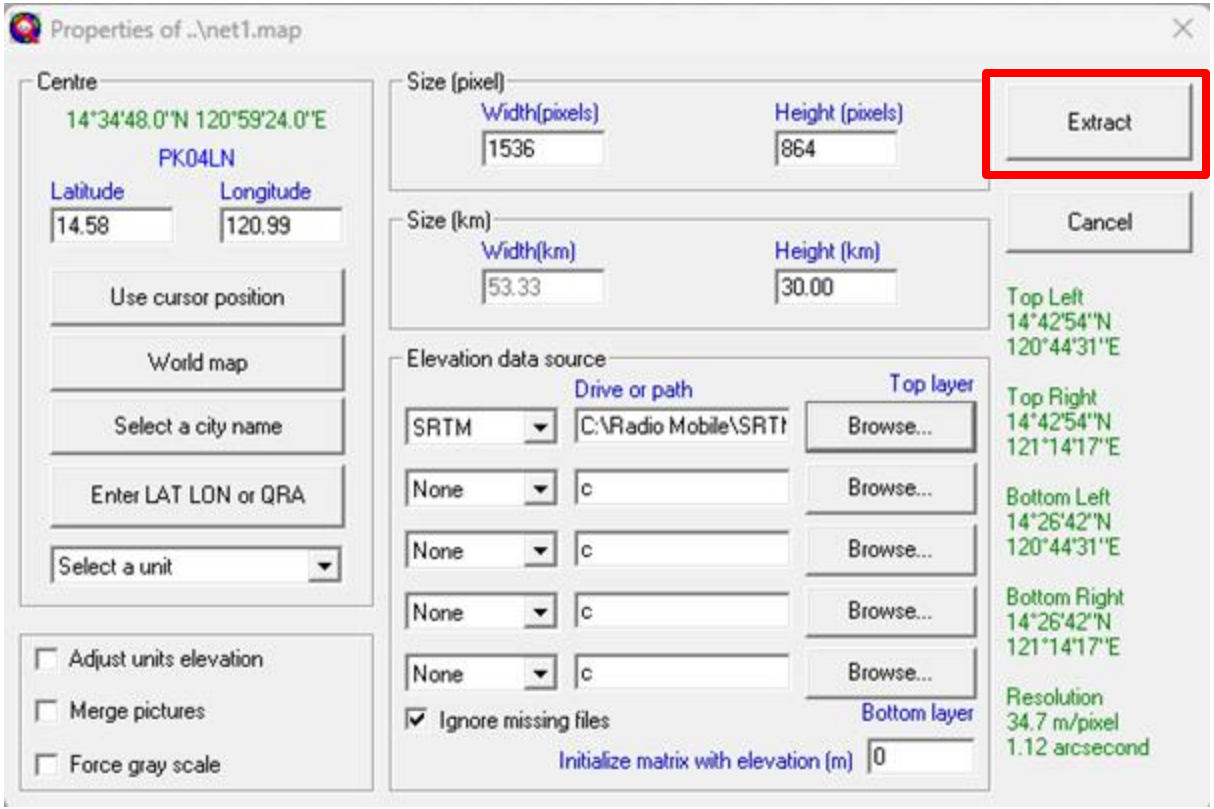


1.) Left click at any portion of the map where you want to place one unit of the network:

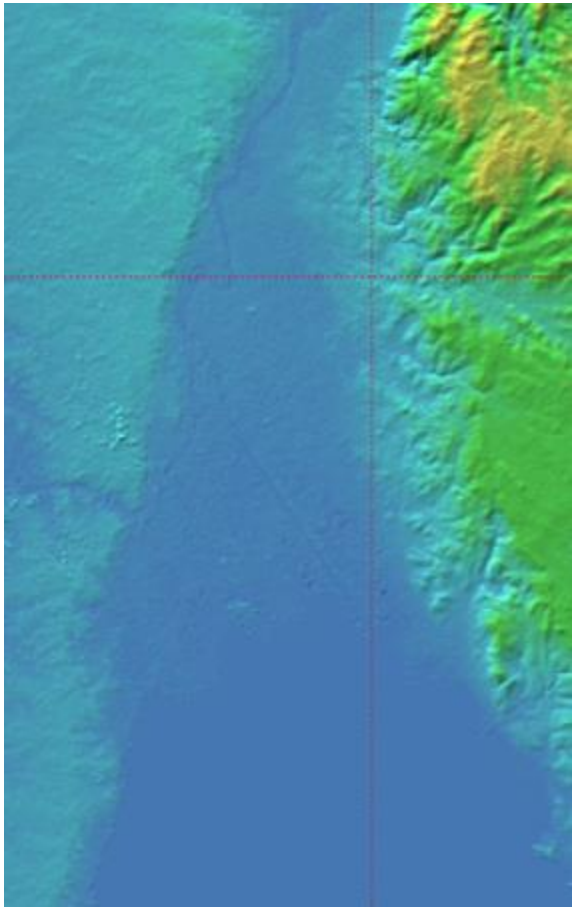


2.) Click on the "network properties" icon on the toolbar:

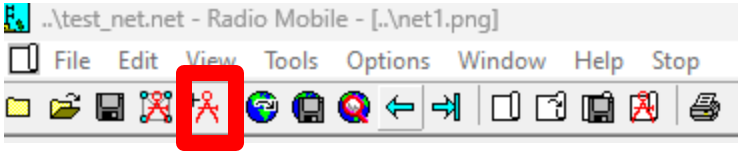


3.) Assign a unit number/name and click "Place unit at cursor position":

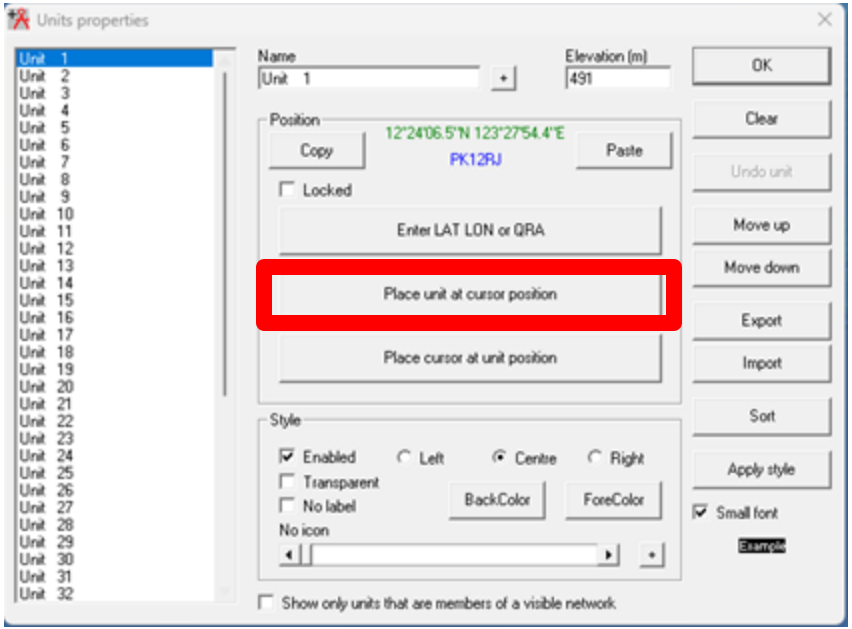

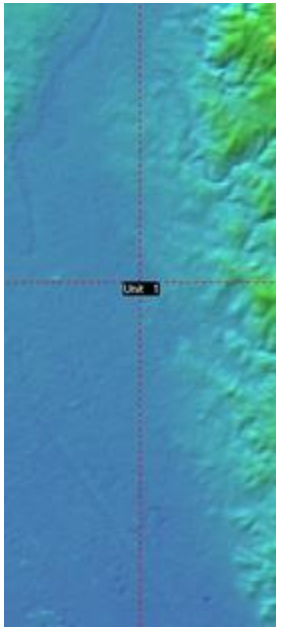


4.) Place more units on the map (you may try entering the exact coordinates using “Enter LAT LON or QRA”) (Assign a new name/number for each new unit):

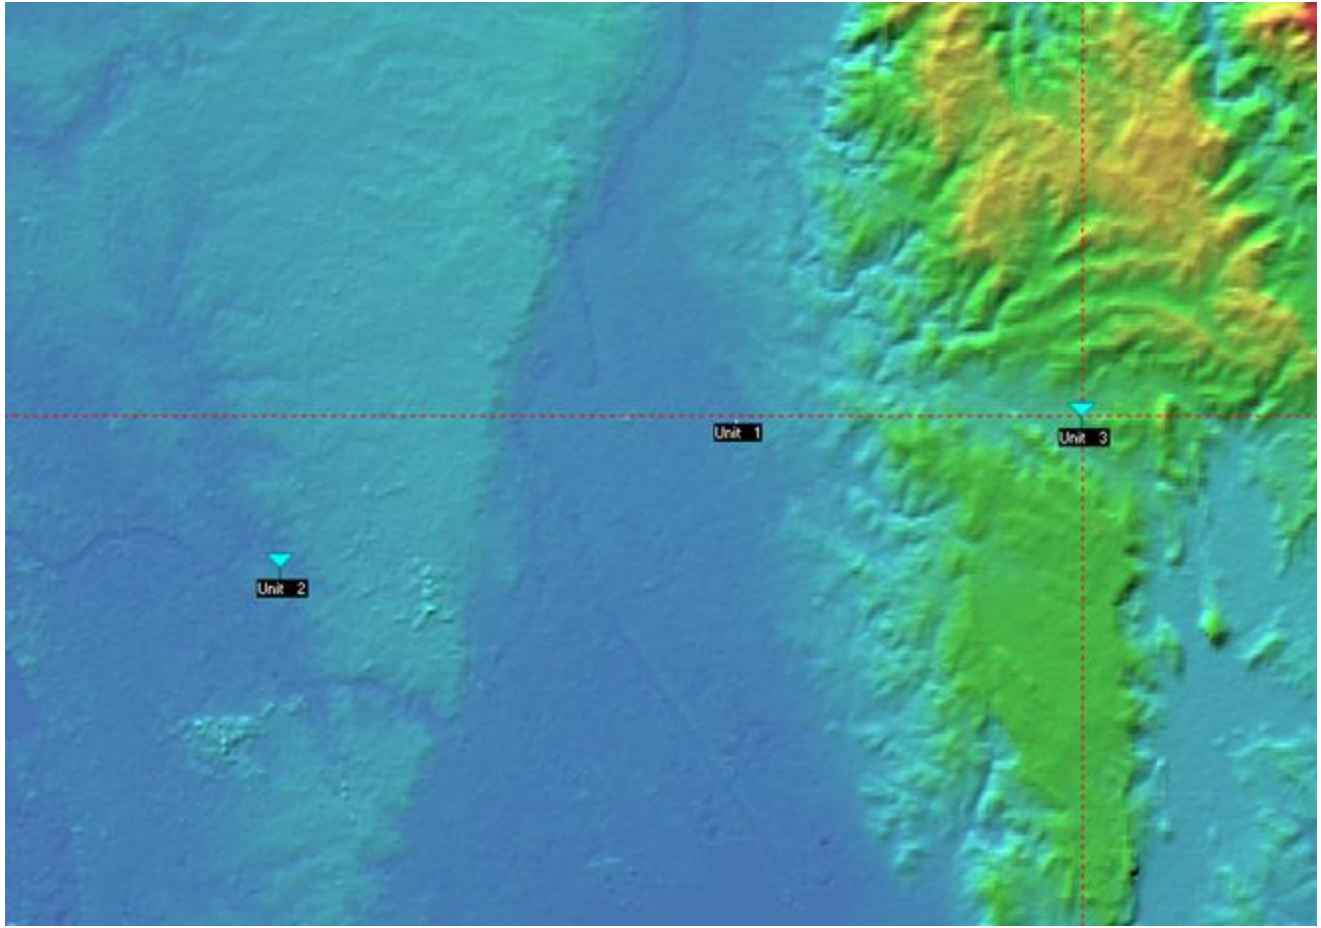


5.) To assign the units to a network and modify their parameters, click on the "network properties" icon on the toolbar:




6.) Click on the "Membership" tab and assign each unit to Net 1 by checking their tickbox (You may also modify the roles of each unit within the system):

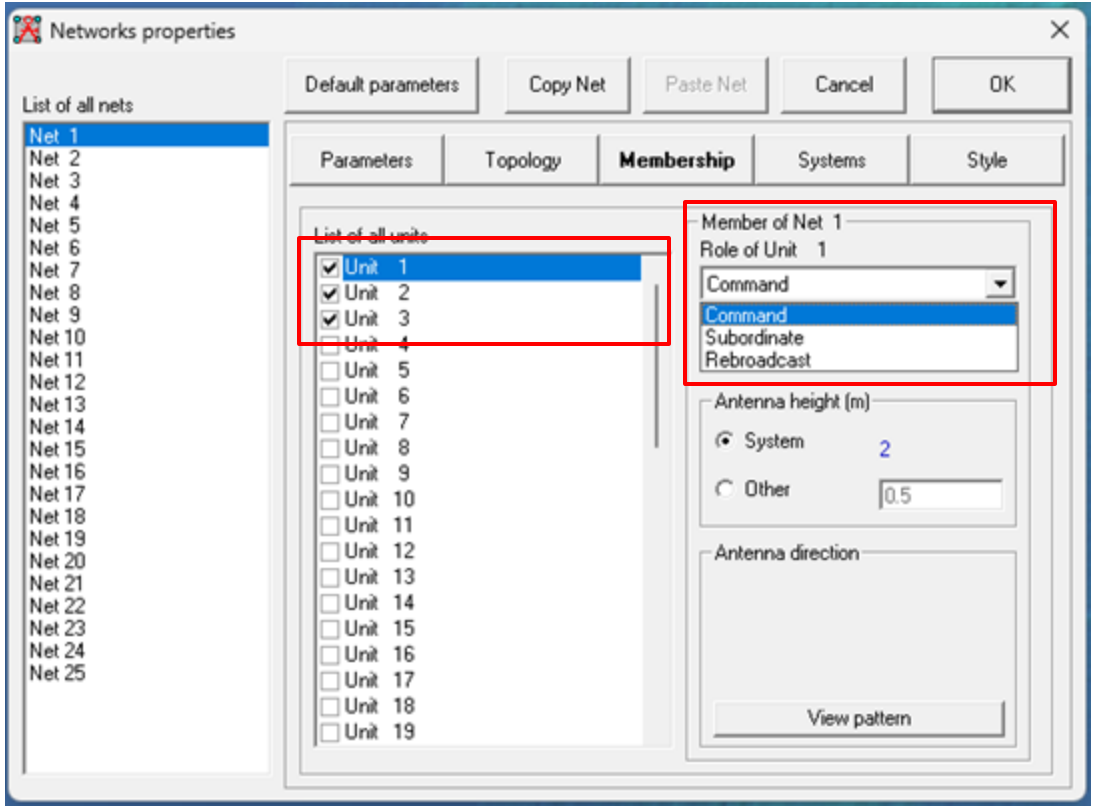


7.) You can modify the network parameters and systems parameters under the “Parameters” and “Systems” tab:

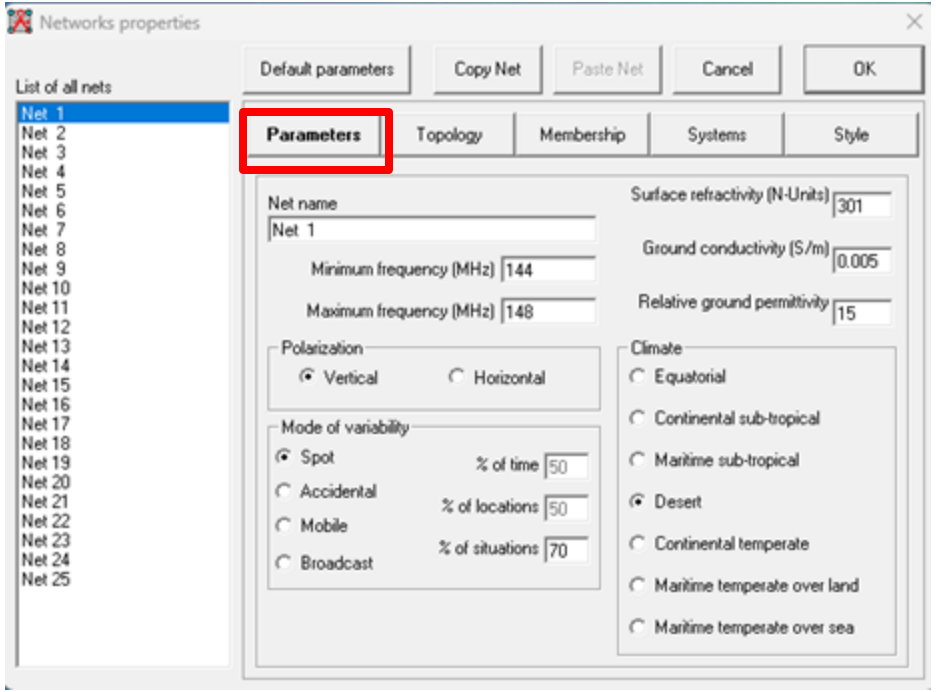

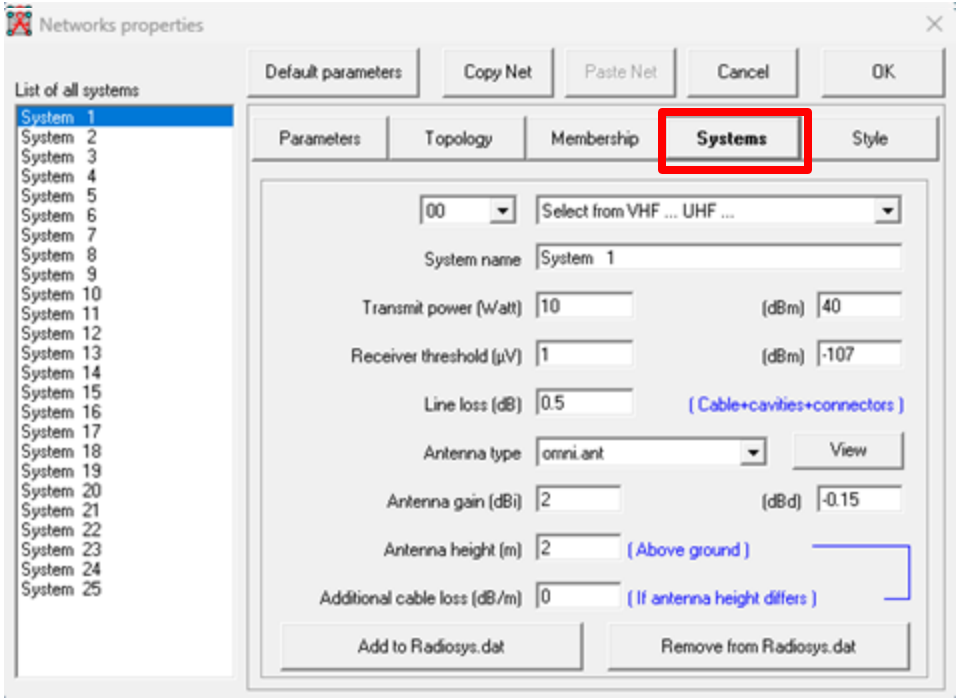


1.) Plot two units (preferably with varying terrain in between) (you may also reuse the units from previous exercises):

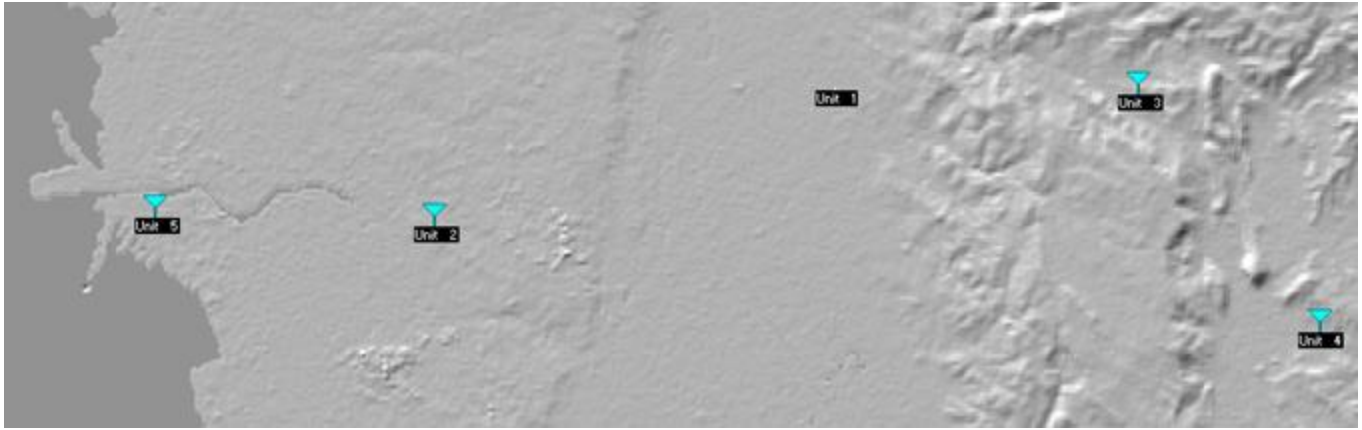


2.) Click the "Radio Link" icon on the toolbar:




3.) Assign the two units as the transmitter and receiver:

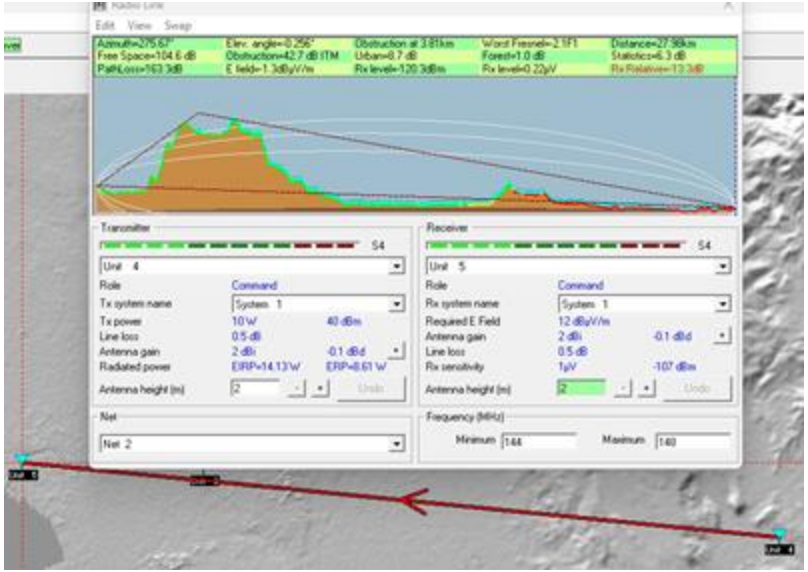

4.) To export the profile, go to “Edit” on the toolbar and click “Export to…”:

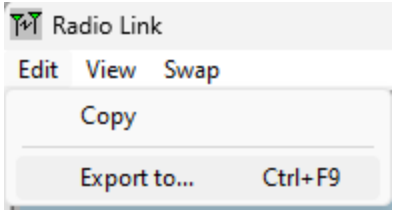

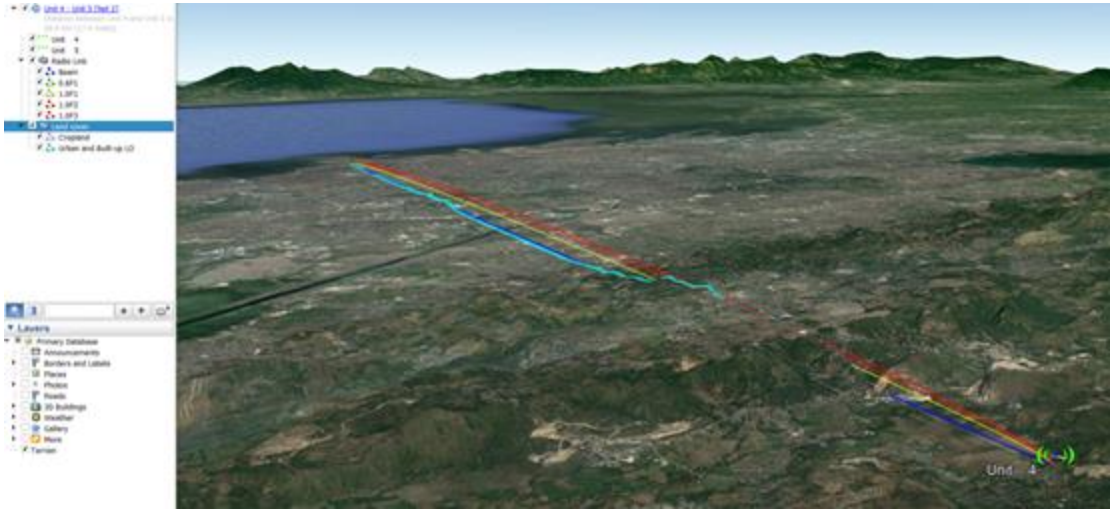

5.) Keep the default values and click “OK” :



