audio.dev CONFERENCE BRISTOL & ONLINE 2026

Workshop:

DSP In Practice

Jan Wilczek & Linus Corneliusson

thinkcell

WolfSound



- C++ Speaker at thinkcell
- TheWolfSound.com
- youtube.com/@WolfSoundAudio
- WolfTalk podcast host
- Official JUCE online course creator


Jan Wilczek
[Yan Vil-check]

Access 250+ best-practice templates

Use AI-powered tools inside PowerPoint and Excel

Automate charts with Excel-linking

Create management-level charts and presentations

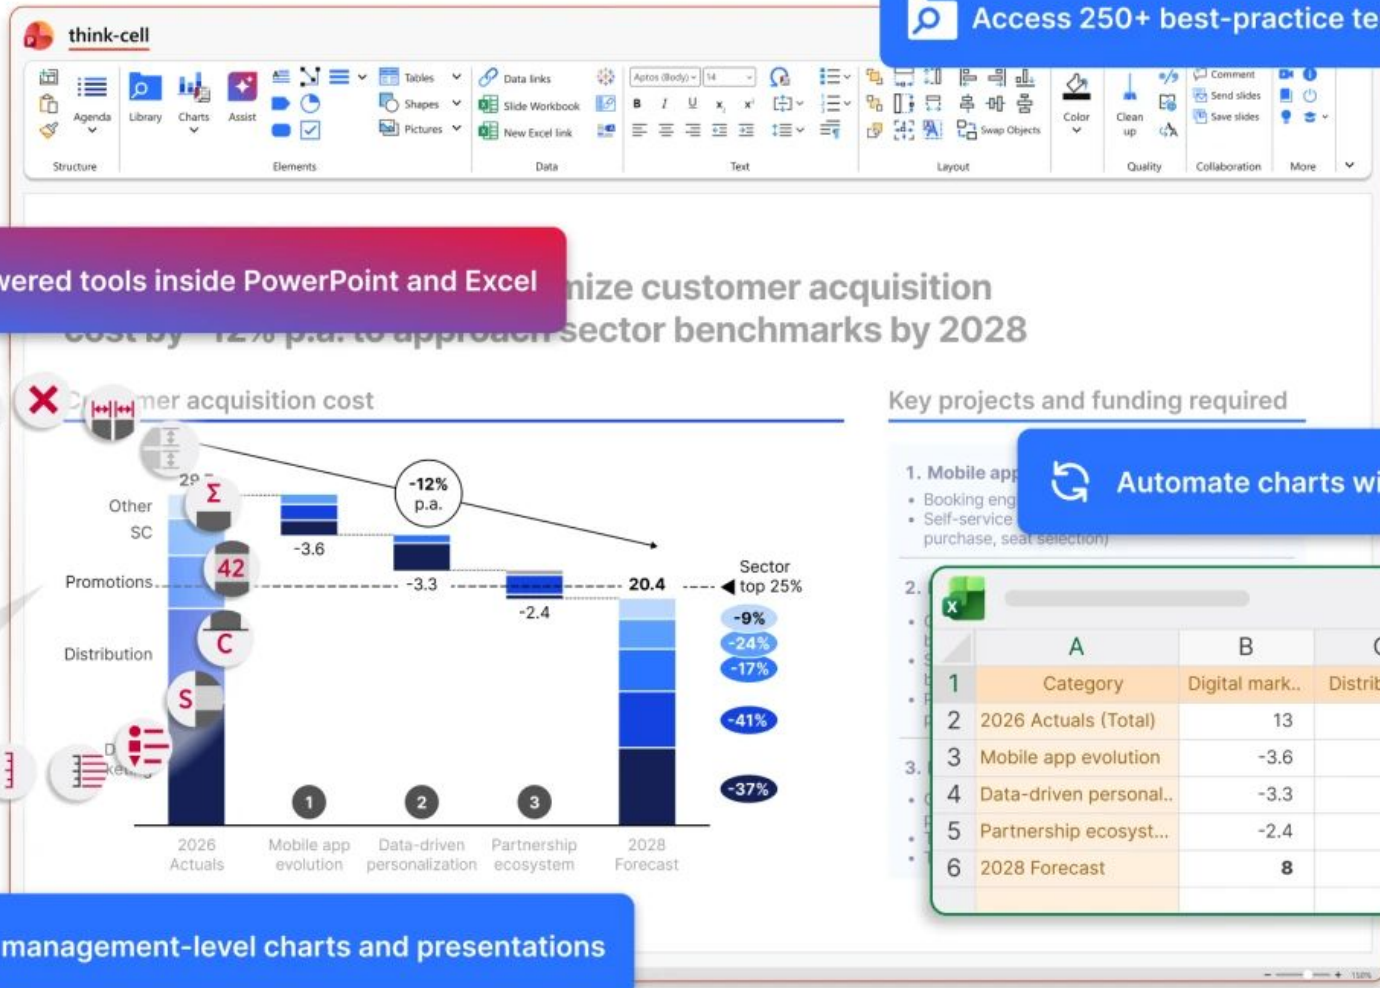

BOGREN DIGITAL



Linus Corneliusson

- BogrenDigital.com
- FascinationStreet.se
- Former mixing/editing engineer
- Ihsahn, James LaBrie, many more…
- Now: Plugin/DSP developer

Outline

1. Getting the code to run
2. Plugin from scratch: Part I
    a. with DSP research
3. Plugin from scratch: Part II
    a. with the Python prototype
4. **Break at 12 PM**
5. Plugin from scratch: Part III
    a. with C++/JUCE implementation
6. Summary & surprise

"Create a flanger as a VST3 plugin.

You have 24 hours."



Demo

What we'll create today

Task 0: Make the code run


Repo: github.com/JanWilczek/adc26-workshop

Goal: Execute these two commands:


- `python py/main.py data/guitar_5th.wav`
- `cmake --build --preset default`

➡️ *"Getting Started"* section of the README file


GitHub Codespaces: Fork the repo with all branches

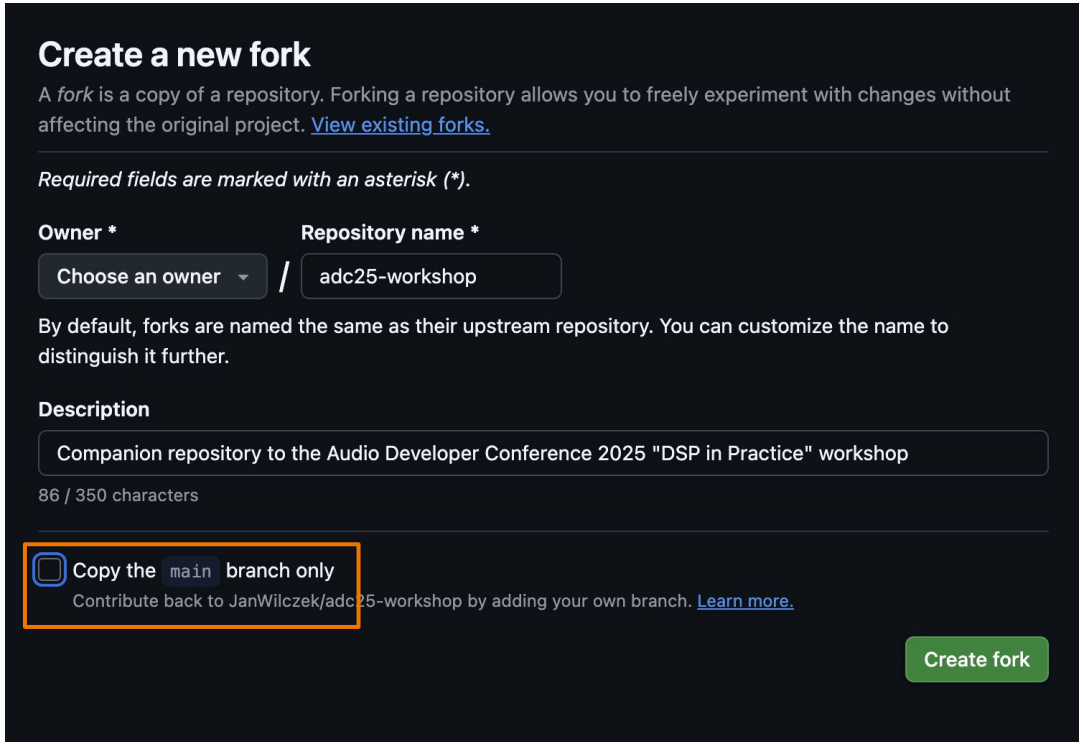

Overview of the plugin creation process



Overview of the plugin creation process

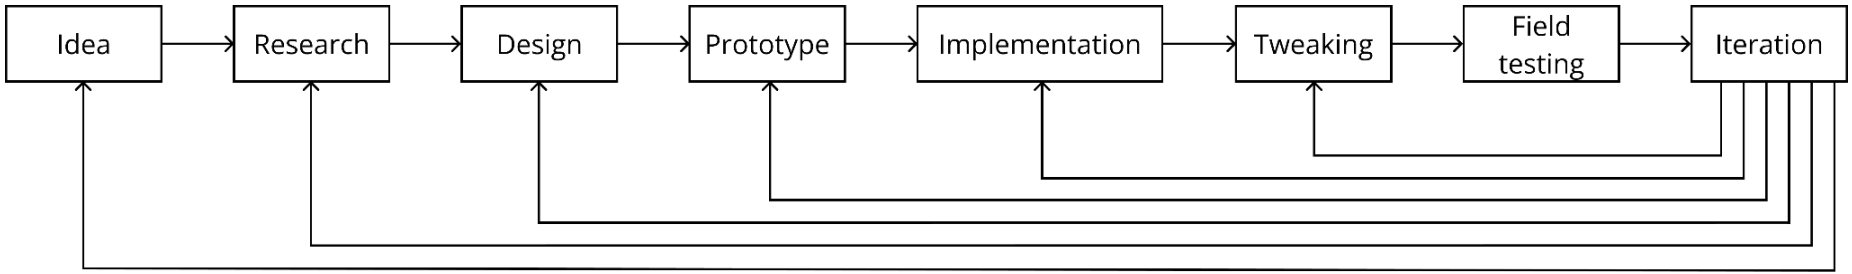

Idea

- What do you want to create?
- Why? How is it useful?
- For whom is it useful?
- Can I explain the above in plain words?

"Create a flanger as a VST3 plugin.

You have 24 hours."




Idea

Plugin we'll implement today: Flanger

Input:

Output:

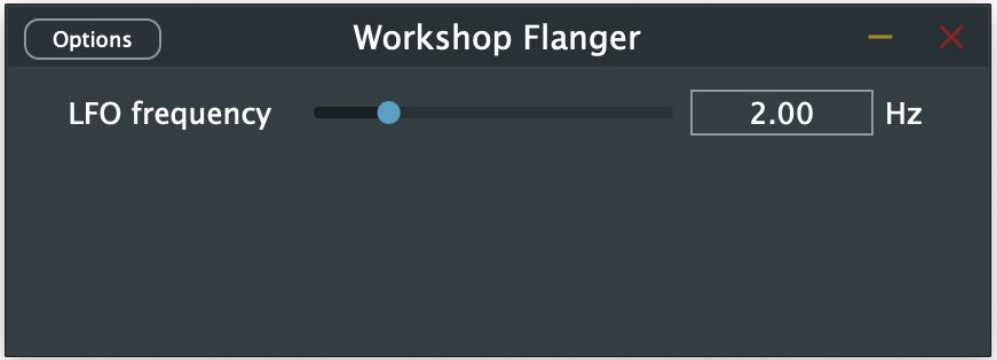

Research

- Has anyone done it before?
- Is there a baseline
  (a plugin or a piece of code that does a similar thing)?
- How to do it (better)?
- End goal: a design

Research sources

- Books
- Research papers
- Online blogs & videos
- Online forums
- External consultancy

Examples of good resources

- Books
  - *Digital Audio FX* by Udo Zölzer et. al.
  - *Designing Audio Effect Plugins In C++* by Will Pirkle
- Papers
  - DAFX conference
  - Audio Engineering Society library
  - Google Scholar
- Online blogs & videos
  - WolfSound 🐺

Examples of good resources


- Forums
  - JUCE forum
  - KVR Audio developer forum
  - DSP subreddit
  - DSP Stack Exchange
  - DIYStompBoxes
  - lines forum

Design

- DSP diagram
- Difference equations
- Textual description
- Literature reference
  - ”We will implement equations X-Y from paper Z”

Literature review


Udo Zölzer et. al.
Digital Audio FX
2nd ed. (2011)

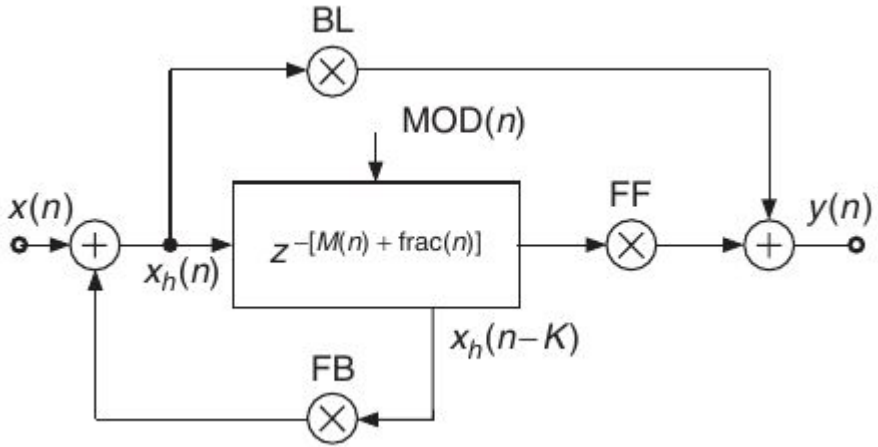

	BL	FF	FB	DELAY	DEPTH	MOD
Vibrato	0	1	0	0 ms	0–3 ms	0.1–5 Hz sine
Flanger	0.7	0.7	0.7	0 ms	0–2 ms	0.1–1 Hz sine
(White) Chorus	0.7	1	(−0.7)	1–30 ms	1–30 ms	Lowpass noise
Doubling	0.7	0.7	0	10–100 ms	1–100 ms	Lowpass noise

Literature review

J. Dattoro. Effect design, part 2: *Delay-line modulation and chorus*. J. Audio Eng. Soc., 45(10): 764–788, October 1997.

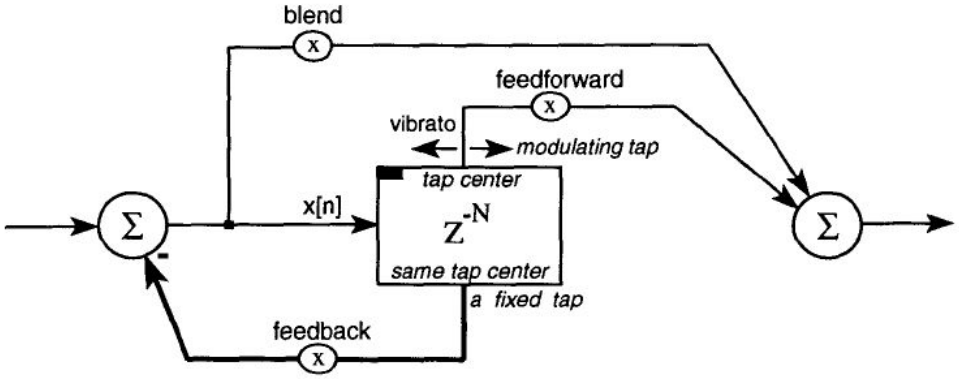


Effect	Blend	Feedforward	Feedback
Vibrato	0.0	1.0	0.0
Flanger	0.7071	0.7071	−0 7071
Industry standard chorus	1.0	0.7071	0.0
White chorus	0.7071	1.0	0.7071
Doubling	0.7071	0.7071	0.0
Echo[82]	1.0	≤1.0	<1.0


Table 7. Approximate effect delay range in milliseconds.

Effect	Onset	Nominal	Range End
Vibrato[83]	0	Minimal	5
Flange	0	1	10
Chorus	1	5	30
Doubling	10	20	100
Echo	50	80	∞

LFO: bipolar vs unipolar

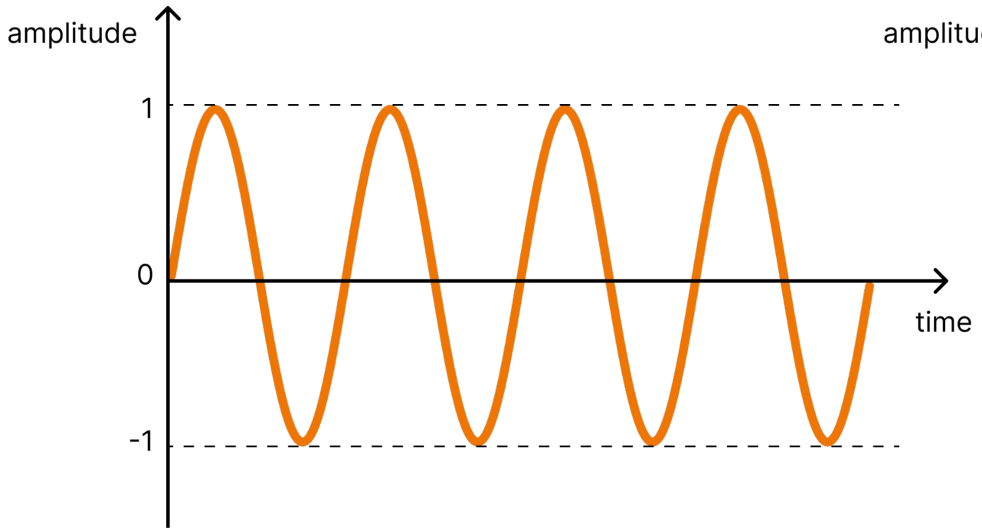


bipolar LFO

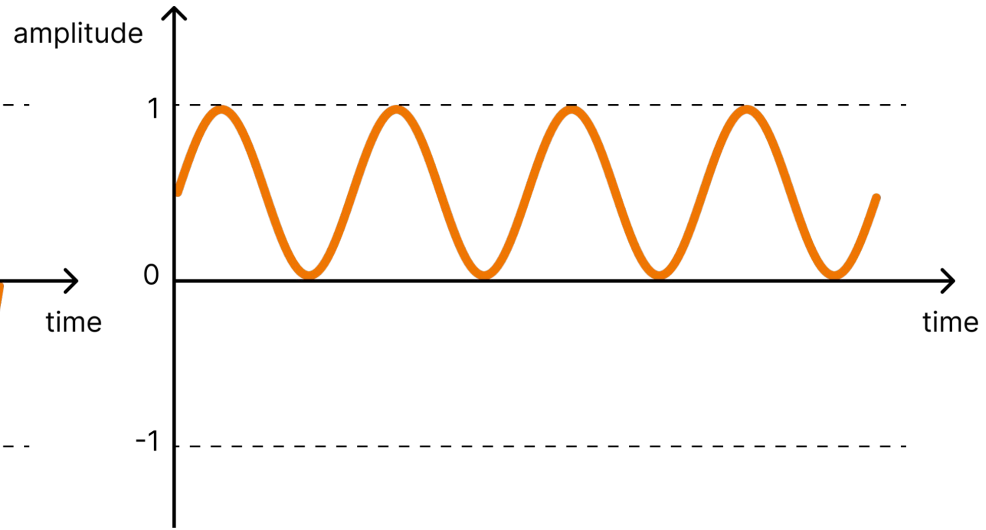

unipolar LFO

Task 1: Write down flanger update equations

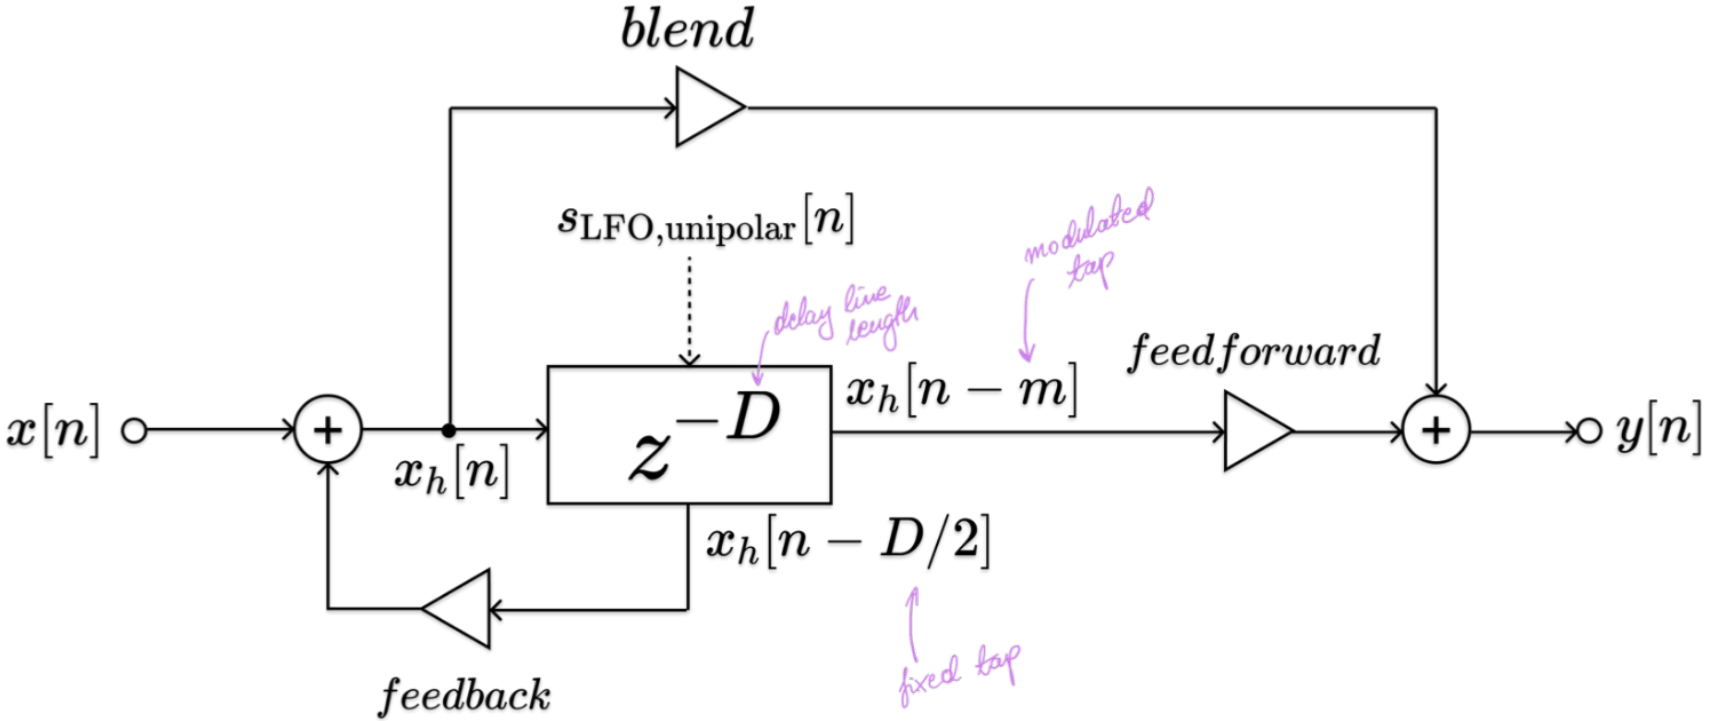

Update equations

3. Output sample

$$y[n] = \text{blend } x_h[n] + \text{feedforward } x_h[n - m]$$

2. Helper sample

$$x_h[n] = x[n] + \text{feedback } x_h[n - D/2]$$

1. Modulated-delay value

$$m = s_{\text{LFO,unipolar}}[n]D$$

Prototype

- Goal: Quick creation of the desired effect for validation
- Technologies used:
  - Graphical
    - PureData
    - Max/MSP
  - Interpreted
    - Python
    - Matlab
  - Domain-specific languages (DSLs)
    - Faust
    - SuperCollider
  - ?

Task 2: Prototype

1. `git checkout task2`
2. Run `python py/main.py data/saw200.0Hz5.0s.wav` and check that audibly the output signal is the same as the input signal
3. Inspect the spectrograms generated in the *output* folder. Are they identical visually?
4. Properly initialize the `Flanger` class instance
5. Implement flanger update equations without the LFO in `process_sample()` in *flanger.py*
6. Add an LFO

Break

Until 12:15 PM

Implementation (the DSP part)

- Typically done in C++ with JUCE
- Other options:
  - C?
  - JavaScript?
  - Rust?
  - ?

Implementation (the DSP part)

- Start with mono first
- Disregard parameter smoothing
- Focus on correctness, ignore optimization
- Generic GUI
  - e.g., `juce::GenericAudioProcessorEditor`
- End-2-end verification tests

C++ implementation tips

- Use github.com/JanWilczek/audio-plugin-template
  - Treat warnings as errors
- **Keep the design flexible**
- Commit early, commit often (but double-check what you commit)
- Use end-2-end unit tests (e.g., `wolfsound::ProcessorFileIoTest`)
- **Unit-test what you can**
- Don’t be afraid of writing pseudocode
- Use `juce::juce_dsp`-like interface for easy composability
  - `process(const ProcessContext&)`
  - `prepare()`
  - `reset()`

BUILDING A PLUGIN ASSEMBLY LINE

THE ROAD TO RAPID PLUGIN DEVELOPMENT


ADC24 Bristol





BENCE KOVÁCS &
LINUS CORNELIUSSON

C++ implementation: class diagram

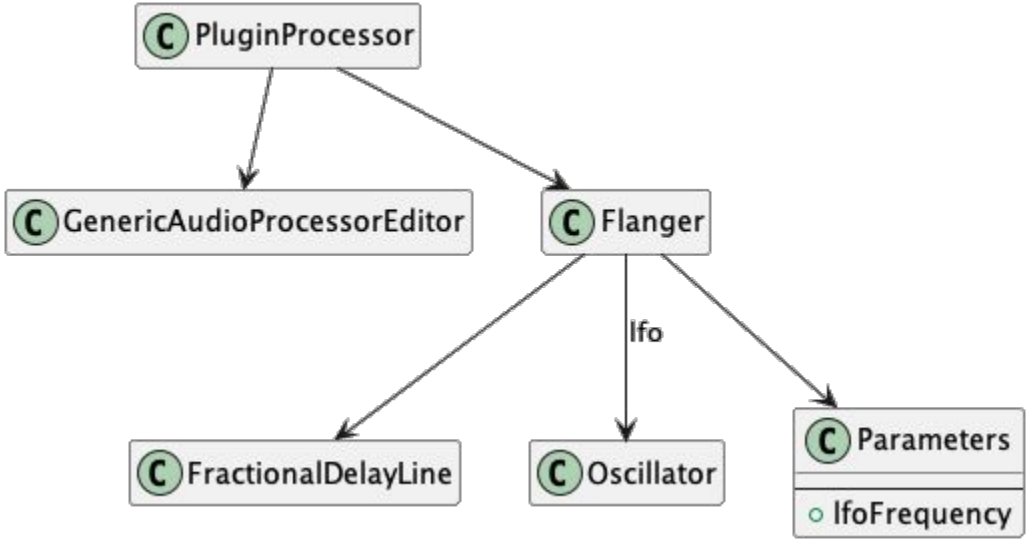

Task 3: Implementation part 1

1. `git checkout task3`
2. Build the C++ project
3. Run the end-2-end test
4. Test in a DAW
5. Implement `Flanger` member functions
    a. constructor
    b. `reset()`
    c. `prepare()`
    d. `processSample()`
6. Make the end-2-end test produce the same result as fixed-delay Python code

Tweaking parameters/experimentation

- "dev" parameters and "user" parameters
  - dev parameters will be fixed before releasing the plugin and inaccessible to the user
- Explore!
  - Expand the "allowed" range of parameters
  - Make some parameters unrealistic
  - "Model bending"

Task 4: Implementation part 2

1. `git checkout task4`
2. Add an LFO (e.g., `juce::dsp::Oscillator`) and check again the end-2-end test against Python output
3. Make parameters (LFO frequency) adjustable
   a. Create a `Flanger::Parameters` struct
   b. Create a setter for the parameters
   c. Set the parameters in `processBlock()`
   d. Create an `AudioProcessorValueTreeState`
   e. Add the LFO frequency parameter to the plugin
4. Return a `juce::GenericAudioProcessorEditor` in `PluginProcessor::createEditor()`
5. Test in a DAW
6. Make stereo using JUCE's `ProcessorDuplicator`

Field testing (beta testing, validation)

- Give the plugin to a representation of your user base
- In the worst case: test it just yourself

Iteration on the design/implementation

- Should we improve the design or the implementation?
  - Design 👉 back to the research phase
  - Implementation 👉 code tuning (optimization) according to well-defined metrics
- Establish approval metrics/criteria:
  - What is the desired behavior for a particular signal?
  - Is there a baseline that a particular use case should match?
  - Are any signal types problematic?
  - Are certain parameter configurations problematic?
  - Are certain signal elements problematic (e.g., transients, decays)?
  - How fast a piece of code should be?


MLC S_Zero 93
S_ZERO-9.5°
A B
Default Preset
BOGREN DIGITAL
IN
CAB
OUT
POWER
SL6
KT88
PRESENCE DEPTH
GATE
OFF ON
BASS MIDDLE TREBLE
GAIN
VOLUME MASTER
I II III
MODE
INPUT
S_ZERO-9.5°
SILENOZ SIGNATURE
REC
ULTRA-QUALITY


MLC S_Zero 93
S_ZERO-9.5°
A B
Default Preset
BOGREN DIGITAL
IN
CAB
OUT
OCTAVE 1
OCTAVE 2
DIRECT
FASCINATION STREET
OCTAVE
LEVEL
TONE
DISTORTION
MODE
MLC
BROWN SUGAR
LEVEL
TONE
DRIVE
FASCINATION STREET
OVD-2
REC
ULTRA-QUALITY

What we didn't cover

- Business side of plugin creation
  - Will my plugin sell?
  - Packaging for distribution
  - Selling
  - Distribution
- Code optimization (tuning)
- Presets
- Undo & redo
- …

Where to get more info on DSP & plugin dev

- WolfSound blog: TheWolfSound.com
- WolfSound YouTube: www.youtube.com/@WolfSoundAudio
- DSP Pro online course on learning digital signal processing for audio programming: wolfsoundacademy.com/dsp-pro
  - 20% special offer discount with promo code: ADC26_WORKSHOP (valid until December 10)
- Workshop feedback: jan.wilczek@thewolfsound.com