




# { } Exploring Exploitation

Cybersecurity Boot Camp  
Lesson 16.3



# Class Objectives

---

By the end of today's class, you will be able to:



Understand what command and control (C2) is and how it fits into a penetration tester's toolkit.



Use Metasploit to automate exploitation activities.



Explain what privilege escalation is and how it fits into the attack cycle.



Perform basic privilege-escalation tasks.



# The Five Stages of Pentesting Recap

---

On Day 1, we introduced the five stages of a pen testing engagement:

01A	Planning	Define the purpose and scope of the test, and sign all legal contracts.
01B	Reconnaissance	Obtain publicly available information about your target.
02	Scanning	Use tools to run a scan against your target to gather information, such as open ports, and run services to determine potential vulnerabilities.
03	Exploitation	Attack the vulnerabilities discovered in the previous steps in order to gain access to the target.
04	Post Exploitation	Gather valuable information from the compromised systems.
05	Reporting	Report on the previous five steps to provide a summary of actions taken, findings, and recommended mitigations.

# Day 2 Recap


---

**Scanning** is the second phase after Reconnaissance. Scanning utilizes tools to gather information such as network information and potential vulnerabilities.



We often use the tools Nessus, Hping, Nmap, and Zenmap to conduct scanning.

NSE (Nmap scripting engine) scripts are scripts that work with Nmap or Zenmap and are commonly used to test whether a service is vulnerable to an exploit.

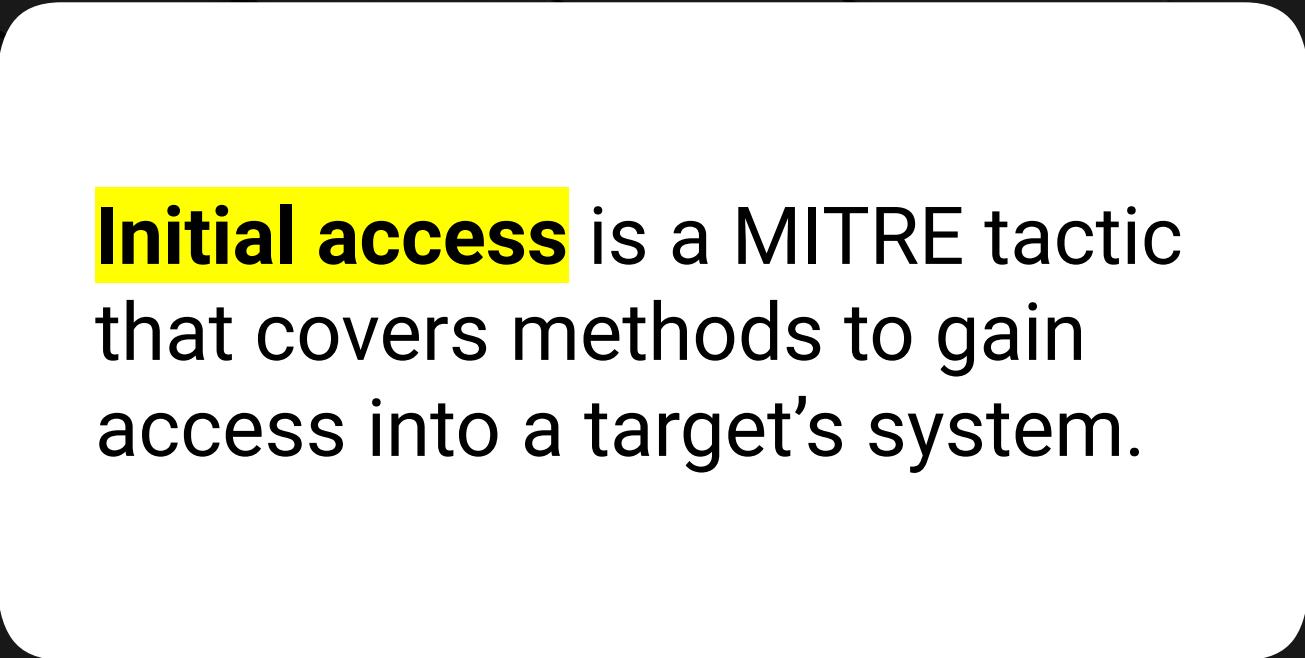



**Initial access** is a MITRE tactic  
that covers methods to gain  
access into a target's system.

# Phishing

---

Phishing is the most commonly used initial access method. It leverages human error by crafting misleading and convincing fraudulent emails.

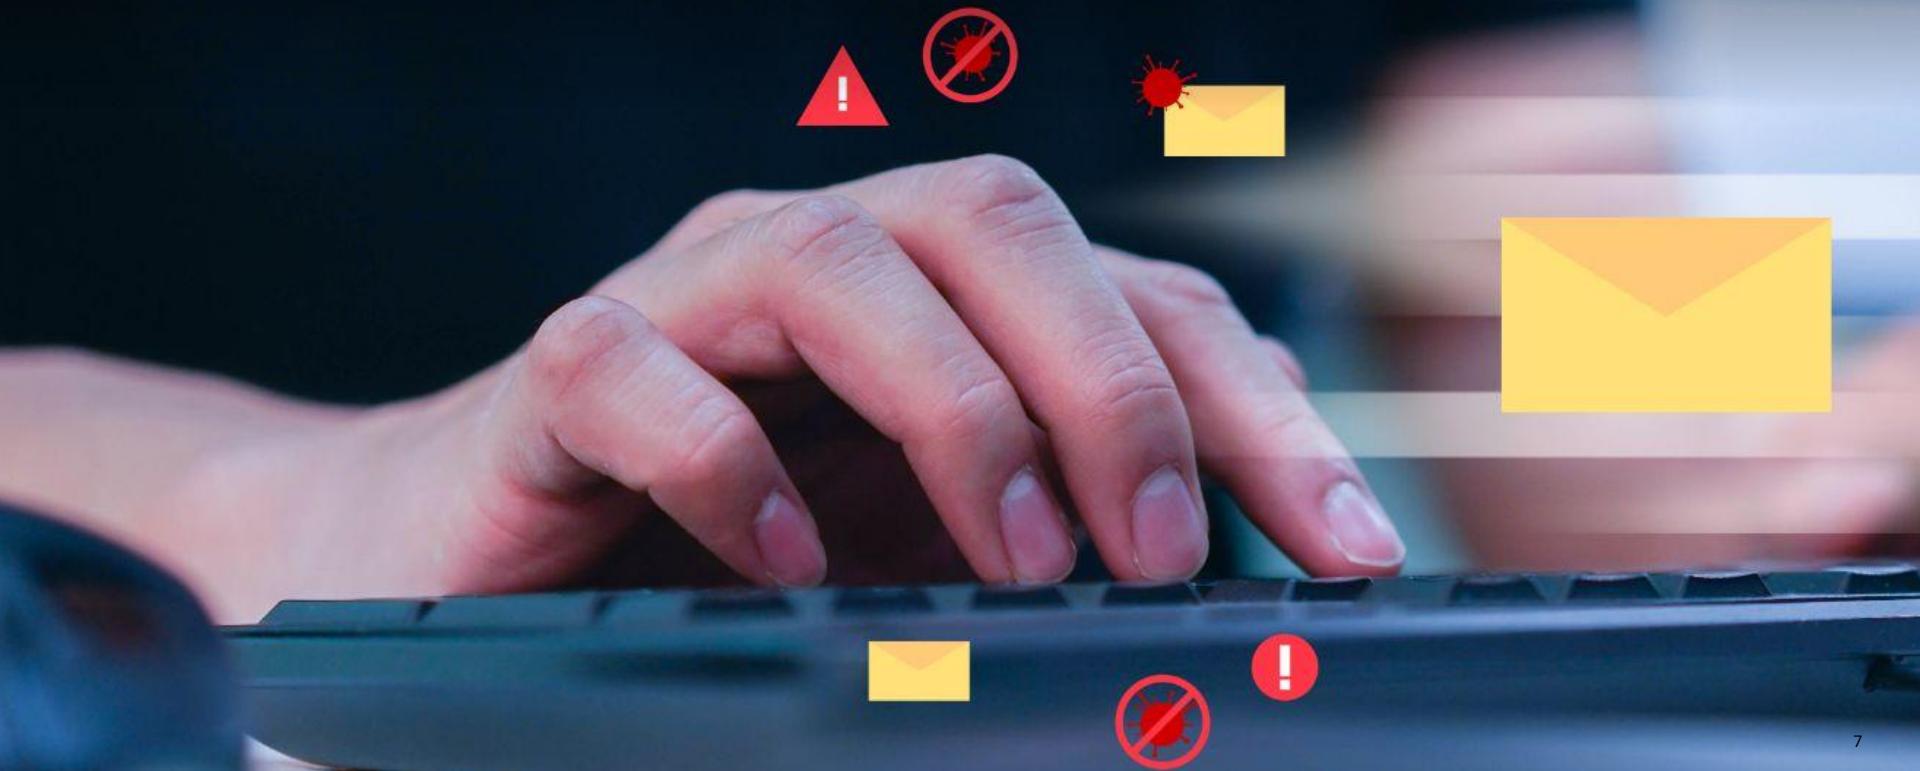

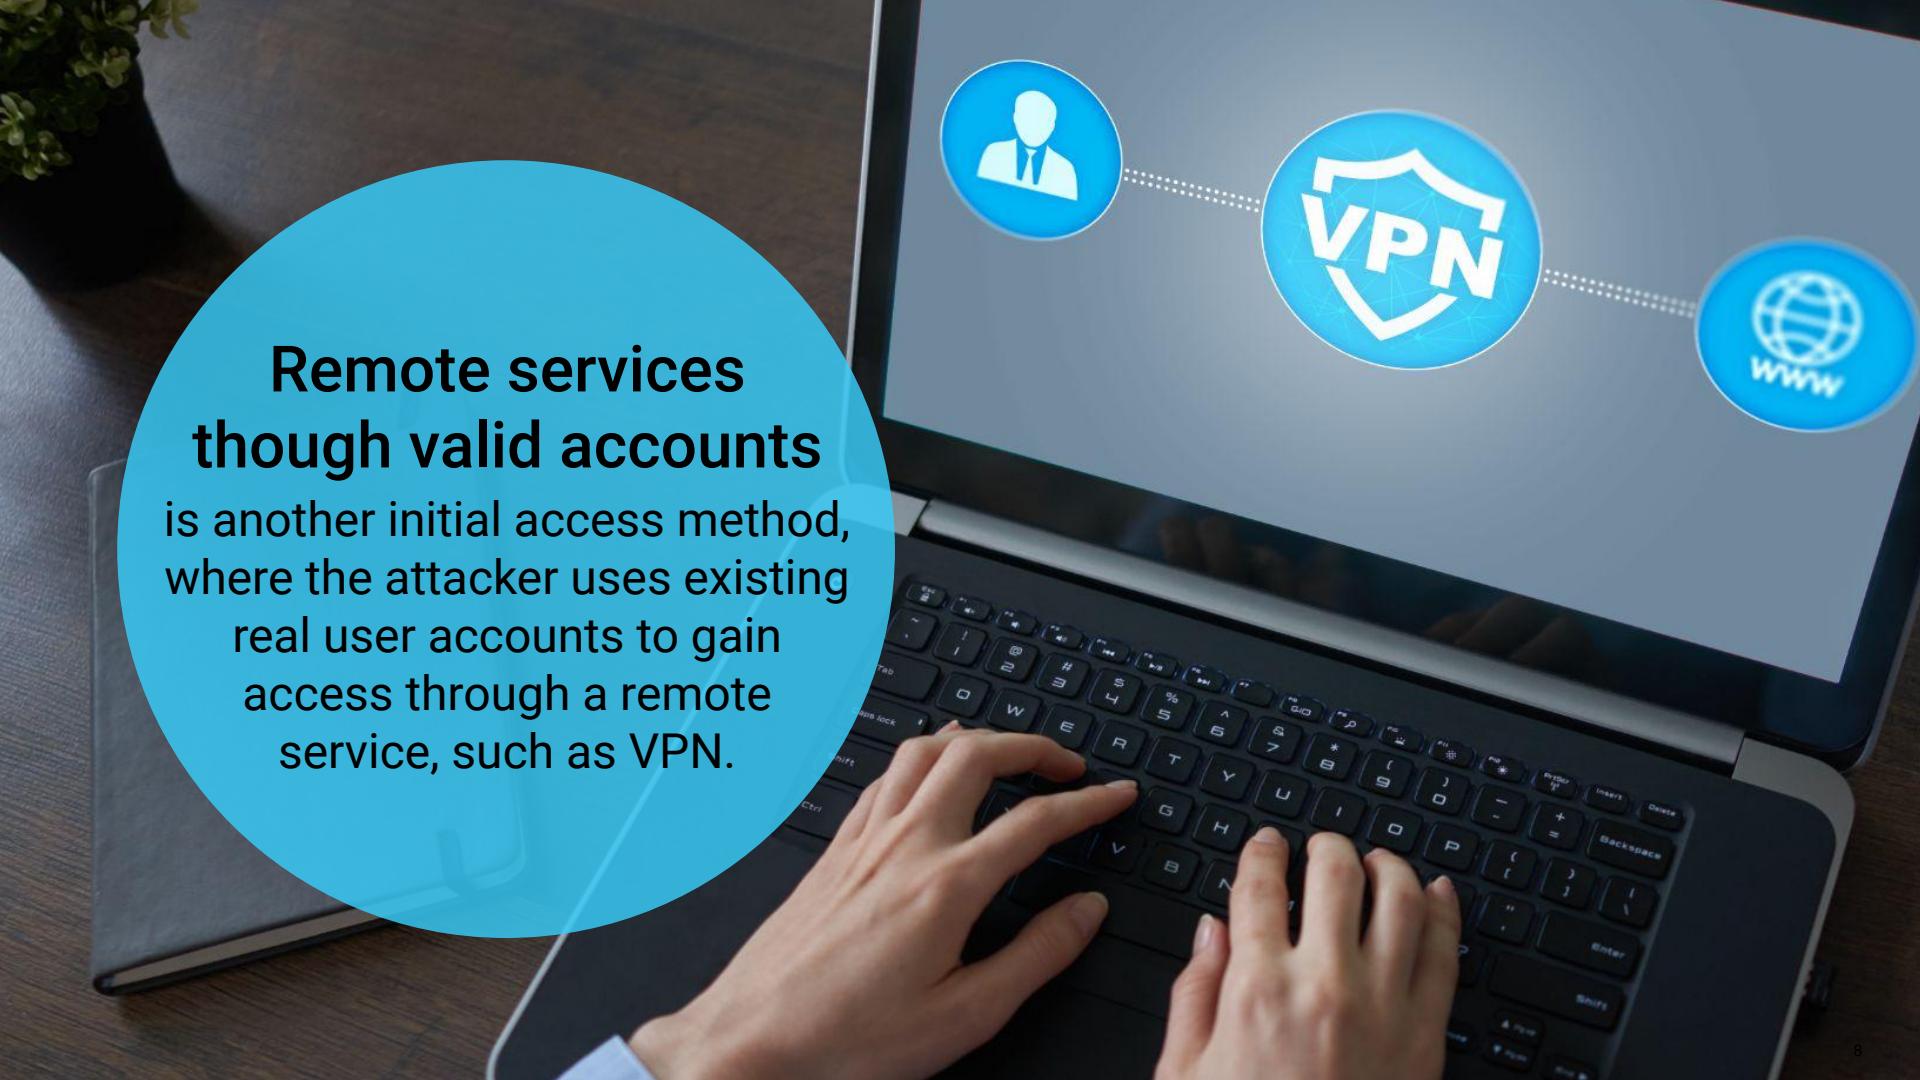

## **Remote services through valid accounts**


is another initial access method, where the attacker uses existing real user accounts to gain access through a remote service, such as VPN.



# Day 2 Recap

**Exploit-DB.com** is a popular online database that contains publicly disclosed exploits, cataloged according to their Common Vulnerability and Exposure (CVE) identifiers.

SearchSploit is a command line utility for Exploit-DB that allows you to take an offline copy of the entire Exploit Database with you wherever you go.

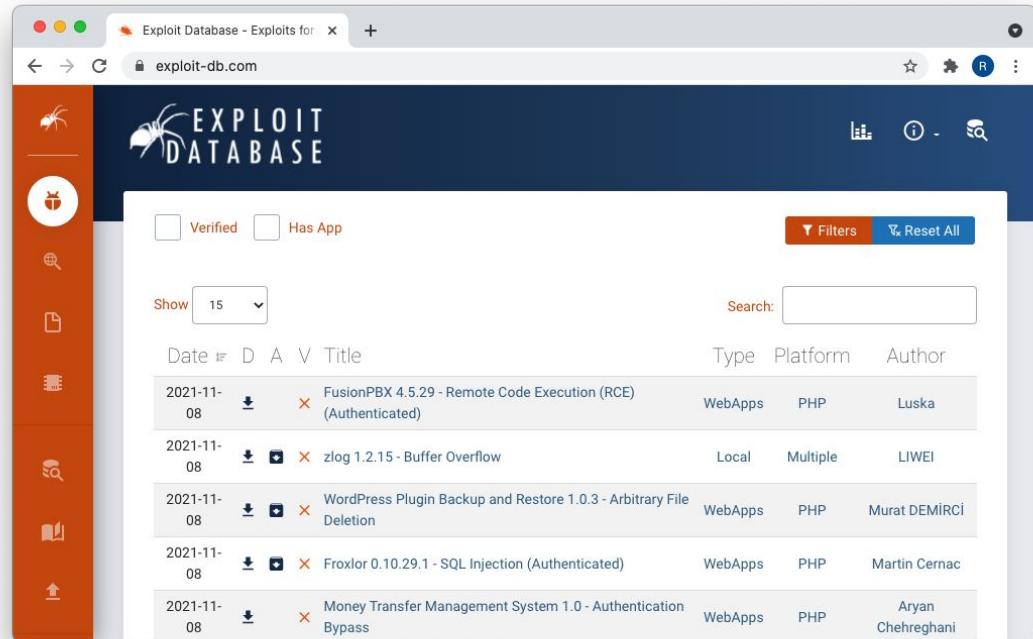

# Exploitation

---

Exploited access to the machine is typically granted in the form of terminal access, known as a **shell**. There are two types of shells:

## Bind shell

The remote host opens a port for the current host to connect to.

The current, local host then connects to that remote host's port.

## Reverse shell

The remote host connects back to a port on the local host.

We ended Day 2's lesson by starting the **Exploitation phase (Phase 3)** and manually exploiting a remote host's vulnerable service to obtain a reverse shell.

- Today, we will begin by covering command and control (C2) and Metasploit.
- Then, we'll use Metasploit to exploit another vulnerability and gain another shell on a remote host.



Reporting

Post Exploitation

Exploitation

Scanning

Planning and  
Reconnaissance

The day will conclude with a **privilege-escalation activity** to escalate from a low-privileged user to root.



Planning and  
Reconnaissance

Scanning

Exploitation

Post Exploitation

Reporting

# Command and Control

**Command and control (C2)** is a framework that consists of tools and techniques that attackers use to maintain communication with compromised devices following initial exploitation.

# Command and Control

---



C2 frameworks come in a variety of languages and are developed by individuals and companies alike.



The majority of C2 frameworks are open source, meaning that the public can read the source code and they're free. But a few are closed sourced and must be paid for.



We will learn about a variety of C2 frameworks, but for the purposes of this class, we'll use the **Metasploit** framework.

Metasploit is a popular and open source C2 framework maintained by Rapid7.



- [Get Started >](#)
- [Contribute >](#)
- [Docs >](#)
- [Help >](#)
- [Download](#)

#### Join Us On

- [!\[\]\(858b895d2d81c819fd5bd63547df3684\_img.jpg\) Slack](#)
- [!\[\]\(00880f06c10da649aa95a48e9a49fa0c\_img.jpg\) IRC](#)
- [!\[\]\(2db8481986547104170ba97749716355\_img.jpg\) GitHub](#)
- [!\[\]\(da195c481bfdeb2c87c04a9bc68e3b8e\_img.jpg\) Twitter](#)

## metasploit®

The world's most used penetration testing framework

Knowledge is power, especially when it's shared. A collaboration between the open source community and Rapid7, Metasploit helps security teams do more than just verify vulnerabilities, manage security assessments, and improve security awareness; it empowers and arms defenders to always stay one step (or two) ahead of the game.

 Star 25,556



### Get Metasploit

#### OPEN SOURCE

Metasploit Framework

[Download](#)

#### COMMERCIAL SUPPORT

Metasploit Pro

[Free Trial](#)

Latest

Latest

Get visibility into your network with Rapid7's InsightVM

[30-Day Trial](#)

[Compare Features >](#)

[View More Projects >](#)

# C2 Architecture

---

C2 frameworks work within a C2 architecture, which consists of:

01

C2 server

The attacker's server, where the attacker communicates with the compromised machines.

02

C2's agents

The payload that is run on the compromised machine in order to open up a connection back to the C2 server.

# C2 Architecture

---

A C2 architecture is how the C2 server is set up and how the agent communicates back to the C2 server.



In order to compromise a machine, the C2 agent must be running on it.



Fortunately, most C2 frameworks have a built-in capability to generate an agent.



The agent typically runs as a process and needs to run continuously in order for communication to flow consistently between it and the C2 server.



Metasploit's agent is built into the code of its exploits.

# Zombies and Botnets

---

Once the machine has the C2's agent running on it, it is compromised—sometimes referred to as a **zombie**.




Zombie

# Zombies and Botnets

---


Multiple zombies form a **botnet**.

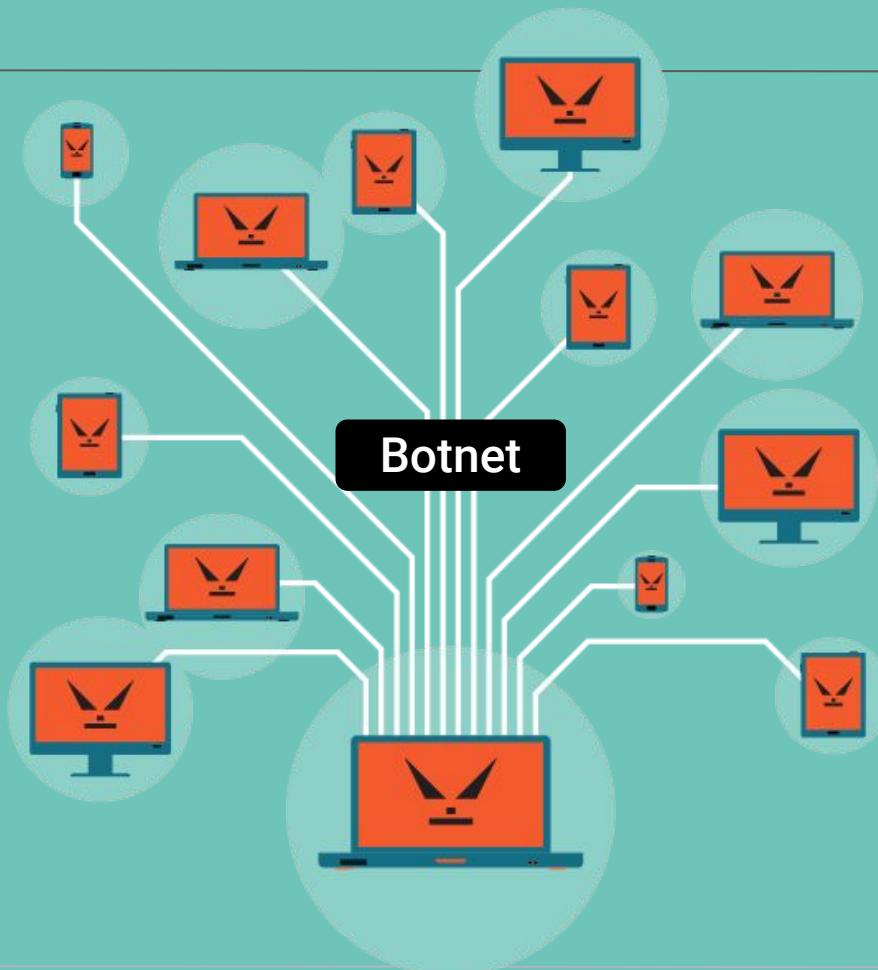

# Zombies and Botnets

---

The entire botnet of compromised machines is controlled through the single C2 server.

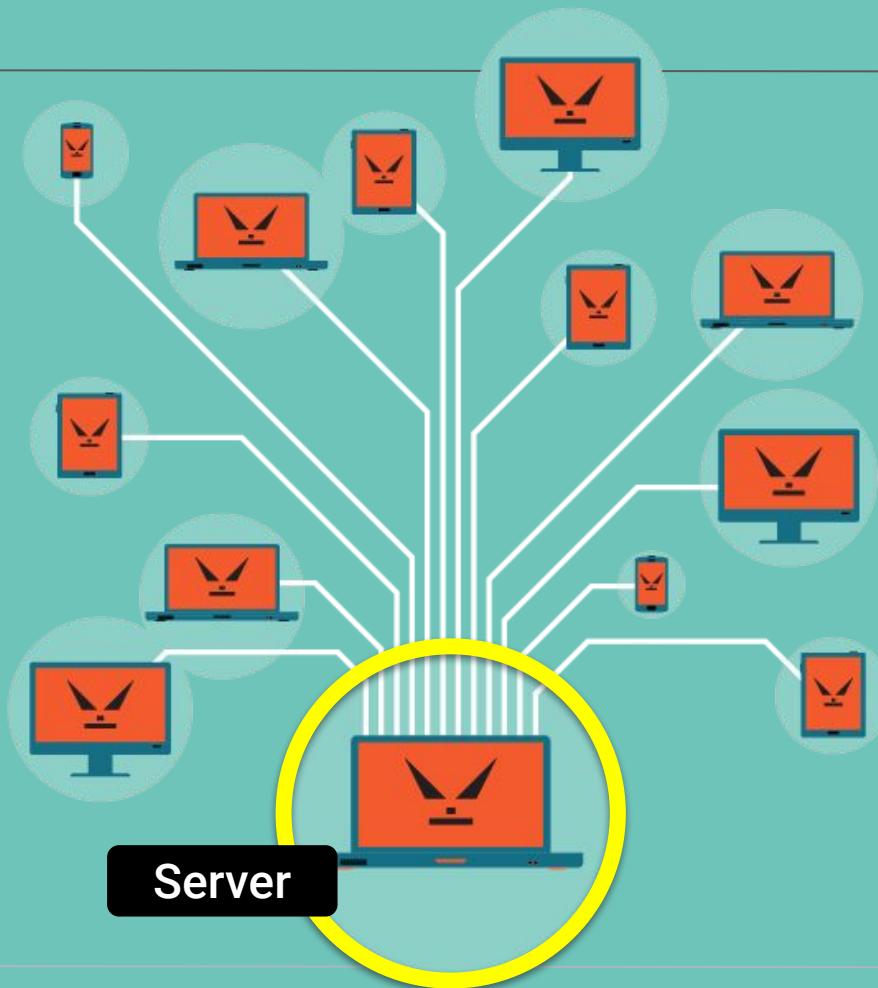

# Concealing the C2 Server



It is very important that a penetration tester conceal the C2 server in order to avoid detection.

# Concealing the C2 Server

---

## Method 1

Redirection  
through proxies

## Method 2

Utilizing multiple  
channels


## Method 3

Utilizing multiple  
C2 frameworks

# Method 1: Redirection Through Proxies

We will use a host that directly connects to the C2 server for simplicity. However, in a real penetration test, that would be a poor decision, because a simple packet collection would detect the C2 server IP, which could be blocked.

To avoid this detection, a pentester could have the C2 redirected through proxies.

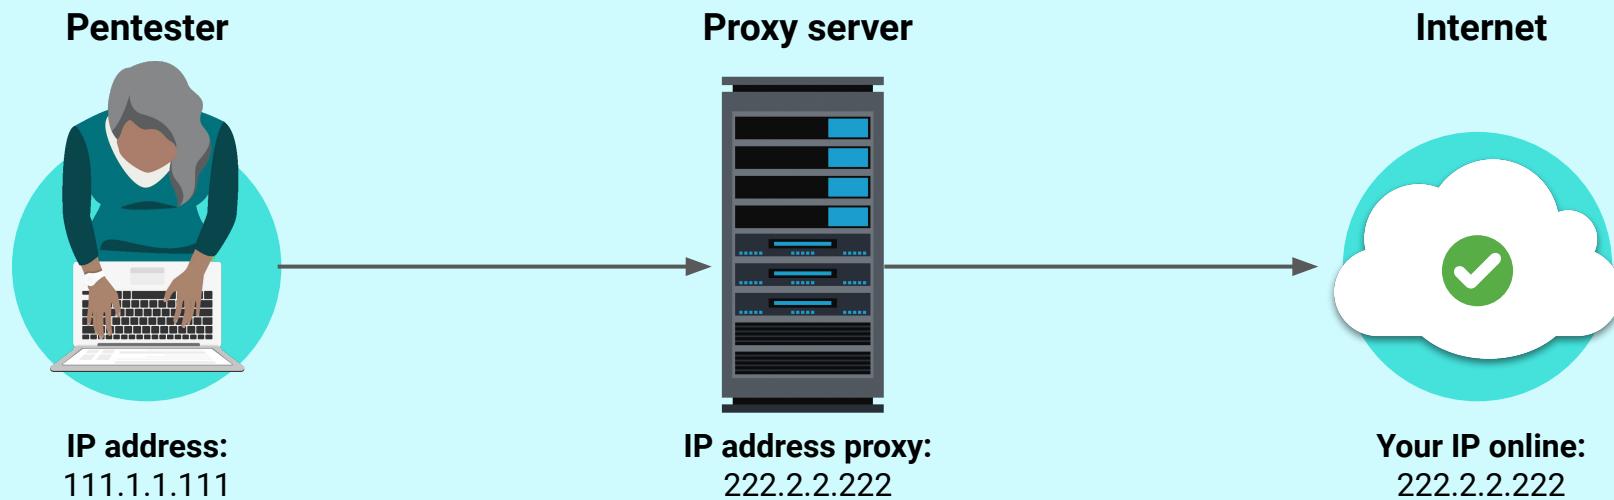


## Method 2: Utilizing Multiple Channels

Another method that most C2 frameworks support is having the agent use multiple ways, or **channels**, to communicate back to the server.


A compromised host can communicate using either a single channel or several channels over various protocols.

**Some of these protocols include:**

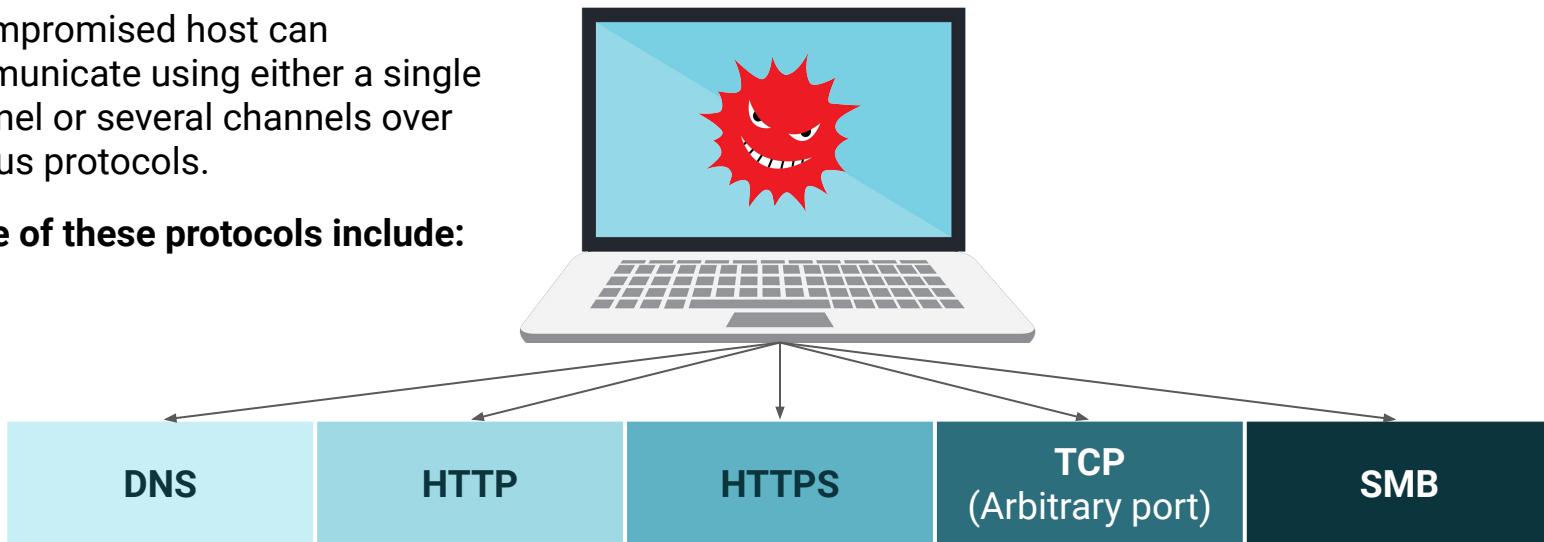

## Method 2: Utilizing Multiple Channels

The protocol used is dependent on the target's network firewall egress rules. Most egress rules allow HTTP/S and DNS outbound, which is why those channels are commonly used for C2 communication.

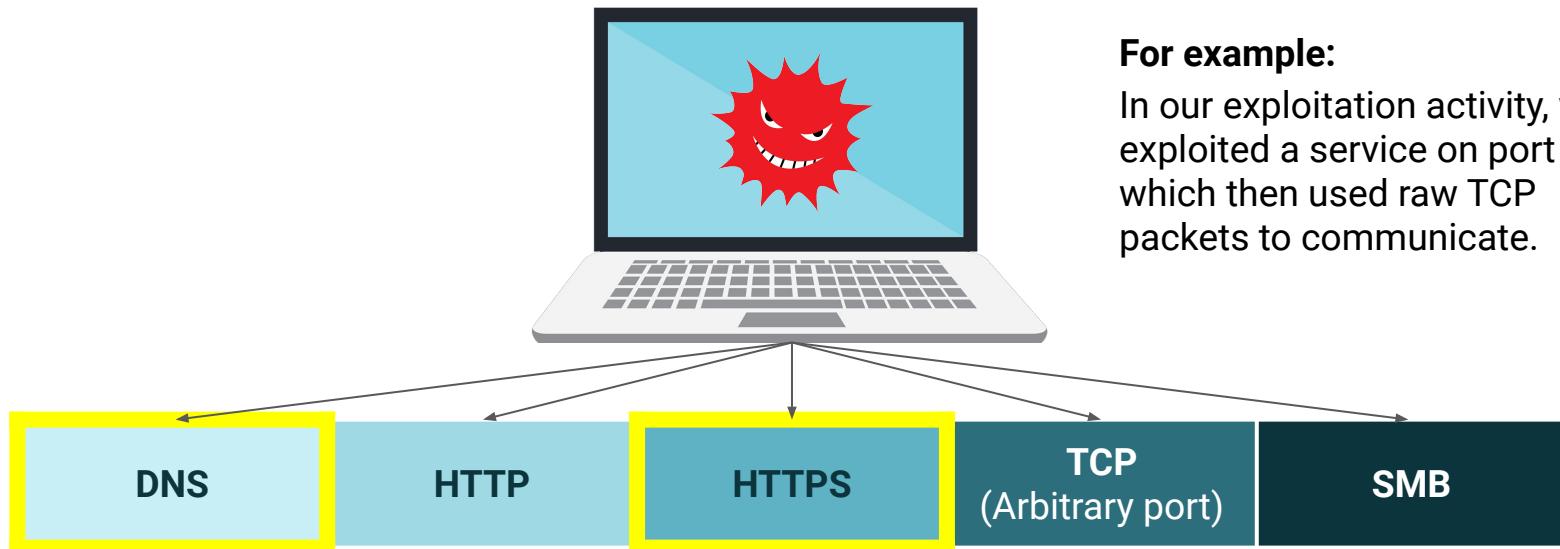

### For example:

In our exploitation activity, we exploited a service on port 21, which then used raw TCP packets to communicate.

While we will only use the **Metasploit** C2 framework in this class, most C2 frameworks are open source, which allows you to use them freely.

---

It's good practice to have multiple C2 frameworks available for a penetration test or red team engagement.



# Method 3: Utilizing Multiple C2 Frameworks

C2 frameworks each have their own “fingerprints” or “indicators of compromise.”



For example, Metasploit’s payload and agent generator, `msfvenom`, will generate a payload in a specified format (e.g. `.exe`), with some consistent internal binary structure.



These payloads have well-known signatures (binary structure), and many antivirus products will alert on them and kill the payload.




In an event where a certain AV product is killing the payload during or after execution, it may be a good idea to switch C2 frameworks.



## Method 3: Utilizing Multiple C2 Frameworks


---

Not all C2 frameworks support every OS. Some only support Windows, not Linux, for example.

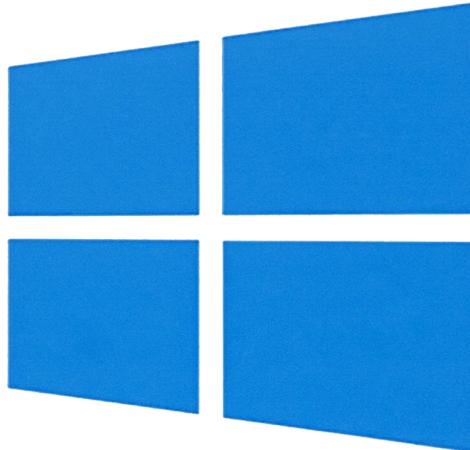

It's good to have a secondary C2 framework that supports an OS if the primary C2 framework doesn't support it.

To select the best C2 framework for a given project's requirements, a penetration tester could use the website [C2 Matrix](#).

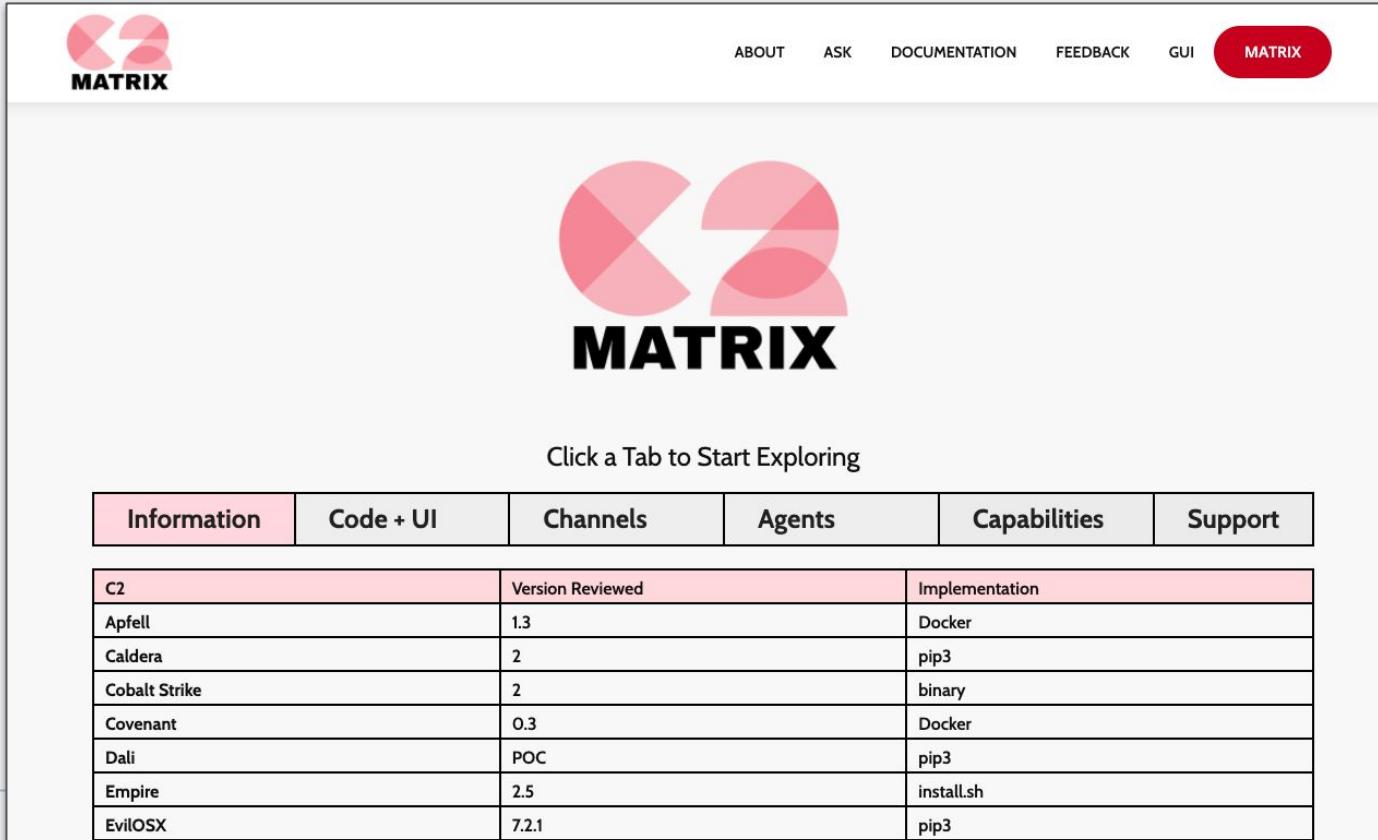

The screenshot shows the homepage of the C2 Matrix website. At the top left is the C2 Matrix logo, which consists of a stylized 'C2' icon made of overlapping pink semi-circles above the word 'MATRIX' in bold black capital letters. At the top right is a navigation bar with links: 'ABOUT', 'ASK', 'DOCUMENTATION', 'FEEDBACK', 'GUI', and 'MATRIX'. The 'MATRIX' link is highlighted with a red rounded rectangle. Below the logo is a large version of the same 'C2 MATRIX' graphic. Underneath it is a call-to-action button with the text 'Click a Tab to Start Exploring'. Below this is a horizontal navigation bar with six tabs: 'Information' (highlighted in pink), 'Code + UI', 'Channels', 'Agents', 'Capabilities', and 'Support'. A table below the tabs lists various C2 frameworks with their implementation details. The table has three columns: 'C2', 'Version Reviewed', and 'Implementation'. The rows are as follows:

C2	Version Reviewed	Implementation
Apfell	1.3	Docker
Caldera	2	pip3
Cobalt Strike	2	binary
Covenant	0.3	Docker
Dali	POC	pip3
Empire	2.5	install.sh
EvilOSX	7.2.1	pip3



# Instructor Demonstration

---

## C2 Matrix

# C2 Matrix Demo

---

For this demonstration, we've been tasked with selecting a C2 framework that meets the following requirements:

-  It must support the channels of HTTP and SMB.
-  It must support Windows.
-  It must provide logging.

# C2 Matrices

---

<b>Information</b>	Contains the version number reviewed.
<b>Code + UI</b>	Contains the server and agent language used.
<b>Channels</b>	Contains the supported channels.
<b>Implant</b>	Contains the supported OS for agents.
<b>Capabilities</b>	Contains other available capabilities.
<b>Support</b>	Contains the additional support provided.

# Summary

---

Can you define the following terms?



C2



C2 architecture



C2 agent



Zombie



Botnet



# Activity: C2 Research

In this activity, you will research various C2 frameworks and choose the one(s) most appropriate for your MegaCorpOne engagement.

Suggested Time:

---

15 Minutes



Time's Up! Let's Review.

# Questions?





# Metasploit

# Metasploit

---



Metasploit is a C2 framework that was created in 2003 and is owned by the company Rapid7.



There's a free version, which comes installed on Kali by default, and a professional version, which expands on its exploitation and C2 capabilities.



Metasploit contains a suite of tools for hacking servers and other networked devices.



Metasploit also has tools for port and service scanning as well as enumeration.




In addition to exploitation and scanning, Metasploit lets you save the results of scans to a database for easy review.

# Metasploit

---

The main Metasploit tools that we'll focus on are:

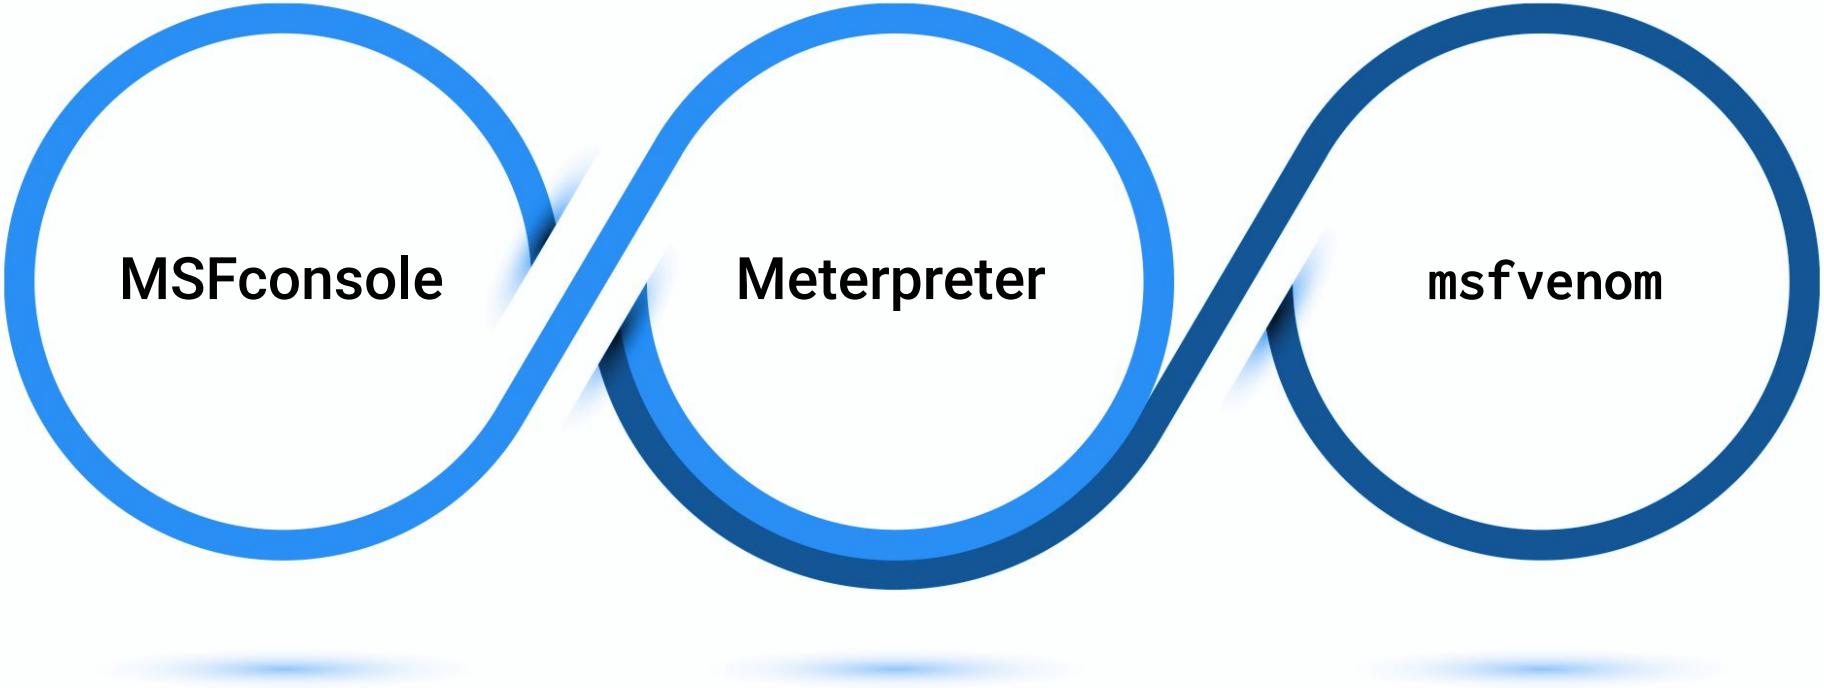

MSFconsole

Meterpreter

msfvenom

# MSFconsole

The main interface for Metasploit. Offers a centralized console to access all the options and modules. MSFconsole runs on your local machine, not on the machines you compromise.

```
File Edit View Search Terminal Help
root@kali:~# msfconsole -h
Usage: msfconsole [options]

Common options
  -E, --environment ENVIRONMENT  The Rails environment. Will use RAIL_ENV environment variable if that is set. Defaults to production if neither option nor RAILS_ENV environment variable is set.

Database options
  -M, --migration-path DIRECTORY  Specify a directory containing additional DB migrations
  -n, --no-database               Disable database support
  -y, --yaml PATH                 Specify a YAML file containing database settings

Framework options
  -c FILE                         Load the specified configuration file
  -v, --version                   Show version

Module options
  --defer-module-loads            Defer module loading unless explicitly asked.
  -m, --module-path DIRECTORY    An additional module path

Console options:
  -a, --ask                        Ask before exiting Metasploit or accept 'exit -y'
  -d, --defanged                  Execute the console as defanged
  -L, --real-readline              Use the system Readline library instead of RbReadline
  -o, --output FILE                Output to the specified file
  -p, --plugin PLUGIN              Load a plugin on startup
  -q, --quiet                      Do not print the banner on startup
  -r, --resource FILE              Execute the specified resource file (- for stdin)
  -x, --execute-command COMMAND   Execute the specified string as console commands (use ; for multiples)
  -h, --help                       Show this message

root@kali:~#
```

# Meterpreter

---

A Linux-style shell that Metasploit launches when you successfully break into a target machine. Unlike MSFconsole, Meterpreter runs on the machines you compromise, not on your local machine.

```
meterpreter > help

Core Commands
=====
Command      Description
-----
?            Help menu
background   Backgrounds the current session
channel     Displays information about active channels
...snip...
```

# msfvenom

Allows the operator to craft the malicious agents and payloads that will be used to communicate back with Metasploit.

These agents and payloads can be created in several formats, including:

- .exe
- .py
- bash
- and much more

```
File Edit View Search Terminal Help
root@kali:~# msfvenom -h
Error: MsfVenom - a Metasploit standalone payload generator.
Also a replacement for msfpayload and msfencode.
Usage: /usr/bin/msfvenom [options] <var=val>

Options:
  -p, --payload      <payload>      Payload to use. Specify a '--' or stdin to use custom payloads
  --payload-options <>             List the payload's standard options
  -l, --list         [type]        List a module type. Options are: payloads, encoders, nops, all
  -n, --nopsled     <length>       Prepend a nopsled of [length] size on to the payload
  -f, --format      <format>       Output format (use --help-formats for a list)
  --help-formats    <>             List available formats
  -e, --encoder     <encoder>      The encoder to use
  -a, --arch        <arch>        The architecture to use
  --platform        <platform>     The platform of the payload
  --help-platforms <>             List available platforms
  -s, --space       <length>       The maximum size of the resulting payload
  --encoder-space   <length>       The maximum size of the encoded payload (defaults to the -s value)
  -b, --bad-chars   <list>        The list of characters to avoid example: '\x00\xff'
  -i, --iterations  <count>       The number of times to encode the payload
  -c, --add-code    <path>        Specify an additional win32 shellcode file to include
  -x, --template    <path>        Specify a custom executable file to use as a template
  -k, --keep         <>             Preserve the template behavior and inject the payload as a new thread
  -o, --out          <path>        Save the payload
  -v, --var-name    <name>        Specify a custom variable name to use for certain output formats
  --smallest        <>             Generate the smallest possible payload
  -h, --help         <>             Show this message
root@kali:~#
```



Today, we will focus on MSFconsole.  
We'll explore Meterpreter and  
msfvenom in depth in future classes.

# Metasploit Modules

---


MSFconsole is a unified interface for a variety of functions.  
Each of these functions is called a **module**.

<b>Auxiliary modules</b>	Used for information gathering, enumeration, and port scanning. Can also be used for things like connecting to SQL databases and performing man-in-the-middle attacks.
<b>Exploit modules</b>	Generally used to deliver exploit code to a target system.
<b>Post modules</b>	Offers post-exploitation tools such as the ability to extract password hashes and access tokens. Provides modules for taking a screenshot, key-logging, and downloading files.
<b>Payload modules</b>	Used to create malicious payloads to use with an exploit. If possible, the aim is to upload a copy of Meterpreter, which is Metasploit's default payload.
<b>Encoder modules</b>	Encoders ensure that payloads make it to their destination intact.




The choice of module depends on  
what you're trying to accomplish.

If the goal is to **exploit a vulnerability**...

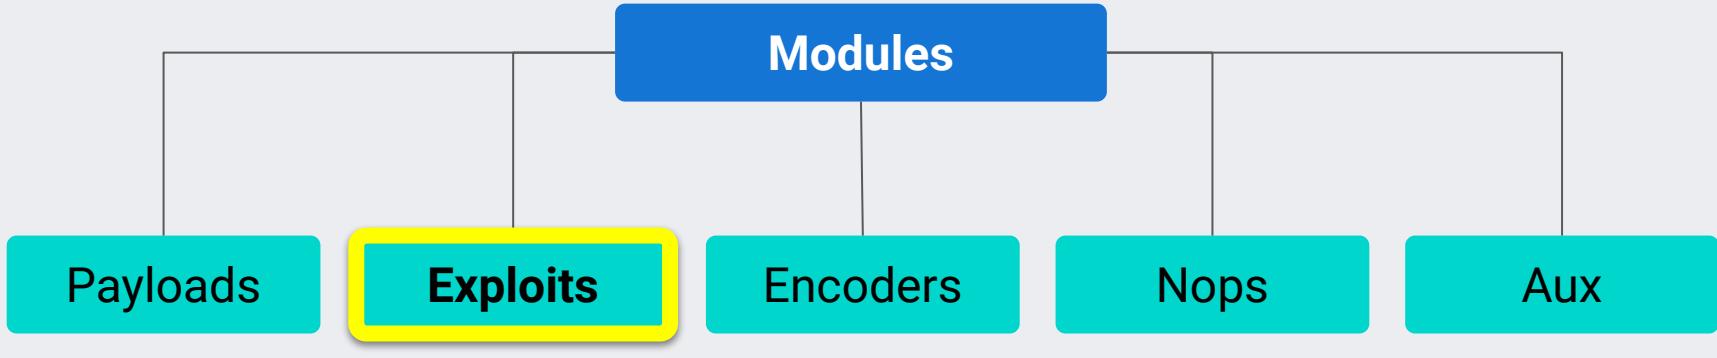

...then an exploit module is appropriate,  
as it actively tries to exploit the vulnerability.

# If **recon** is the goal...

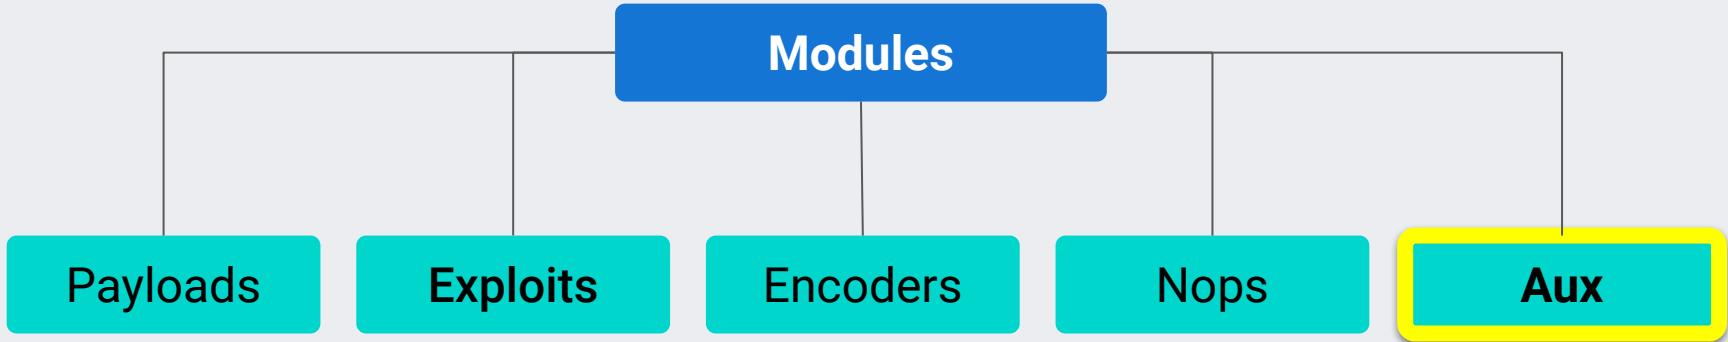

...then an auxiliary module is typically the right solution, as they're primarily for recon, scanning, and fuzzing.



# Instructor Demonstration

---

## Metasploit

# Metasploit Demo

---

01

Launch MSFconsole.

02

Search for the commonly used auxiliary module **ftp/anonymous**, as this module can indicate if the target allows anonymous logins via FTP.

03

Select the **ftp/anonymous** module.

04

Set the required values for the **ftp/anonymous** module.

05

Execute the module.



Metasploit is a popular C2 framework that contains a suite of tools for enumerating and exploiting servers and other networked devices.



- [Get Started >](#)
- [Contribute >](#)
- [Docs >](#)
- [Help >](#)
- [Download](#)

## metasploit®

The world's most used penetration testing framework

Knowledge is power, especially when it's shared. A collaboration between the open source community and Rapid7, Metasploit helps security teams do more than just verify vulnerabilities, manage security assessments, and improve security awareness; it empowers and arms defenders to always stay one step (or two) ahead of the game.

Star 25,556



Join Us On



### Get Metasploit

OPEN SOURCE

Metasploit Framework

[Download](#)

COMMERCIAL SUPPORT

Metasploit Pro

[Free Trial](#)

Latest

Latest

Get visibility into your network with Rapid7's InsightVM

[30-Day Trial](#)

[Compare Features >](#)

[View More Projects >](#)

# Metasploit

---

The main tools of Metasploit are:

## **MSFconsole**

The main interface for Metasploit, which runs on your local machine.

## **Meterpreter**

A Linux-style shell that runs on the machines you compromise.

## **msfvenom**

Allows the operator to craft the malicious agents and payloads that will be used to communicate back with Metasploit.

# Metasploit Modules

---

MSFconsole is a unified interface for a variety of functions.

The five main types of Metasploit modules are:

<b>Auxiliary modules</b>	Used for information gathering, enumeration, and port scanning.
<b>Exploit modules</b>	Generally used to deliver exploit code to a target system.
<b>Post modules</b>	Offer post-exploitation tools.
<b>Payload modules</b>	Used to create malicious payloads to use with an exploit.
<b>Encoder modules</b>	Used to ensure that payloads make it to their destination intact.

# Metasploit Commands

---


<code>msfconsole</code>	Launches MSFconsole from the command line.
<code>Show + module type</code>	Displays all the available modules. (For example: <code>show auxiliary</code> )
<code>Search + keyword</code>	Searches for modules based on a keyword.
<code>Use + module name</code>	Selects a specific module. (For example: <code>use scanner/ftp/anonymous</code> )
<code>info</code>	Displays the module details as well as the required and optional options.
<code>options</code>	Just displays the options available for the module.
<code>exploit OR run</code>	Runs the module.

# Questions?



# Activity: Metasploit

In this activity, you will exploit the vulnerable services that you discovered in your previous Nmap scan and obtain a reverse shell on the remote host by using an exploit module.

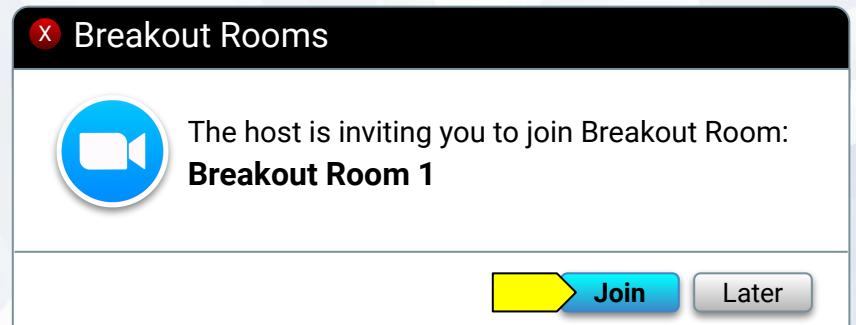

Suggested Time:

---

30 Minutes



Time's Up! Let's Review.

# Questions?



*Break*



# Phase 4: Post Exploitation



# Day 3 Recap

---

Let's recap what we've covered so far:

We introduced C2 frameworks and learned how penetration testers utilize their tools and features to conduct various aspects of penetration tests.



We then learned about a popular C2 framework called **Metasploit**, and how it can be used to:

- Search for potential exploits.
- Run the potential exploits.



Getting a shell on a machine is only the first part of having full control over the system.

The last activity you completed was part of the Exploitation phase.

Next, we'll focus on the **Post Exploitation** phase.



Planning and  
Reconnaissance

Scanning

Exploitation

Post Exploitation

Reporting

## Phase 4: Post Exploitation

Post Exploitation involves multiple steps, typically used to accomplish the following three tasks:

01

Enumeration and searching for useful data

02

Persistence

03

Privilege escalation

# Phase 4: Post Exploitation

01

## Enumeration and searching for useful data

Similar to the enumeration process during the Reconnaissance phase, except we are enumerating and searching for data from *inside* the target after it has been exploited.

This means we search for any useful information that's available from inside the target, including (but not limited to):

<b>Current user context</b>	(Name, groups, ID, etc.)
<b>List of users on the machine</b>	(Logged in and not)
<b>Current user access</b>	(Can they read the majority of files on the machine?)
<b>Identification of any defensive countermeasures</b>	(Antivirus, logging, endpoint detection & response solutions, etc.)

# Phase 4: Post Exploitation

02

## Persistence

The process of attempting to maintain long-term access to your target.

03


## Privilege escalation

~~The process of escalating privileges from a less privileged user to a more privileged user (or a low-privilege to high-privilege user).~~

# Privilege Escalation

When pen testing, it's common to land on a machine as a low- or no-privilege user. In this case, an important task for the penetration tester is to perform privilege escalation.

Much like the Reconnaissance phase is split between external and internal recon, the Post Exploitation phase is split between low-privilege post-exploitation tasks and high-privilege post-exploitation tasks.

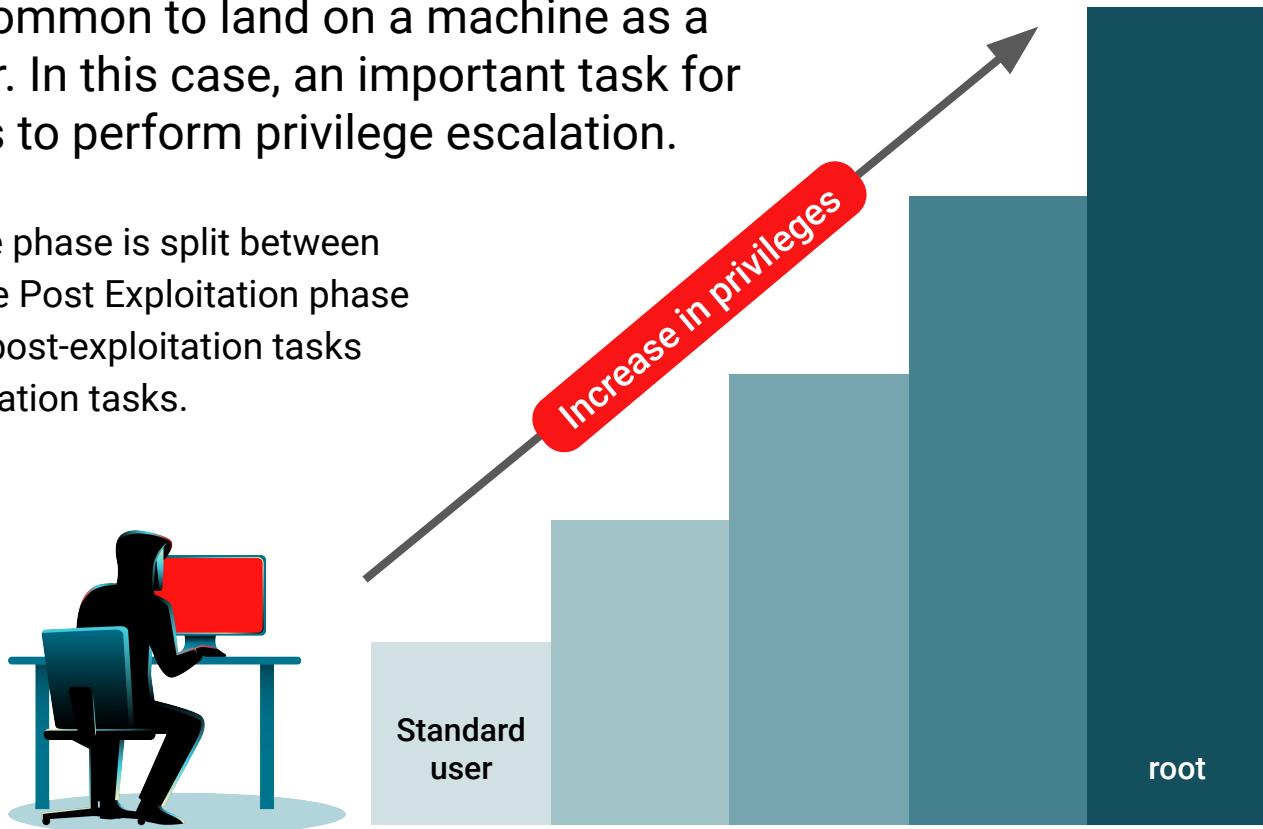

# High- and Low-Privilege Post-Exploitation Tasks

## Low-Privilege Tasks

Require minimal permissions and include:

- Gathering system/OS details.
- Gathering services and versions.
- Getting a list of users and groups.

## High-Privilege Tasks

Require sudo or root privileges and include:

- Reading sensitive files, such as `/etc/shadow` and SSH keys.
- Creating users and assigning them to privileged groups.
- Installing new services.
- The majority of persistence tasks.



The high-privilege user has more powerful capabilities, so it is important for a penetration tester to try and obtain these additional privileges.

# Tips for Successful Privilege Escalation

---

01

Utilize information gathered during enumeration.

02

Use the path of least resistance.

03

Exploit vulnerable software.

# Tips for Successful Privilege Escalation

---

01

Utilize information gathered during enumeration.

Gathering information allows us to identify a potential path to privilege escalation.

## **Common Linux paths of privilege escalation:**

- **Abusing current access**  
(E.g., sudo group, writable files, read access to sensitive files)
- **Exploitation of software**  
(Some services may run as a higher-privileged user.)
- **Utilizing weak passwords of privileged users**

# Tips for Successful Privilege Escalation

---

02

Use the path of least resistance.

Search for the easiest possible way to obtain your objective instead of jumping to a difficult task.

## For example:

- Some users keep passwords in a text file. Instead of hijacking a user's web browsing session and keylogging their strokes in an attempt to gather passwords, you can just find the text file.
- In addition to being easier, finding passwords in files or abusing functionality (e.g., scripts run as root but world-writable) is also stealthier, which is a key component of red teaming.

# Tips for Successful Privilege Escalation

---

03

Exploit vulnerable software.

Exploitation of vulnerable software is often suggested as a last step due to the nature of privilege-escalation techniques.

- Often, it involves abusing a service which has the potential to crash and bring down the machine.
- For this reason, finding as much information as possible on the machine during enumeration is key to help find any other possible privilege-escalation paths.

# MITRE <> Privilege Escalation

Privilege escalation has its own MITRE tactic.

The screenshot shows a web browser displaying the MITRE ATT&CK website at <https://attack.mitre.org/tactics/TA0004/>. The page title is "Privilege Escalation, Tactic TA0004". The navigation bar includes links for Matrices, Tactics, Techniques, Data Sources, Mitigations, Groups, Software, Resources, Blog, Contribute, and a Search bar. A banner at the top of the main content area reads: "ATT&CKcon 3.0 will be March 29, 30 2022 in McLean, VA! Submit to our CFP by 11/23 [here](#)". The left sidebar lists various tactics under the "Enterprise" category, with "Privilege Escalation" highlighted in red. The main content area has a heading "Privilege Escalation" and a subtext: "The adversary is trying to gain higher-level permissions." It describes how adversaries use techniques like SYSTEM/root level, local administrator, user account with admin-like access, and user accounts with specific system or function access. A sidebar on the right provides metadata: ID: TA0004, Created: 17 October 2018, Last Modified: 06 January 2021, and a link to "Version Permalink".

In the next activity, you will attempt to find a way to escalate your privileges from the daemon user to a higher-privileged user.

But first, everyone needs to be at the same starting point on the remote machine.

Please follow along with the demonstration to get set up for the next activity.





## Instructor Demonstration

---

## Post Exploitation Activity Setup



After the demo, leave the current window and Metasploit session open for the next activity.



# Activity: Privilege Escalation

In this activity, you will conduct post-exploitation tasks in order to attempt to gain privilege escalation.

Suggested Time:

---

20 Minutes

# Privilege Escalation Activity

---

While this task may have seemed trivial, it is *extremely* common.  
Other trivial Linux privilege-escalation methods include:




Being in the sudoers group.



Finding files that are run as root but writable by anyone (also known as **setuid**).



Finding passwords in configuration files (Apache and NGINX are common frameworks that have passwords in files).

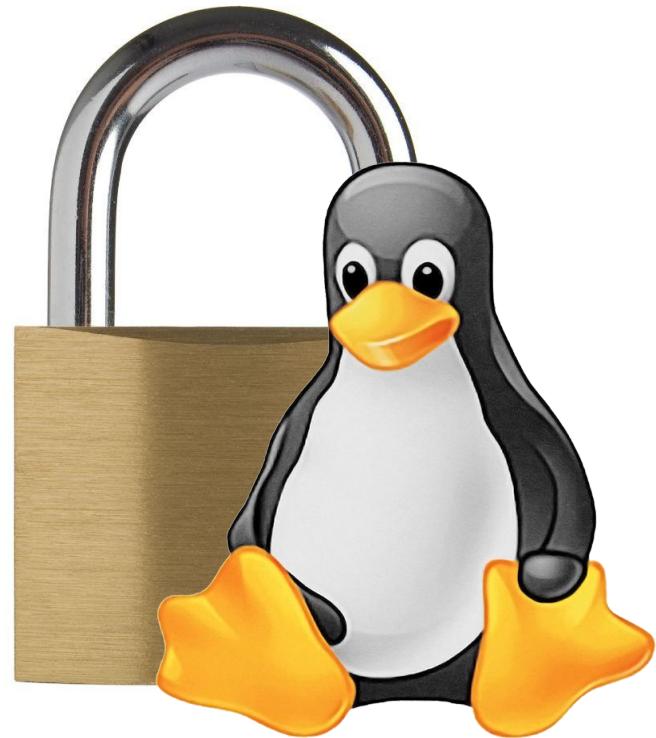

# Questions?



*The  
End*