| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| P1 | Making sketch for the prototype build plan | 2026-10-25 | AC |

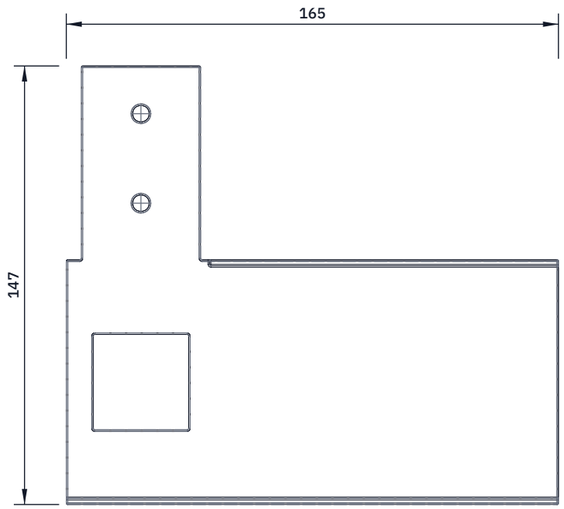


**TOP VIEW**

Scale 1:2; looking down (along -Z)

**FRONT VIEW**

Scale 1:2; looking at the front (along +Y)

**RIGHT VIEW**

Scale 1:2; looking at the right side (along -X)

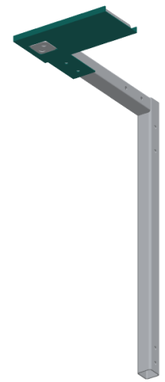

**WHERE IT GOES**

This part in colour, its neighbours in grey

**HOW TO MAKE IT AND HOW IT FITS**

Cut the flat blank from the tray blank picture: 165 x 98 mm with a 40 x 55 mm tab on one long edge, 5 mm from the charging end.
Fold lines 10 mm in from each long edge. On the tab side, cut the 10 mm strip away from the charging end to 48 mm (beside the tab).
Window for the camera bump: 32 x 32 mm, centred 25 mm from the charging end on the centre line. Measure your phone first: the window is the bump plus 2 mm all round, wherever the bump is.
Two 5.5 mm holes in the tab, on its centre line, 19 and 49 mm out from the fold line.
Fold both strips up 90 degrees in a vice between hardwood blocks: 78 mm inside between the lips for a 76 mm phone.
Fit: tab flat under the arm end; the phone lies screen up, its bump in the window. Check: the phone drops in and lifts out freely.

WASTEWISE-ML  github.com/BoujeeEnjinia1701/WasteWise-ml

# WasteWise-ml phone tray: making sketch

| DRAWING NO. | REV | SHEET | SIZE |
|---|---|---|---|
| WML-DWG-106 | P1 | 1 of 1 | ANSI B |

| SCALE | UNITS | PROJECTION | DATE | DRAWN |
|---|---|---|---|---|
| 1:2 | mm | | 2026-10-25 | Amish Chadha |

MATERIAL / NOTES

Aluminium sheet 2 mm, 5052 class (folds without cracking)

Licensed MIT · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand