



CONCEPT, NOT FOR FABRICATION

AirStreet · github.com/BoujeeEnjinia1701/airstreet

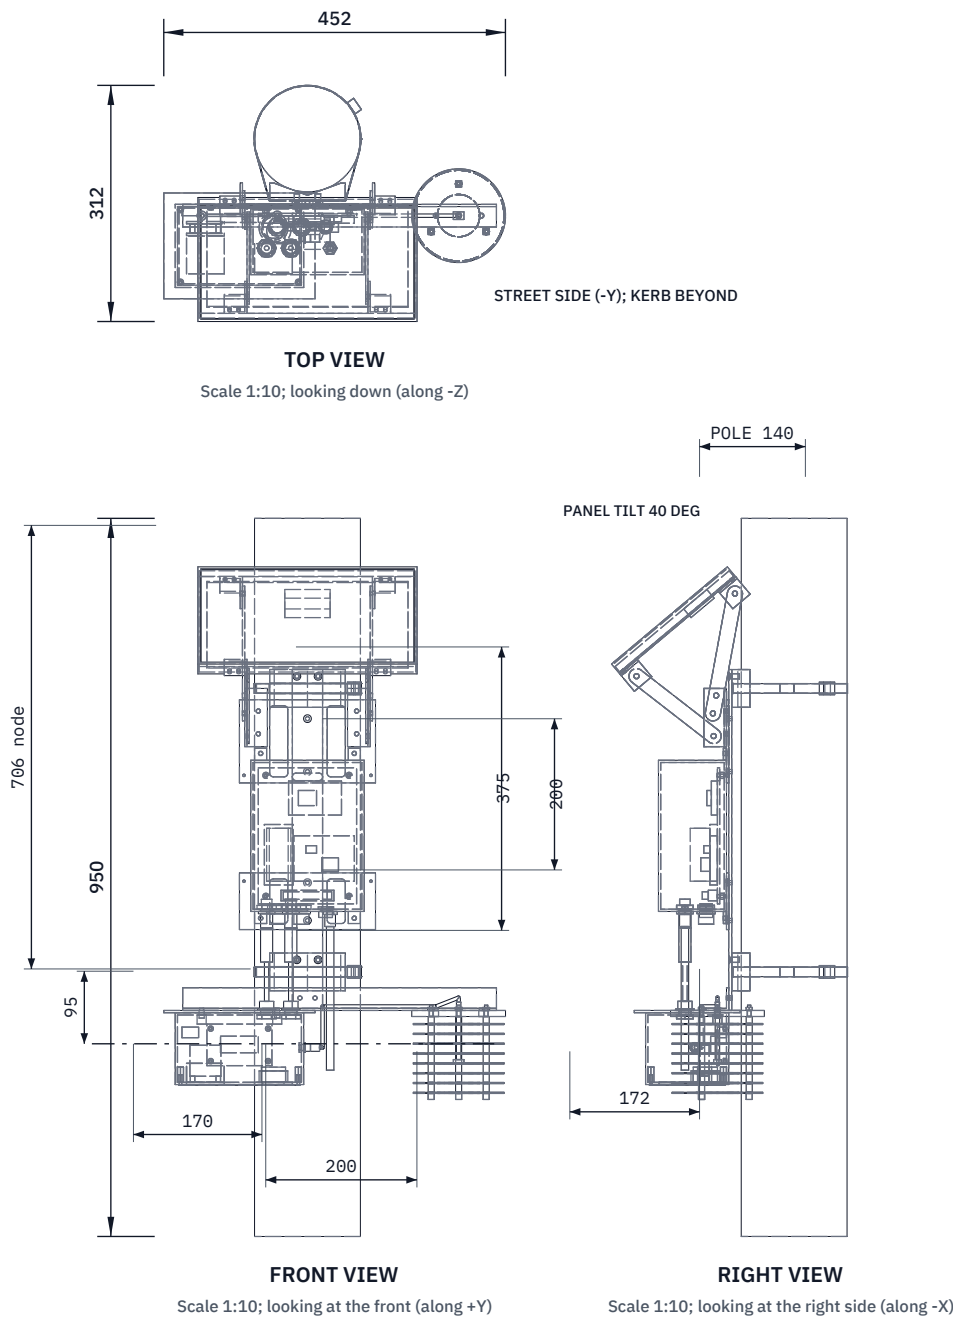

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	DDR-002: FieldNode back plate left off, adapter bars; notes	2026-09-25	AC
P3	Layout and labels tidied	2026-09-25	AC
P4	DDR-003: design for construction; saddles, plates, cross arm, pod	2026-09-30	AC
P5	DDR-003 A1 lightening: 40 x 4 rail, plate windows, 1.5 shield plates	2026-10-02	AC

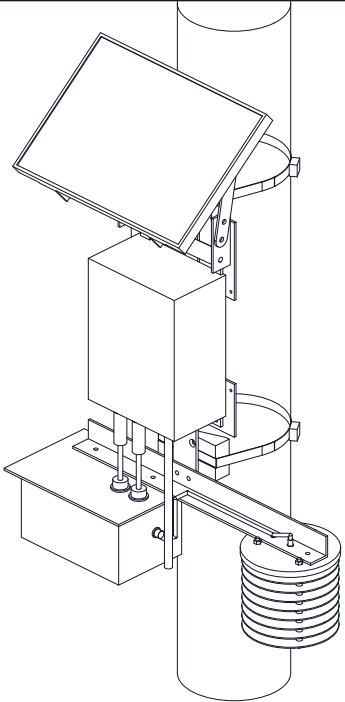

MAIN DIMENSIONS AND INTERFACES (MM)

Pole 80 to 200 OD (design 140); two 12.7 stainless bands 375 apart, 140 deg V-saddles
Rail 40 x 4 x 451; two 3 mm adapter plates with lightening windows carry the FieldNode lugs and bracket
Cross arm 30 x 30 x 3 angle, 415 long; pod and shield hang under it on screws
FieldNode core 150 x 90 x 200, underside 3,230; 6 W panel at 40 deg
Pod 170 x 110 x 95 behind mesh, drip lid +15; FieldNode whip 15 clear of the lid
Inlet plane 3,000 above sidewalk, chain line in front view (EU 1,500 to 4,000)
Shield 8 plates 120 OD x 1.5 at 13 pitch, 200 from pole axis, 172 from pole face; T and RH probe at 3,032
M12 port A (switched 5 V): SPS30 and SHT45; port B (5 V held on): NO2 front end
Mass 3.62 kg, 3.78 kg with sun shield (R13 limit 4.0 kg); frontal area 0.139 m² (AST-CAL-001 v0.6)
Third-angle; front view from the street (-Y); pole on the Z axis

AIRSTREET

github.com/BoujeeEnjinia1701/airstreet

General arrangement

DRAWING NO. AST-DWG-001			REV P5	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES FieldNode core per FND-BLD-001; parts per bom/bom.csv; making sketches AST-DWG-101 to 109. PRELIMINARY					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	