| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| P1 | Making sketch for the prototype build plan | 2026-09-30 | AC |

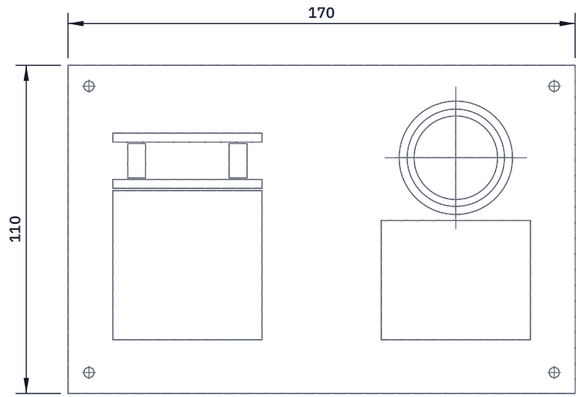


**TOP VIEW**

Scale 1:2; looking down (along -Z)

**FRONT VIEW**

Scale 1:2; looking at the front (along +Y)



**RIGHT VIEW**

Scale 1:2; looking at the right side (along -X)

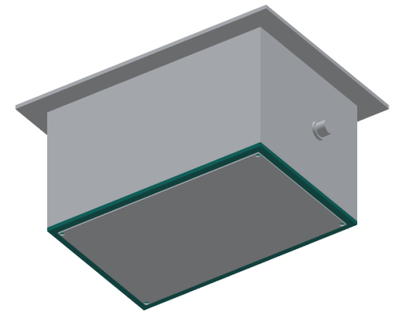

**WHERE IT GOES**

This part in colour, its neighbours in grey

**HOW TO MAKE IT AND HOW IT FITS**

Plate 170 x 110 x 3, printed flat with its features standing up.
Inlet slots: 50 x 50 centred 45 left and 12 forward of centre;
50 x 40 centred 45 right and 17 forward of centre.
PM sensor cradle, 45 left and 23 back of centre: two ribs 50 long,
3 thick, 25 tall, 12.5 apart inside; two pads 6 wide, 8 tall, 34
apart, between the ribs. The sensor stands on the pads, inlet down.
NO2 sensor: 28 mm window 45 right and 24 back of centre, inside a
collar 38 outside, 32.6 inside, 15 tall. The sensor sits face down.
Corner holes 3.4 mm, 78 each side and 48 forward and back of centre.
Mesh: cut stainless insect mesh 160 x 100; punch the four corner holes;
it goes under the floor, held by the four M3 screws.
Check: both sensors drop in without force; the floor sits flat.

AIRSTREET github.com/BoujeeEnjinia1701/airstreet

# AirStreet pod sensor floor: making sketch

| DRAWING NO. | REV | SHEET | SIZE |
|---|---|---|---|
| AST-DWG-107 | P1 | 1 of 1 | ANSI B |

| SCALE | UNITS | PROJECTION | DATE | DRAWN |
|---|---|---|---|---|
| 1:2 | mm | | 2026-09-30 | Amish Chadha |

MATERIAL / NOTES
ASA, 3D printed, 100 % infill

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand