



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

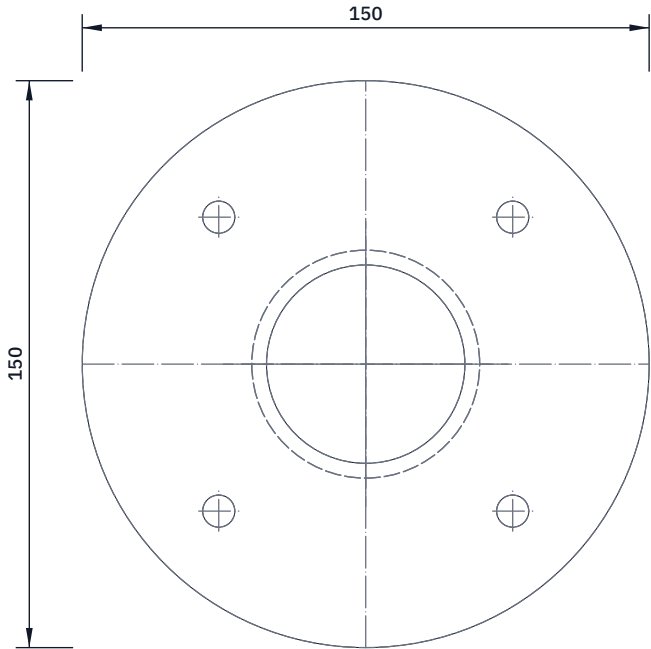


TOP VIEW

Scale 1:2; looking down (along -Z)

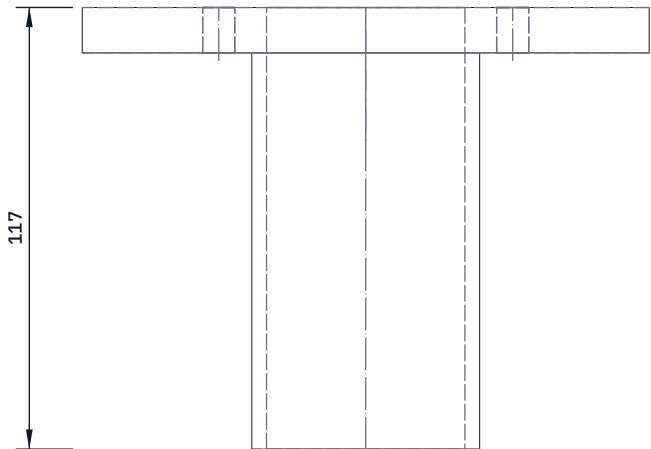


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

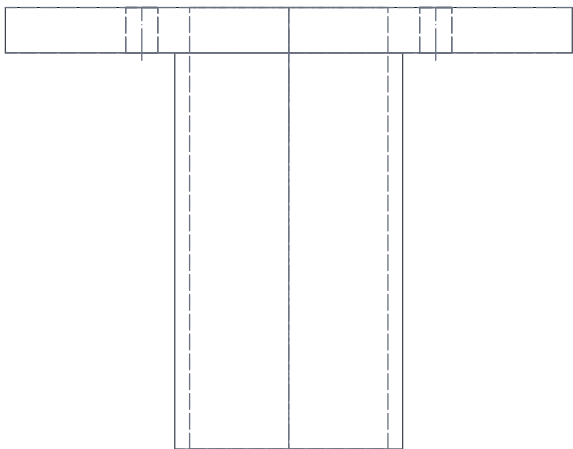

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

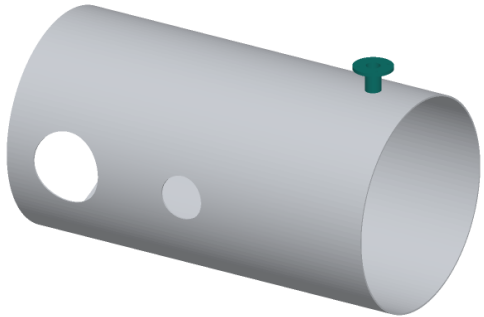

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Stub: cut 105 long from 2 in pipe, ends square
- Plate: 150 dia from 12 mm plate, bore 52.5 through the centre;
drill and tap 4 x M8 on a 110 circle
- Weld the plate on one end of the stub, flush with the bore
- Set the stub into the top hole (1300 from the door end);
plate top face 1302 above the floor, level
- Fillet weld to the shell all round outside, 5 mm leg
- Check: plate level within 1 deg; stub clear inside

AltIRig manifold stub and flange

DRAWING NO. ALR-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Pipe 60.3 x 3.91 (2 in sch 40) and 12 mm steel plate					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	