BUILD PLAN SKETCH, PLAN NOT YET BUILT

BankHaul · github.com/BoujeeEnjinia1701/bankhaul

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	BKH-DDR-003: stake 5.0 m long, driven 3.5 m (decision 14A)	2026-10-03	AC
P3	Kit 1.9 D3 model: four-plate point, welds	2026-10-25	AC

TOP VIEW

Scale 1:50; looking down (along -Z)

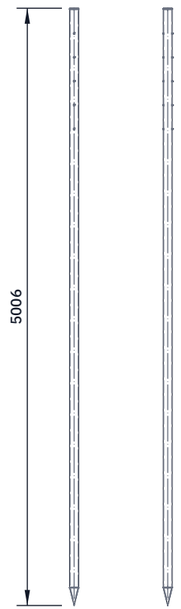

FRONT VIEW

Scale 1:50; looking at the front (along +Y)

RIGHT VIEW

Scale 1:50; looking at the right side (along -X)

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Tube 4,850 long; overall 5,000 with the point; 33 kg, two to lift
Point: four 4 mm plate triangles welded to a cone, 150 long
Cap disc 76 dia x 6 welded on the top; it takes every blow
Five 12.5 cross holes at 200 pitch, the top one 712 below the cap
Drill the holes square through both walls on one line
Mark a paint ring 3,500 above the point: drive to this ring at the bed
Paint after drilling; leave the bore open to drain
Check: straight within 10 over the length; the pin slides through every hole

BANKHAUL

github.com/BoujeeEnjinia1701/bankhaul

Far stake: making sketch

DRAWING NO.	REV	SHEET	SIZE
BKH-DWG-102	P3	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:50	mm		2026-10-03	Amish Chadha

MATERIAL / NOTES

76.1 x 3.6 tube, S355; 4 mm plate; 6 mm plate; zinc-rich paint

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand