

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW

Scale 1:2; looking down (along -Z)




FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

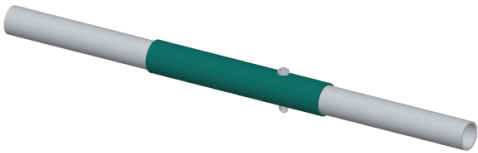

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two lengths of 300 from 50.8 x 3.2 fibreglass tube; seal the ends
Sand the bore with coarse paper on a dowel until the pole tube slides in
(about 0.2 clearance each side); try it often, do not overdo it
Drill one 10.5 hole across the sleeve, 75 from the middle (225 from one end)
Bond the other half (150) onto the top of the lower section with epoxy,
the hole end sticking up; wipe off squeeze-out; cure a full day
Then slide the upper section in, drill through its pin hole into line
Check: upper section slides in and out by hand; the pin goes through both

BREAKHOOK

github.com/BoujeeEnjinia1701/breakhook

Joint sleeve (make 2): making sketch

DRAWING NO. BHK-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Fibreglass tube 50.8 x 3.2, 300 long					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	