



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW
Scale 1:5; looking down (along -Z)

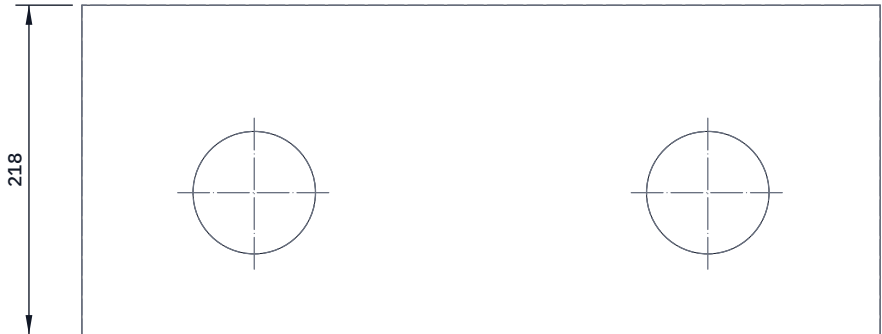

FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

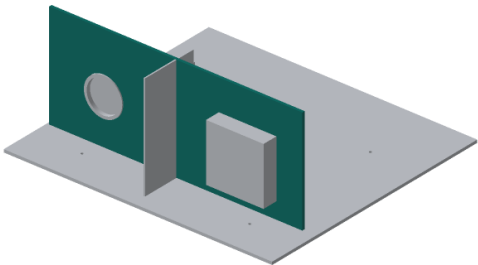

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

6 mm PVC foam board, 528 wide x 218 tall.
Two 81 holes for the fan inlets, centred 150 left and 150 right of centre, 94 up from the bottom edge.
Mark each fan's four mounting holes through the fan itself; drill 5 and fit rubber grommets so the fans do not drum on the board.
Fit: stands on the floor lining, its room-side face 94 from the outside of the room end (78 from the end lining), glued to the side linings. Drawn as seen from outdoors.
The supply fan (right) goes on the room side, its inlet through the hole; the exhaust fan (left) goes on the core side, its inlet through the hole facing the room. M4 nylon screws.
Check: each fan ring sits in its hole with about 0.5 mm all round.

BREATHEBOX

github.com/BoujeeEnjinia1701/breathebox

BreatheBox fan bulkhead: making sketch

DRAWING NO. BBX-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha	
MATERIAL / NOTES 6 mm PVC foam board					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	