



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

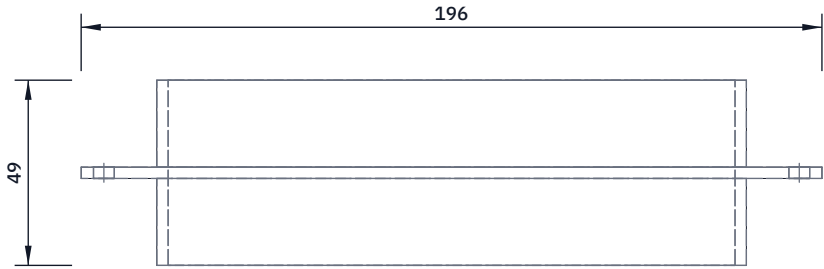


TOP VIEW

Scale 1:2; looking down (along -Z)

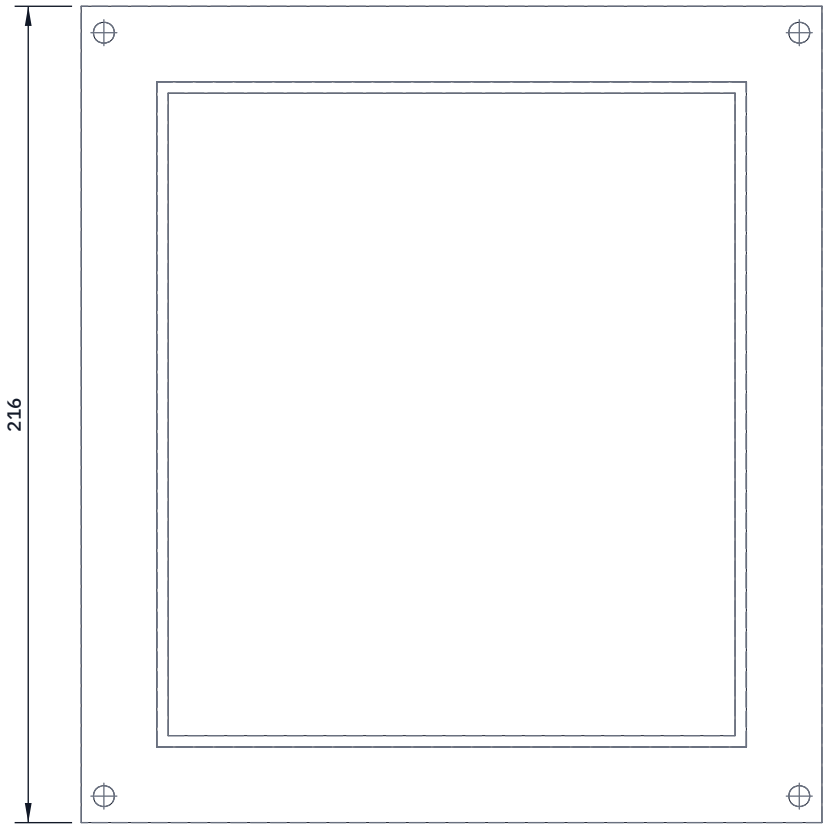


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

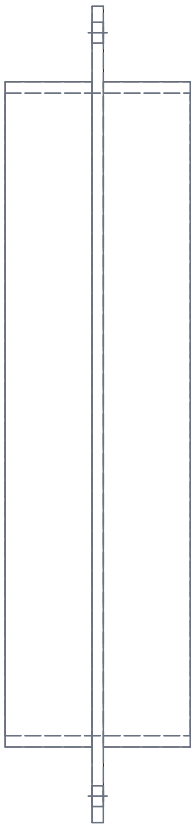

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

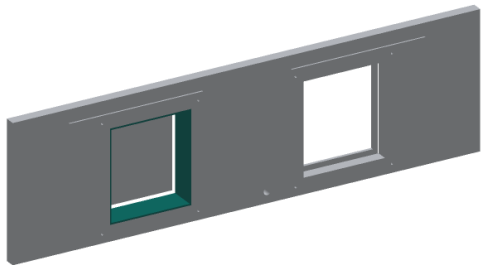

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

A rectangular tube, bore 150 x 170, from four strips of 3 mm PVC glued with PVC cement: two 49 x 156 and two 49 x 170.

49 is the design-case length: cut it so the collar reaches from the hood plate's outside face to the housing's end lining.

Flange: a 3 mm PVC frame 196 x 216 with a 156 x 176 hole, glued round the tube 23 from its outdoor end.

Four 5.5 holes in the flange, 6 in from the long edges and 7 in from the short edges (at its corners).

Fit: the outdoor end goes through the panel cut-out into the hood back plate; the flange lies on the panel's room face; four M5 bolts clamp flange, panel and hood plate. The room end slides 6 into the housing opening on 2 mm foam gasket.

Check: bore square; flange flat on the panel.

BREATHEBOX

github.com/BoujeeEnjinia1701/breathebox

BreatheBox collar (make 2): making sketch

DRAWING NO. BBX-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES 3 mm rigid PVC sheet					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand