




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

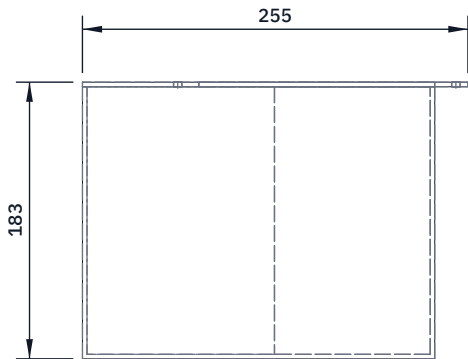


TOP VIEW
Scale 1:5; looking down (along -Z)

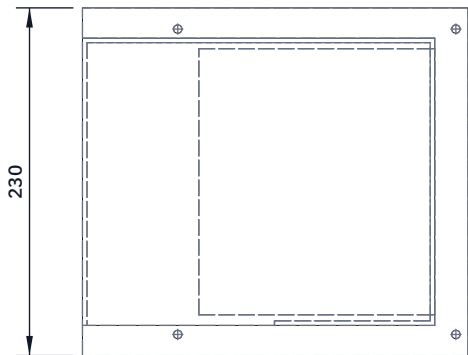

FRONT VIEW
Scale 1:5; looking at the front (along +Y)

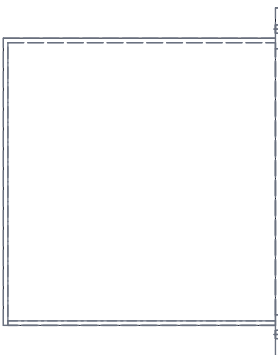

RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

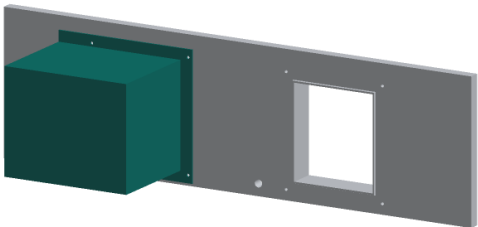

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Back plate: 3 mm PVC, 255 wide x 230 tall, with a 156 x 176 hole for the collar and four 5.5 holes matching the collar flange.

Hood box from 3 mm PVC, glued to the plate's outer face: top 180 x 233, two sides 180 x 187, outer end 233 x 187; open at the back (onto the plate) and at the bottom over the outer 124 mm of its width (the mouth); the inner 106 mm of the bottom is closed.

Mesh: 1 mm stainless mesh over the mouth, held by 10 mm PVC strips glued inside the mouth edges.

The two hoods are mirror images; mouths face down and point outward, 420 apart.

Fit: the collar glues into the plate's hole; the plate is bolted through the panel with the collar flange behind it.

Check: water poured on the top runs off, none enters the mouth.

BREATHEBOX

github.com/BoujeeEnjinia1701/breathebox

BreatheBox hood with back plate (make 2): making sketch

DRAWING NO. BBX-DWG-110			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha	
MATERIAL / NOTES 3 mm rigid PVC sheet; 1 mm stainless mesh					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	