




| REV | DESCRIPTION                                | DATE       | BY |
|-----|--------------------------------------------|------------|----|
| P1  | Making sketch for the prototype build plan | 2026-10-01 | AC |

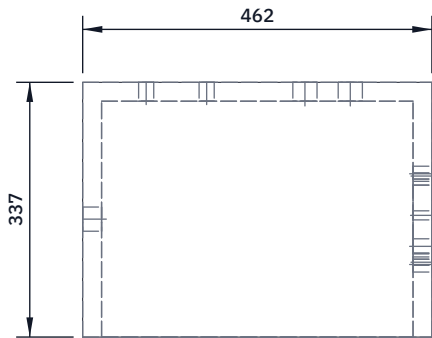


TOP VIEW  
Scale 1:10; looking down (along -Z)

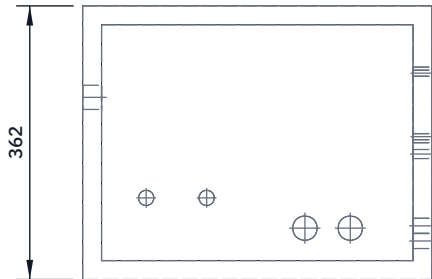

FRONT VIEW  
Scale 1:10; looking at the front (along +Y)



RIGHT VIEW  
Scale 1:10; looking at the right side (along -X)

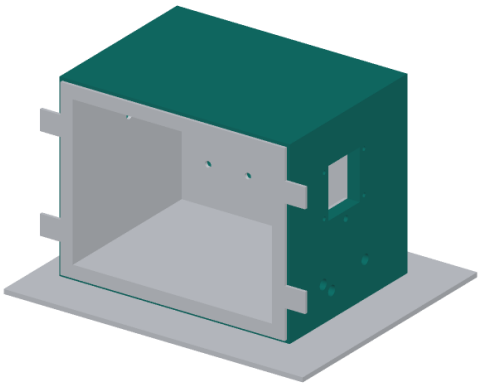

WHERE IT GOES  
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut five panels from 25 mm XPS with a fine saw or hot wire:

bottom and top 462 x 337; back 412 x 312;

left and right 337 x 312 (337 front to back).

Right panel: Peltier cut-out 90 wide x 100 tall; three 20 mm port holes, a 12 mm drain hole and four 8 mm sleeve holes, all lined up with the shell holes (wall holes picture).

Left panel: 32 mm hole for the aerosol port.

Back panel: two 20 mm HEPA holes and two 32 mm gland holes.

Fit: each panel lies flat on the shell, glued with foam-safe adhesive (never solvent cement, which melts XPS); tape every seam with foil tape. Front edges flush with the shell.

Check: no gap wider than 1 mm at any seam.

|                                                                    |             |                                                                                                     |                                             |                 |                       |
|--------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------------------------|---------------------------------------------|-----------------|-----------------------|
| CALRIG                                                             |             |                                                                                                     | github.com/BoujeeEnjinia1701/calrig         |                 |                       |
| CalRig insulation jacket (five panels): making sketch              |             |                                                                                                     |                                             |                 |                       |
| DRAWING NO.<br>CLR-DWG-102                                         |             |                                                                                                     | REV<br>P1                                   | SHEET<br>1 of 1 | SIZE<br>ANSI B        |
| SCALE<br>1:10                                                      | UNITS<br>mm | PROJECTION<br> | DATE<br>2026-10-01                          |                 | DRAWN<br>Amish Chadha |
| MATERIAL / NOTES<br>Extruded polystyrene (XPS) board 25 mm         |             |                                                                                                     |                                             |                 |                       |
| Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com |             |                                                                                                     | Generated from cad/src; do not edit by hand |                 |                       |