


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:1; looking down (along -Z)

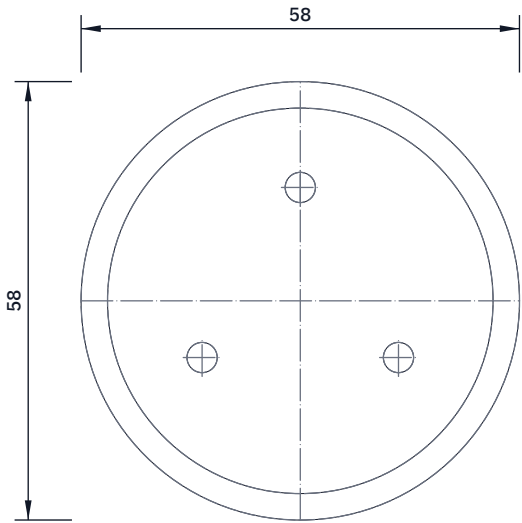


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

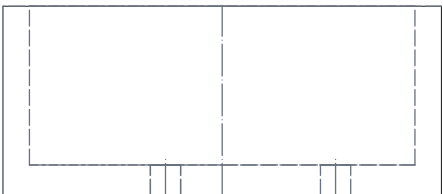

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

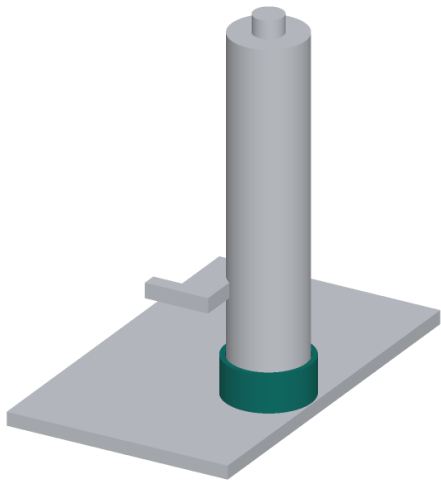

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print a cup 58 outside diameter and 25 tall, with a 51 bore and a 4 mm floor.

Three 4 mm holes in the floor, on a 30 mm circle, for wood screws into the base plate.

Fit: screw it to the base where the base layout shows. The 50 mm dryer column drops in with 0.5 clearance and stands on the floor; it lifts out for the gel to be dried in an oven.

Check: the column stands upright and lifts out by hand.

CALRIG

github.com/BoujeeEnjinia1701/calrig

CalRig dryer socket: making sketch

DRAWING NO. CLR-DWG-108		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	