
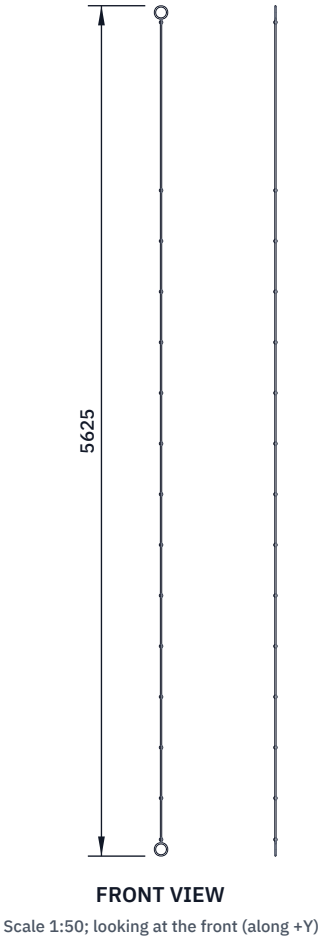


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 7.9 m; tape, cut and heat seal both ends.

Top loop: figure-eight on a bight with a 60 tail, loop about 80 long (fits the 10 mm screw link).

From the loop's knot measure 1,106 down: mark rung 1. Then mark every 335 for rungs 2 to 13 (12 more marks). Mark both ropes side by side so the marks match.

At each mark: overhand stopper knot, its top at the mark, tied when the rung is threaded (build step 11).

Below rung 13: 280 to a figure-eight loop for the bottom link.

Dress and set every knot by hand before loading.

CANALRUNG		github.com/BoujeeEnjinia1701/canalrung	
Side rope: making sketch (make 2)			
DRAWING NO. CNR-DWG-109		REV P1	SHEET 1 of 1
SCALE 1:50		UNITS mm	SIZE ANSI B
PROJECTION 		DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES 9 mm EN 1891 type B low-stretch kernmantle, polyester preferred			
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com		Generated from cad/src; do not edit by hand	