




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

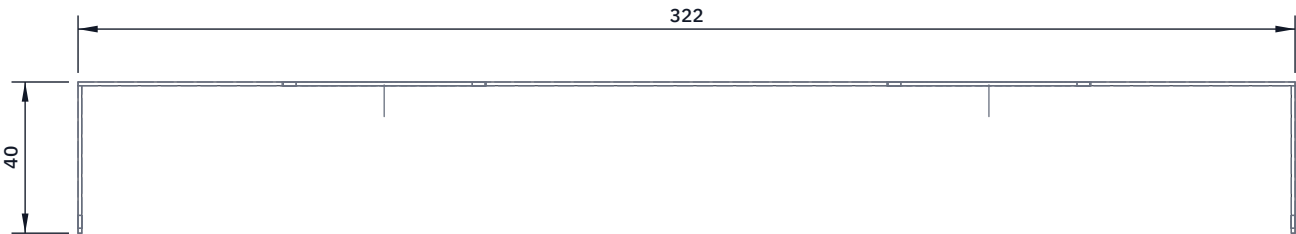


TOP VIEW
Scale 1:2; looking down (along -Z)

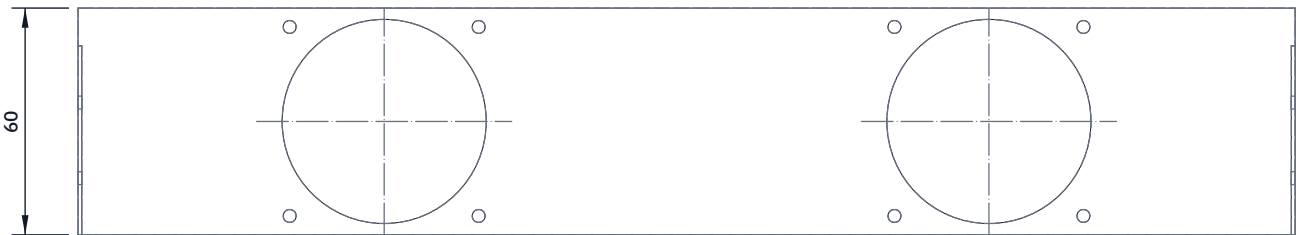

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

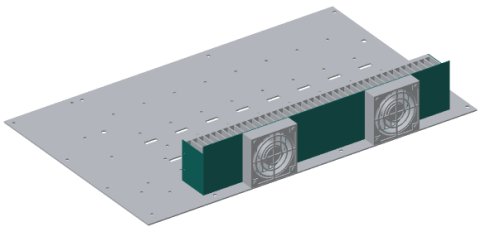

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

One blank 322 x 60 mm back with a 39 x 50 mm flange on each end.

Two 54 mm fan holes, centred 30 mm up, 81 mm and 241 mm from the left end of the back; cut with a hole saw or step drill.

Fan screw holes 3.4 mm on a 50 mm square round each fan hole.

Fold each end flange 90 degrees forward, square to the back.

Two 3.4 mm holes in each flange, 3 mm from the free end (in line with the spine), 15 and 35 mm up from the bottom edge.

Fit the fans to the back first, screws from the inside; each fan gets a 60 mm finger guard on its outer face (four small screws).

Fit: the flanges lie on the spine ends; the back stands 3 mm behind the fins; the bottom edge rests on the plate.

Check: the flange holes line up with the tapped holes in the spine.

CELLCHECK

github.com/BoujeeEnjinia1701/cellcheck

CellCheck fan shroud: making sketch

DRAWING NO. CCK-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 1 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	