


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:1; looking down (along -Z)

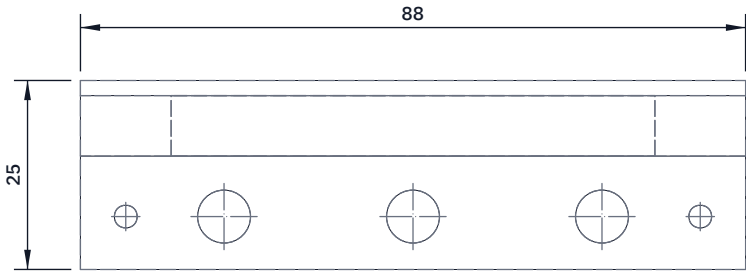


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

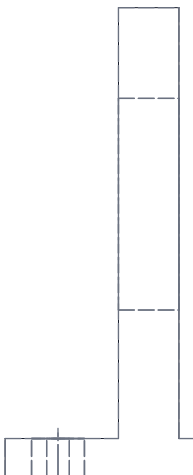

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

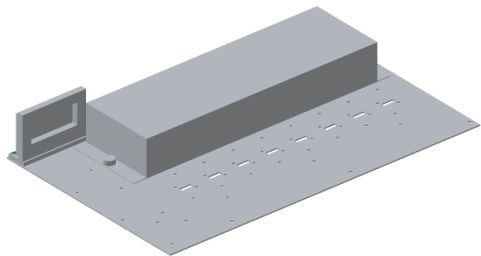

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print: a foot 88 x 25 x 5 mm and an upright 88 x 8 x 62 mm, 15 mm back from the foot's front edge, printed lying on its back.
Window 64 x 28 mm in the upright, 22 mm up, for the display's pins.
Two 3 mm pilot holes in the foot, 6 mm in from each end and 7 mm from the front, for M3 screws from under the plate.
Three 7 mm holes in the foot's front strip, 25 mm apart, for the panel-mount push buttons, held by their nuts.
Fit: the display module screws to the upright's front face with its four corner holes (M2.5 or M3 self-tappers).
Check: the 86 x 50 mm display board sits flat on the upright.

CELLCHECK

github.com/BoujeeEnjinia1701/cellcheck

CellCheck display stand: making sketch

DRAWING NO. CCK-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed, 40 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	