



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC
P2	Status light and light pipe added (CGD-DEC-001)	2026-10-02	AC

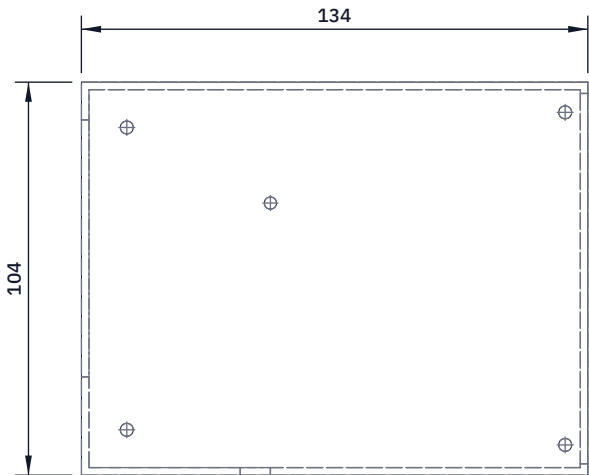


TOP VIEW

Scale 1:2; looking down (along -Z)




FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

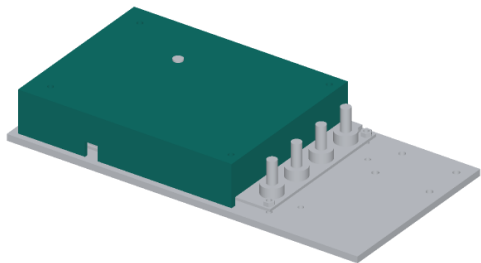

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print upside down (top face on the bed), 2 mm walls, 100 % infill, in flame-retardant polycarbonate in an enclosed printer.

Outside 134 x 104 x 26.1 mm, open at the bottom.

Four 3.4 mm holes in the top over the pillars: 12 mm from the signal end 40 each side, and 128 mm from it 44 each side.

Signal-end notch 68 wide, from 26 below to 42 above the centre line, open at the bottom, 15.1 mm tall: the connectors and harness sit in it. Power-end notch 98 wide, 5.1 mm tall, open at the bottom: the board passes under it with 1 mm clear.

Probe notch 8 wide, 9.1 mm tall, in the near side wall.

Light pipe hole 3.2 mm in the top, 50 mm from the signal end, 20 to the B+ side: press the flanged 3 mm light pipe in from above; its foot stops 0.5 mm over the status light.

Fit: it rests on the four pillars only; its walls stand 0.5 mm clear of the plate. Four M3 x 6 pan-head screws.

Check: on the pillars it does not rock and touches no part.

CELLGUARD

github.com/BoujeeEnjinia1701/cellguard

CellGuard cover: making sketch

DRAWING NO. CGD-DWG-104			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Flame-retardant polycarbonate, opaque, printed, 2 mm wall					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand