


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

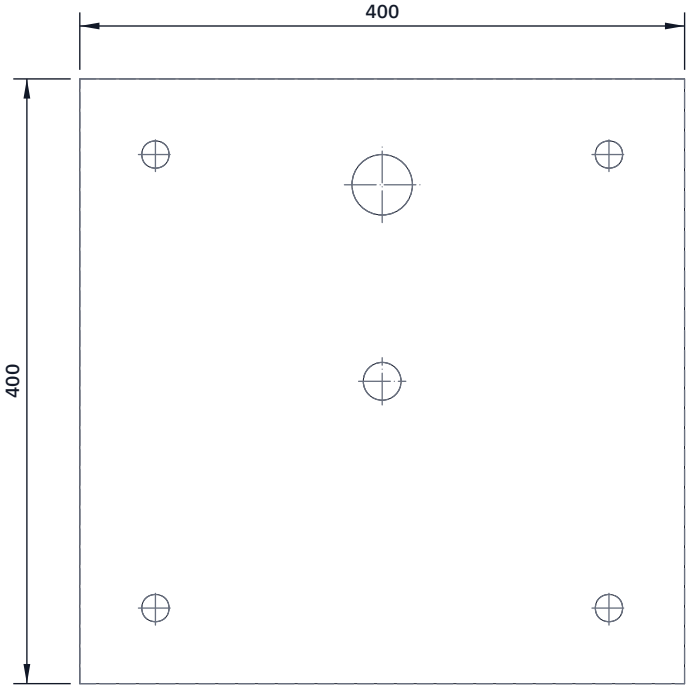


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

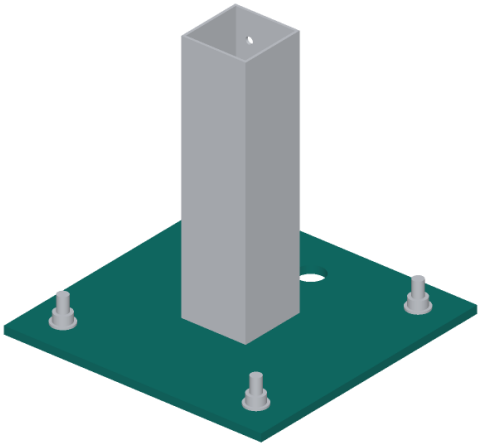

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Blank 400 x 400 mm, 12 mm steel; corners rounded about 10 mm.

Positions from the plate center; the post sits on the center.

Four anchor holes 18 mm on a 300 mm square (150 each way).

Vent and drain hole 25 mm at the center, under the post:

the galvanizer needs it, and it lets condensation out.

Conduit hole 40 mm on the center line, 130 mm toward the back

(the cabinet side), clear of the post by 64 mm.

Weld: post square on the plate, 4 mm fillet all round,

before galvanizing (one weldment with the post).

Deburr every hole; grind weld spatter off the top face.

Check: the post stands square to the plate within 1 mm

over its height; anchor holes 300 mm apart both ways.

CityTwin base plate: making sketch

DRAWING NO. CTW-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel plate 12 mm, S275 or S355 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					
Generated from cad/src; do not edit by hand					