


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

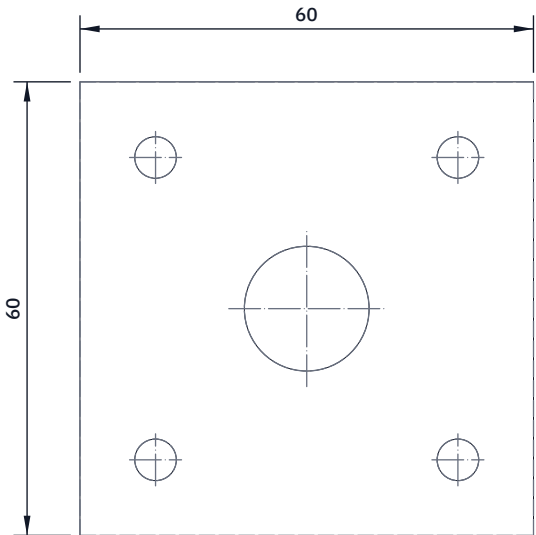


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

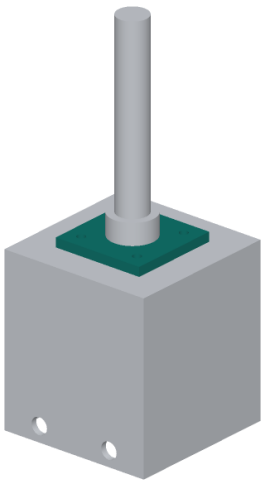

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Plate 60 x 60 mm, 6 mm, corners rounded 3 mm.
Center hole 16.5 mm for the antenna's N-type bulkhead.
Four 5.5 mm holes at 20 mm each way from center, matching the M5 tapped holes in the post cap.
Fit: on the cap with four M5 screws and a bead of sealant; the bulkhead passes through the plate and the cap's 20 mm hole, nut underneath, coax down the post.
Check: the antenna stands vertical within 2 degrees.

CITYTWIN

github.com/BoujeeEnjinia1701/citytwin

CityTwin antenna bracket: making sketch

DRAWING NO. CTW-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminum plate 6 mm, 6082 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		