




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

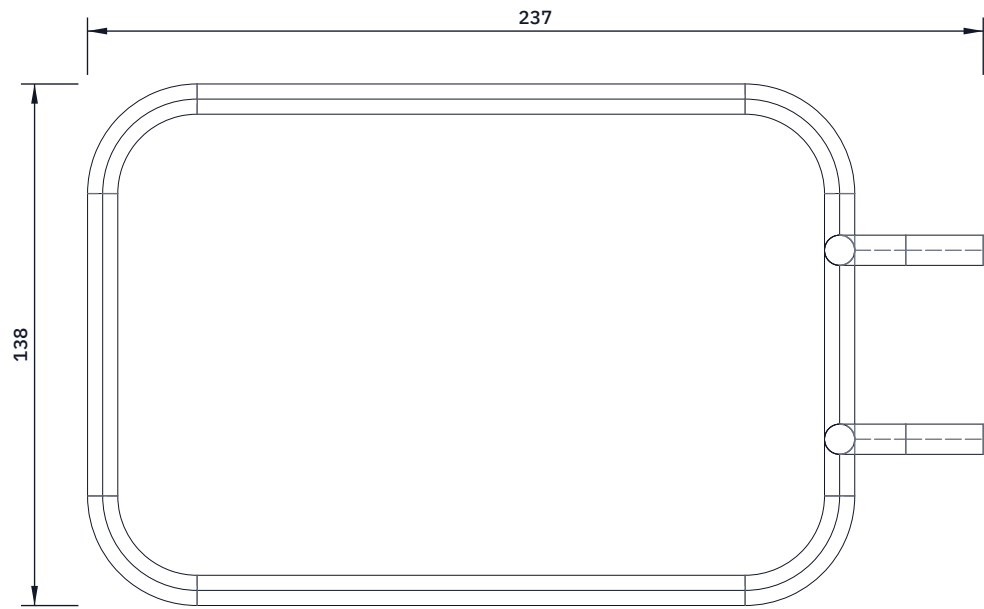


TOP VIEW
Scale 1:2; looking down (along -Z)

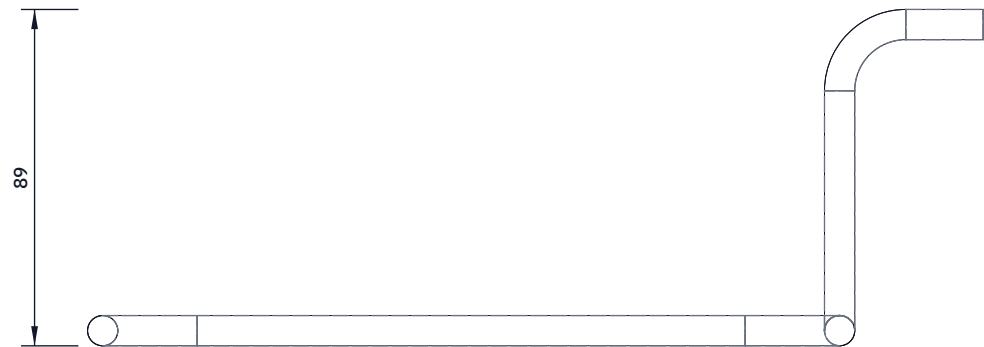

FRONT VIEW
Scale 1:2; looking at the front (along +Y)

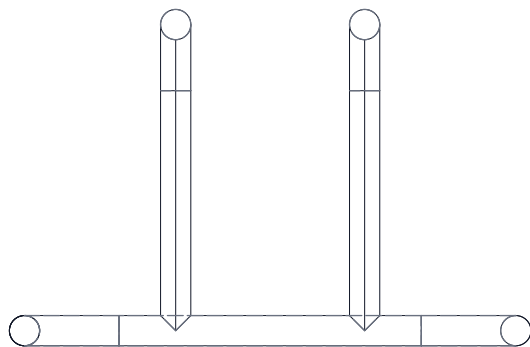

RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

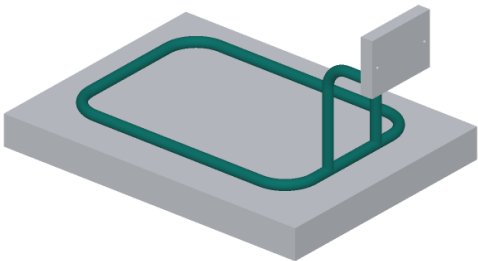

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Evaporator ring: a closed rectangle 195 x 130 mm on the tube centre line, corners bent to 25 mm radius, ends joined with a coupler, brazed.

Two tees in the cooling-end run, 25 mm each side of the centre.

Risers: from each tee straight up 63.5 mm, then a 90 degree bend of 17.5 mm radius (lever bender for 8 mm tube) toward the cooling end; the tail ends 33 mm beyond the outside of the can.

Braze with silver alloy, nitrogen purge; clean and cap the open ends.

Fit: the ring lies in the bottom inside corner of the can, touching floor and wall, bonded with thermally conductive epoxy; the risers drop down the can's open slots; the tails go into the cold block.

A refrigeration technician leak tests, evacuates and charges the loop.

Check: the ring lies flat on a table within 1 mm.

COLDPOD			github.com/BoujeeEnjinia1701/coldpod		
ColdPod loop thermosiphon: bending sketch					
DRAWING NO. CPD-DWG-103		REV P1	SHEET 1 of 1		SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Soft copper refrigeration tube 8 x 0.5 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		