


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

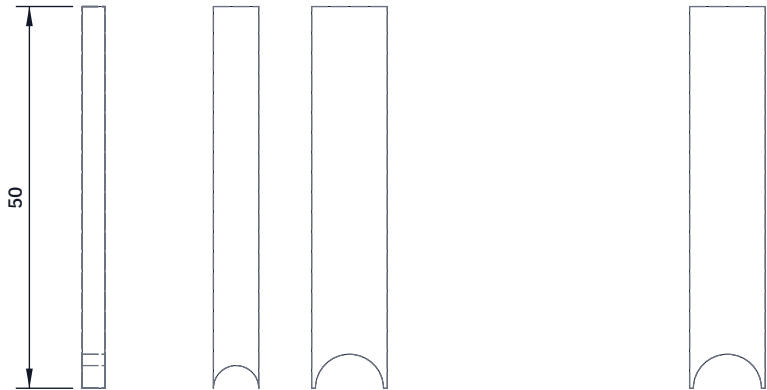


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

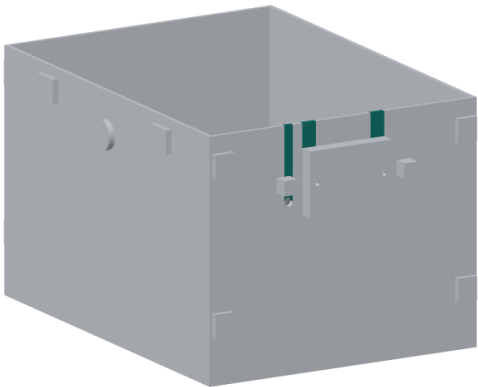

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Two pipe fillers 3 x 10 mm and one cable filler 3 x 6 mm, each 50.5 tall, with a half-round notch at the bottom: 9 mm across for the pipes, 6 mm for the cable.

Print lying flat.

Fit: slide each filler down its shell slot onto the pipe or cable after the foam strip and the upper VIP end panel are in. Glue the sides with a bead of silicone; the outer face is flush with the shell.

Check: flush within 0.3 mm, so the cold block sits flat on it.

COLDPOD

github.com/BoujeeEnjinia1701/coldpod

ColdPod slot fillers (make 3): making sketch

DRAWING NO. CPD-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed, 100 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand