


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW

Scale 1:10; looking down (along -Z)




FRONT VIEW

Scale 1:10; looking at the front (along +Y)

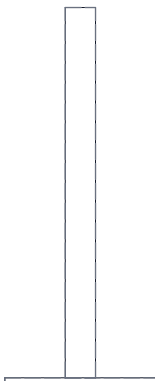

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

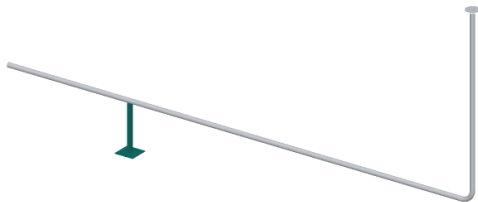

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Base plate 6 mm, 200 x 200 mm, two 28 mm stake holes.
- Post SHS 40 x 40 x 3 welded in the middle, square.
- Low stands (2): post 490 mm, pipe centre 520 mm up.
- Tall stand (1): post 1,800 mm, beside the riser.
- U-bolt for the 48 mm pipe near the top of each post.
- Stake each base with two 25 mm stakes.
- Check: the pipe falls gently to the riser so water drains away from the engine.

COLLARDRIVE

github.com/BoujeeEnjinia1701/collardrive

CollarDrive exhaust stand: making sketch

DRAWING NO. CLD-DWG-123			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES SHS 40 x 40 x 3 and 6 mm plate, S275; two low, one tall					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand