



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

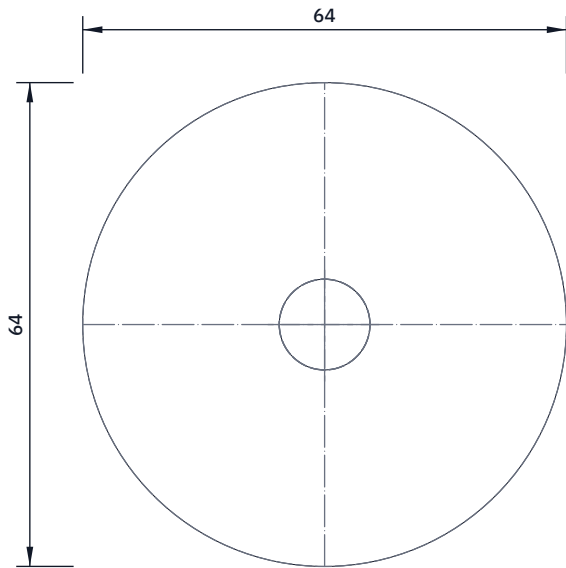


TOP VIEW

Scale 1:1; looking down (along -Z)

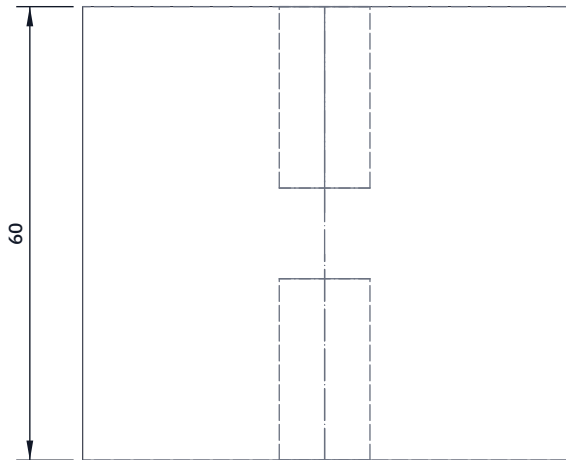


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

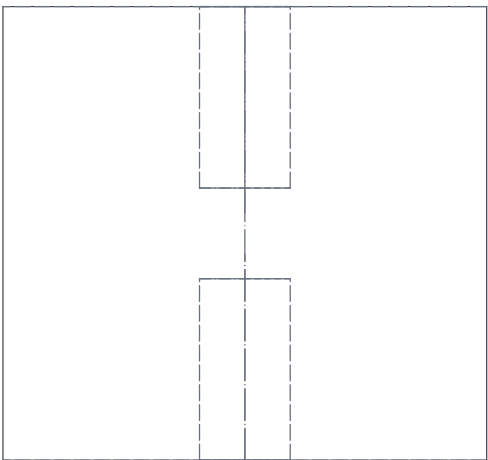

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

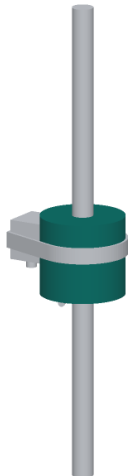

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Turn to 64 mm diameter x 60 mm long; face both ends square and parallel within 0.1 mm. Chamfer the outer edges 1 mm.

Both end faces: centre drill, drill 10.2 mm 27 mm deep and tap M12 x 1.75 to 24 mm deep. The two holes do not meet.

The top face takes every hammer blow: leave it flat and smooth.

Fit: the lower rod's top stud screws into the bottom hole and the upper rod's stud into the top hole, each to its shoulder, with medium thread locker. The clamp collar butts the bottom face; the sensor pad and band clamp onto its side.

Check: both rods seat on their shoulders with no rock; the anvil spins true on the rod within 0.2 mm.

CONEPRO

github.com/BoujeeEnjinia1701/conepro

ConePro anvil: making sketch

DRAWING NO. CNP-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Steel round bar 70 mm, 1045 or 4140 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	