BUILD PLAN SKETCH, PLAN NOT YET BUILT

CoolShade · github.com/BoujeeEnjinia1701/coolshade

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

TOP VIEW

Scale 1:5; looking down (along -Z)

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along

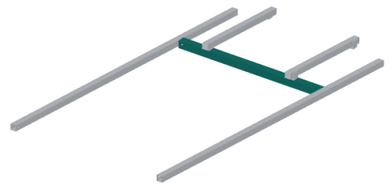

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make one, 1,020 mm long, ends square.
Front face: one 11 mm rivet nut hole 25 mm from each end, 18.5 mm below the top face (cleats).
Top face: two 11 mm rivet nut holes 205 and 815 mm from the left end, on the centre line (L-feet).
Fit: square across between the purlins' inner faces, its front face 1,685 mm behind the front beam's inner face (plan), level. The cloth's notch edge laces round it.
Check: it drops between the purlins with no more than 1 mm gap.

COOLSHADE

github.com/BoujeeEnjinia1701/coolshade

CoolShade panel bearer: making sketch

DRAWING NO.	REV	SHEET	SIZE
CSH-DWG-110	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-09-30	Amish Chadha

MATERIAL / NOTES

Galvanized steel SHS 50 x 50 x 2 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand