BUILD PLAN SKETCH, PLAN NOT YET BUILT

CurbCount · github.com/BoujeeEnjinia1701/curbcount

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

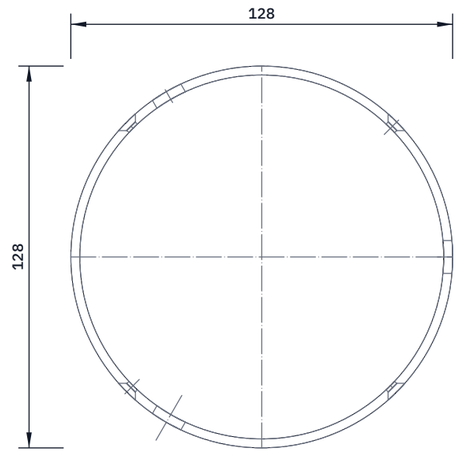

TOP VIEW

Scale 1:2; looking down (along -Z)

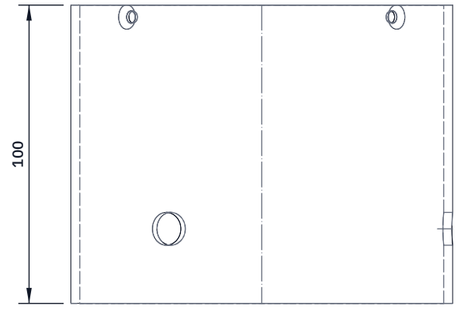

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

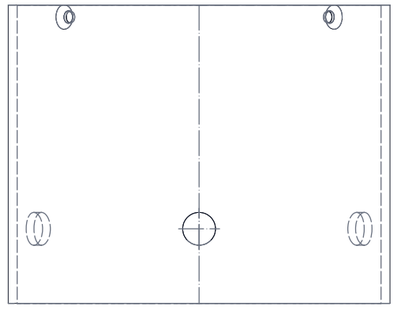

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 100 mm of round tube; square and deburr both ends.
The bore must be 122 mm or more so it slides over a 114 mm pole.
Top: four 4.5 mm holes 4 mm down from the top edge, at 45, 135,
225 and 315 degrees; countersink them for M4 screws.
Bottom: three 11 mm holes 25 mm up from the bottom edge, at 0, 120
and 240 degrees; set an M8 stainless rivet nut in each.
Put the hole at 0 degrees on the road side when fitting.
Fit: the cap disc goes inside the top, flush, on the four radial
screws; the sleeve then sits on the pole top through the disc.
Three M8 cup-point set screws in the rivet nuts centre it on the pole.
Check: it slides over a 114 mm tube with 3 to 4 mm all round.

CURBCOUNT

github.com/BoujeeEnjinia1701/curbcount

CurbCount sleeve: making sketch

DRAWING NO.	REV	SHEET	SIZE
CBC-DWG-109	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Aluminium round tube about 128 x 3 mm, bore 122 mm or more

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand