REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

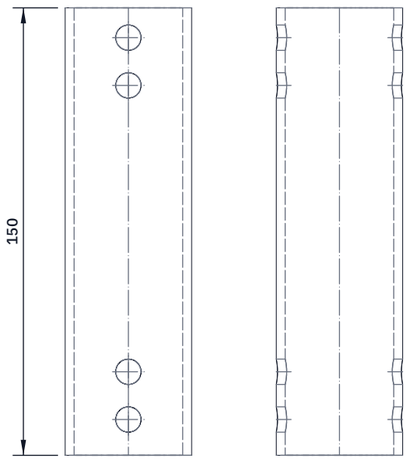

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 150 mm of 42.4 x 3.0 tube; square both ends and deburr.
Fit a plug in each end first (next sheet), then drill the post and plug together, straight across, 8.5 mm:
bottom end: 12 and 28 mm up from the bottom;
top end: 10 and 26 mm down from the top.
All four holes lie in one plane: drill in a V-block on a drill press.
Fit: the bottom end stands on the cap disc between the lower clips; the top end sits between the upper clips under the rail plate, 4 mm clear of it. Two M8 bolts through each end.
Check: a rod passes straight through each hole pair.

CURBCOUNT github.com/BoujeeEnjinia1701/curbcount

CurbCount post: making sketch

DRAWING NO.	REV	SHEET	SIZE
CBC-DWG-111	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES
Aluminium round tube 42.4 x 3.0 mm, 6063

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com Generated from cad/src; do not edit by hand