



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

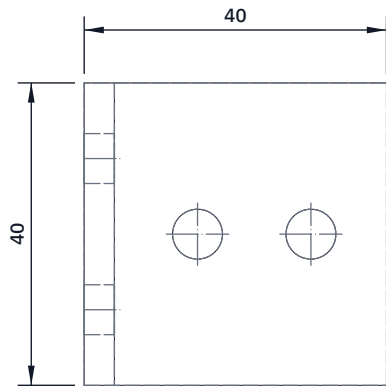


TOP VIEW

Scale 1:1; looking down (along -Z)

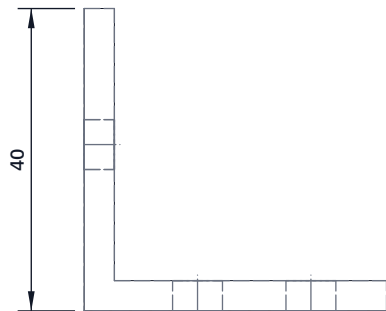


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

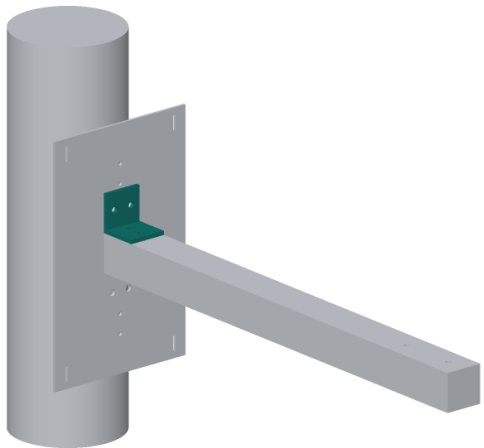

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two 40 mm lengths of 40 x 40 x 4 angle; square and deburr.

Upright leg (goes on the plate): two 6.6 mm holes 10 mm each side of the middle, 22 mm from the heel (the outside corner).

Flat leg (goes on the tube): two 6.6 mm holes on the middle line, 15 and 30 mm from the heel.

Both brackets are the same; one goes on top of the tube, the other underneath, upside down.

Fit: the upright leg on the plate's front, its heel at the tube's top (or bottom) face; M6 bolts through the plate, nuts behind.

Two M6 bolts go down through both brackets and the tube, each with a crush spacer inside the tube.

Check: the bracket sits flat on both the plate and the tube.

CURBCOUNT

github.com/BoujeeEnjinia1701/curbcount

CurbCount arm bracket (make 2): making sketch

DRAWING NO. CBC-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium equal angle 40 x 40 x 4 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	