



| REV | DESCRIPTION                                | DATE       | BY |
|-----|--------------------------------------------|------------|----|
| P1  | Making sketch for the prototype build plan | 2026-09-30 | AC |

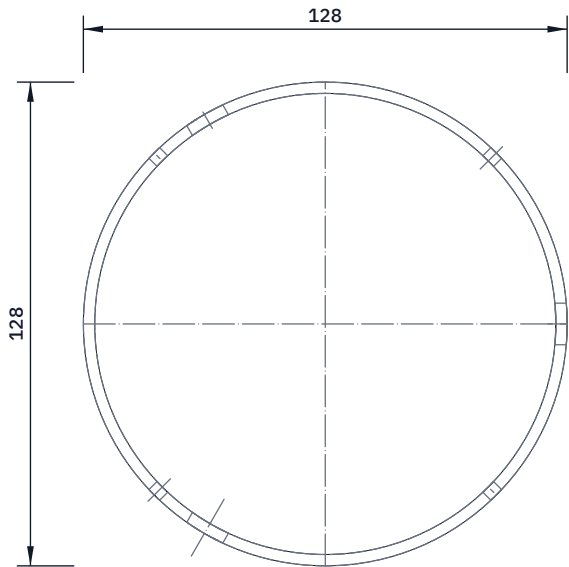


TOP VIEW

Scale 1:2; looking down (along -Z)

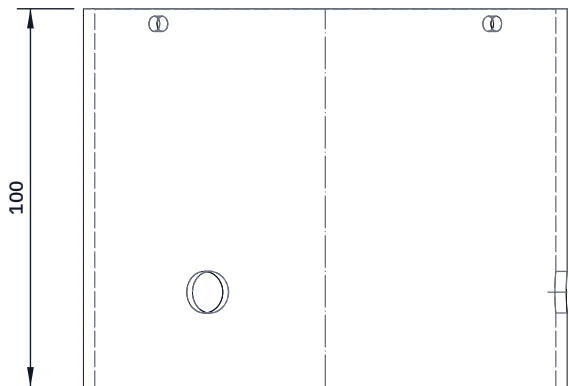


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

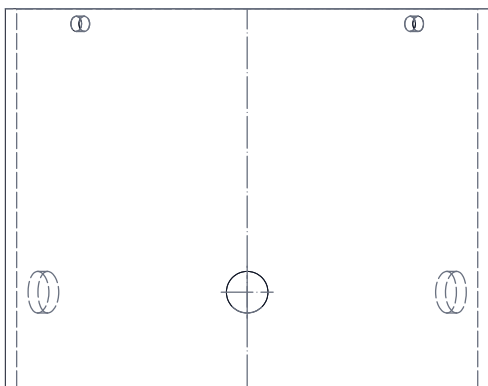

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

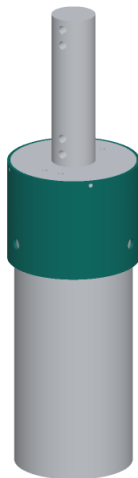

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 100 mm of round tube; square and deburr both ends.

The bore must be 122 mm or more so it slides over a 114 mm pole.

Top: four 4.5 mm holes 4 mm down from the top edge, at 45, 135, 225 and 315 degrees; countersink them for M4 screws.

Bottom: three 11 mm holes 25 mm up from the bottom edge, at 0, 120 and 240 degrees; set an M8 stainless rivet nut in each.

Put the hole at 0 degrees on the road side when fitting.

Fit: the cap disc goes inside the top, flush, on the four radial screws; the sleeve then sits on the pole top through the disc.

Three M8 cup-point set screws in the rivet nuts centre it on the pole.

Check: it slides over a 114 mm tube with 3 to 4 mm all round.

CURBCOUNT

[github.com/BoujeeEnjinia1701/curbcount](https://github.com/BoujeeEnjinia1701/curbcount)

CurbCount sleeve: making sketch

|                                                                                                             |                    |                                                                                                     |                           |                                             |                              |
|-------------------------------------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------------------------|---------------------------|---------------------------------------------|------------------------------|
| DRAWING NO.<br><b>CBC-DWG-109</b>                                                                           |                    |                                                                                                     | REV<br><b>P1</b>          | SHEET<br><b>1 of 1</b>                      | SIZE<br><b>ANSI B</b>        |
| SCALE<br><b>1:2</b>                                                                                         | UNITS<br><b>mm</b> | PROJECTION<br> | DATE<br><b>2026-09-30</b> |                                             | DRAWN<br><b>Amish Chadha</b> |
| MATERIAL / NOTES<br><b>Aluminium round tube about 128 x 3 mm, bore 122 mm or more</b>                       |                    |                                                                                                     |                           |                                             |                              |
| Licensed CERN-OHL-S-2.0 · Design Molecule Lab · <a href="https://designmolecule.com">designmolecule.com</a> |                    |                                                                                                     |                           | Generated from cad/src; do not edit by hand |                              |