

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

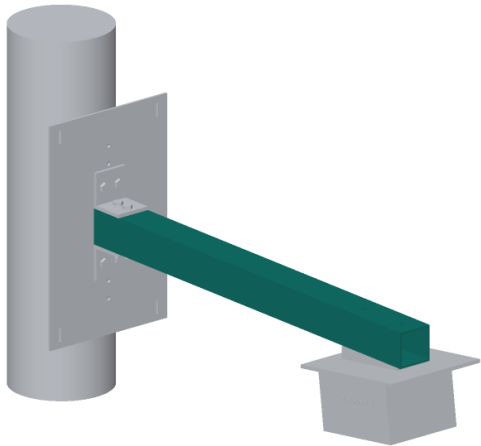

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 498 mm of 40 x 40 x 2 tube; square both ends (the pole end must sit flat on the plate) and deburr.

Plate end: two 6.6 mm holes straight through top and bottom walls, on the centre line, 15 and 30 mm from the end.

Head end: two 5.5 mm holes straight through, on the centre line, 418 and 478 mm from the plate end.

Drill each pair square through both walls (drill press, V-block).

Cut four crush spacers 36 mm long from 10 mm aluminium tube; they sit inside the tube on the bolts so the walls do not crush.

Fit a plastic end cap in the head end.

Check: on a flat bench the tube does not rock; holes line up top to bottom (a rod passes straight through).

CURBCOUNT

github.com/BoujeeEnjinia1701/curbcount

CurbCount arm tube: making sketch

DRAWING NO. CBC-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium square tube 40 x 40 x 2 mm, 6063					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	