BUILD PLAN SKETCH, PLAN NOT YET BUILT

DewDrive · github.com/BoujeeEnjinia1701/dewdrive

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

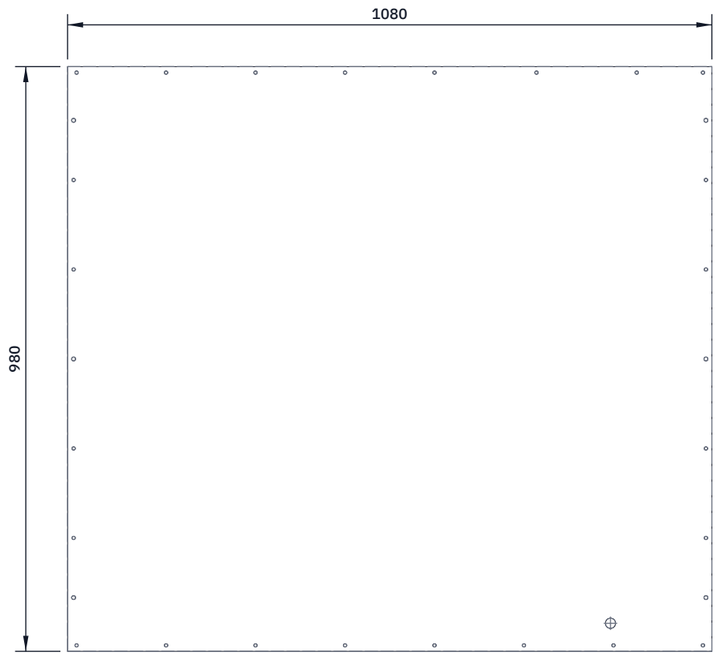

TOP VIEW

Scale 1:10; looking down (along -Z)

FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

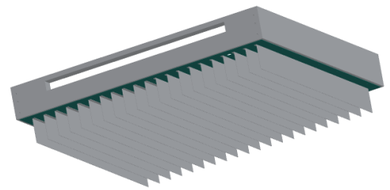

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Blank 1,080 x 980 x 2 mm. Top face (the wetted face) up in the views.
Holes along all four edges, 10 mm in from the edge, for the M5
screws up into the wall bottom battens: 5.5 mm. Positions are in
the hole layout picture (plate holes) of the build plan.
Three 6.5 mm holes along each east and west edge, 10 mm in, at 90,
490 and 890 from the south edge: the box to stand bolts.
Drain hole 17 mm, 910 from the west edge and 47 from the south edge.
Deburr all holes. Coat the top face with a food-safe coating after
the fins are fixed (rivet heads included).
Fit: the walls stand on the top face on EPDM gasket tape; the plate
edge is 10 mm inside the walls' outer faces all round. The stand
rails run under the east and west edges.
Check: flat within 2 mm over its length.

DEWDRIVE

github.com/BoujeeEnjinia1701/dewdrive

DewDrive condenser plate: making sketch

DRAWING NO.	REV	SHEET	SIZE
DWD-DWG-103	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

Aluminium sheet 2 mm, 5052 class

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand