BUILD PLAN SKETCH, PLAN NOT YET BUILT

DewDrive · github.com/BoujeeEnjinia1701/dewdrive

| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| P1 | Making sketch for the prototype build plan | 2026-10-01 | AC |

**TOP VIEW**

Scale 1:5; looking down (along -Z)

**FRONT VIEW**

Scale 1:5; looking at the front (along +Y)

**RIGHT VIEW**

Scale 1:5; looking at the right side (along -X)

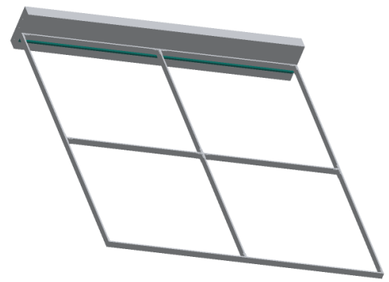

**WHERE IT GOES**

This part in colour, its neighbours in grey

**HOW TO MAKE IT AND HOW IT FITS**

Cut two 910 mm lengths of 15 x 15 x 2 angle; deburr.
Drill four 4.5 mm holes in one leg (the upright leg), 7 from its edge, at 50, 320, 590 and 860 from one end; countersink them.
Fit: on the inside of the east and west walls, centred along them, the other leg pointing into the box. The top of the ledge is 44 above the wall bottom, level with the top of the bottom batten.
Four 4 x 25 countersunk stainless wood screws into the batten.
The tray deck rests on the two ledges (it is not screwed down).
Check: both ledges at the same height within 1 mm.

DEWDRIVE

github.com/BoujeeEnjinia1701/dewdrive

# DewDrive wall ledge (make 2): making sketch

| DRAWING NO. | REV | SHEET | SIZE |
|---|---|---|---|
| DWD-DWG-106 | P1 | 1 of 1 | ANSI B |

| SCALE | UNITS | PROJECTION | DATE | DRAWN |
|---|---|---|---|---|
| 1:5 | mm | | 2026-10-01 | Amish Chadha |

MATERIAL / NOTES

Aluminium equal angle 15 x 15 x 2 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand