BUILD PLAN SKETCH, PLAN NOT YET BUILT

DewDrive · github.com/BoujeeEnjinia1701/dewdrive

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

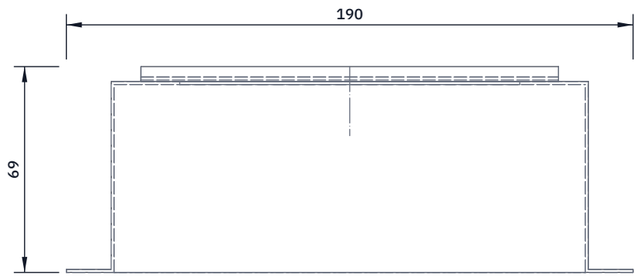

TOP VIEW

Scale 1:2; looking down (along -Z)

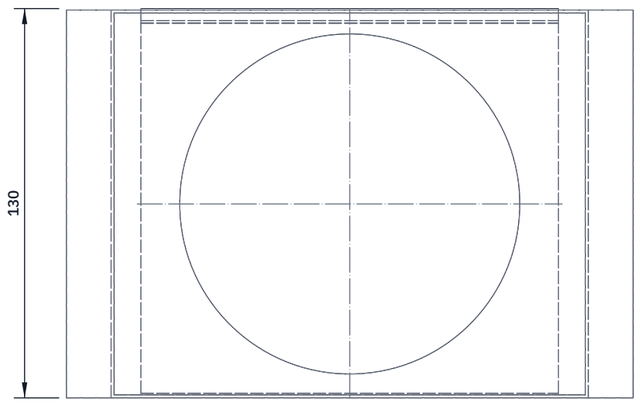

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

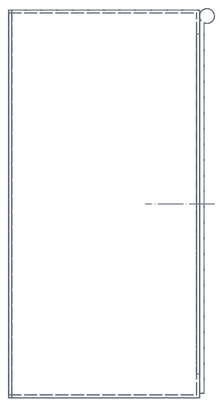

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

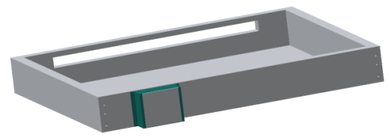

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Hood 160 wide, 64 deep, 130 tall, folded from one 1 mm blank: front, top, bottom and two sides; a 15 mm flange folded out at the back edge of each side; corners riveted and sealed.

Cut a 114 mm round hole in the front, centred, for the fan.

The 120 mm fan screws to the inside of the front with four M4 screws, blowing out (north).

Fit: over the 140 x 44 outlet slot in the north wall, the hood's bottom level with the wall bottom; four screws through each flange, bedded in silicone.

Outlet flap 140 x 125 x 1.5 mm with EPDM seal, hinged at its top edge on the hood front. By day it hangs shut on the fan opening; at night a wire stay holds it open.

Check: the fan turns freely with the flap open.

DEWDRIVE

github.com/BoujeeEnjinia1701/dewdrive

DewDrive fan hood and outlet flap: making sketch

DRAWING NO.	REV	SHEET	SIZE
DWD-DWG-113	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

Aluminium sheet 1 mm (hood); 1.5 mm (flap)

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand