BUILD PLAN SKETCH, PLAN NOT YET BUILT

DewDrive · github.com/BoujeeEnjinia1701/dewdrive

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

TOP VIEW

Scale 1:10; looking down (along -Z)

FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

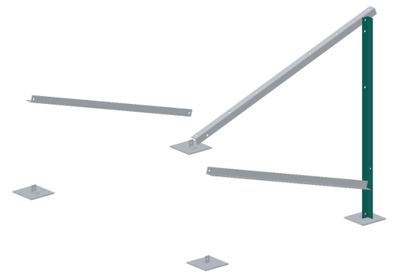

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two 859 mm lengths of 30 x 30 x 3 angle; ends square.
The face leg bolts to the rail and the brace; the outward leg points north, away from the box, and carries the cross member.
Face leg, 9 mm holes on its centre line: rail bolt 12 below the top; foot cleat bolt 17 above the bottom.
Outward leg: cross member bolt 212 above the bottom, 17 from the corner.
North legs carry the side brace's low end, 145 above the bottom.
North-east leg: two 9 mm holes for the PV pole, 559 and 799 above the bottom, in the face leg. North-west leg: two 9 mm holes for the backing plate, in the outward leg, 15 from the corner.
Left and right legs are mirror images: drill as a pair.
Check: the top sits 3 mm below the rail's top face once bolted.

DEWDRIVE

github.com/BoujeeEnjinia1701/dewdrive

DewDrive north legs (make 2, a left and a right): making sketch

DRAWING NO.	REV	SHEET	SIZE
DWD-DWG-116	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

Galvanized steel angle 30 x 30 x 3 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand