BUILD PLAN SKETCH, PLAN NOT YET BUILT

DewDrive · github.com/BoujeeEnjinia1701/dewdrive

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

TOP VIEW

Scale 1:10; looking down (along -Z)

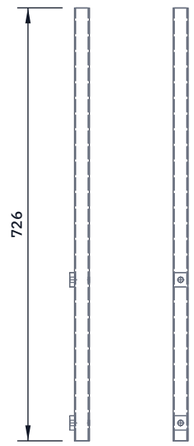

FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

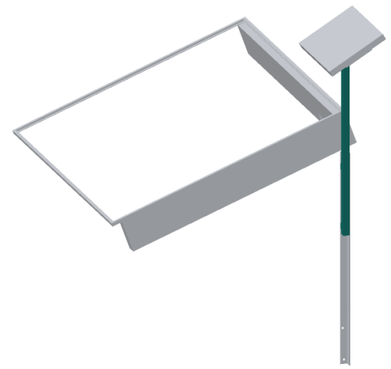

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 726 mm of 25 x 25 x 2 square tube; cap the top with the bought pole-top tilt bracket's sleeve.

Drill 9 mm right through, on the centre line, 30 and 270 from the bottom.

Spacers: two 24 x 24 mm blocks of 8 mm steel, drilled 9 mm.

Fit: on the outer face of the north-east leg's face leg, with a spacer at each bolt so the pole stands 6 mm clear of the box wall; two M8 x 50 bolts through leg, spacer and pole.

The panel bracket sits on top and tilts the panel 30 degrees, facing south.

Check: the pole is plumb within 1 degree.

DEWDRIVE

github.com/BoujeeEnjinia1701/dewdrive

DewDrive PV pole: making sketch

DRAWING NO.	REV	SHEET	SIZE
DWD-DWG-121	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

Steel square tube 25 x 25 x 2 mm, galvanized; two spacer blocks

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand