BUILD PLAN SKETCH, PLAN NOT YET BUILT

DockHub · github.com/BoujeeEnjinia1701/dockhub

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:20; looking down (along -Z)

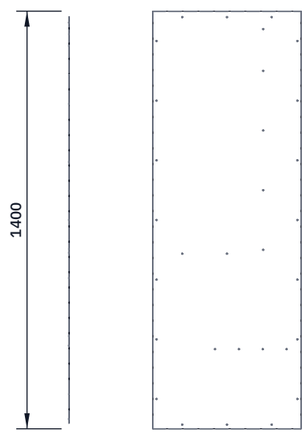

FRONT VIEW

Scale 1:20; looking at the front (along +Y)

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two, flat, 497 x 1,400 mm; deburr and break the edges.
No holes are drilled before assembly: drill 4.1 mm rivet holes
through the panel into each flange behind it as you fit it.
Rivet lines, 12 mm in from the edges, 100 mm pitch (heights from the ground):
front and back edges, into the front and back panel flanges;
bottom edge, into the floor pan flange;
top edge, into the roof flange;
and across the panel at 674 to 699 mm (bay deck flange),
354 to 379 mm (charger shelf flange) and the plenum wall
flange, 112 to 132 mm behind the centre line.
Fit: stands on the floor pan's side flange, outside every flange.
Check: the two panels are the same, square within 2 mm.

DOCKHUB

github.com/BoujeeEnjinia1701/dockhub

DockHub side panel (make 2): making sketch

DRAWING NO.	REV	SHEET	SIZE
DKH-DWG-104	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:20	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

Galvanized steel sheet 1.5 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand