REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

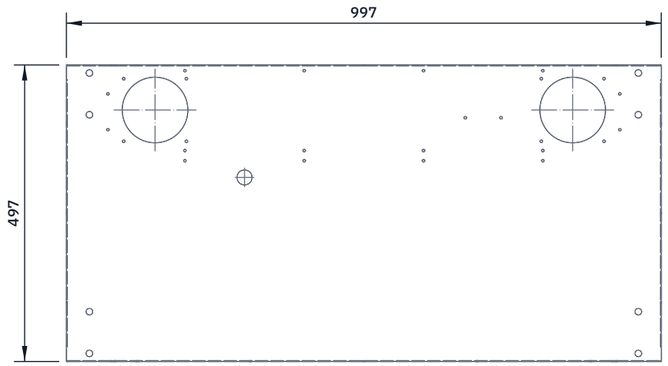

TOP VIEW

Scale 1:10; looking down (along -Z)

FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

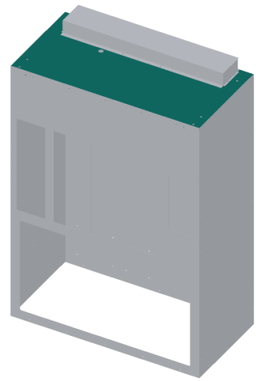

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Plate 997 x 497 mm with 40 mm flanges folded down on all four edges; the side flanges stop 25 mm short of each corner.
Holes, sideways from the centre line and back from the centre:
two 110 mm fan holes at 350 each side, 173 back;
eight 11 mm post bolt holes at 460 each side, 165 and 235 front and back of the centre;
one 25 mm gland hole for the panel cable at 200 left, 60 back.
Front and back flanges: two 9 mm cleat bolt holes at 410 and 430 each side, 18 mm up from the flange's lower edge.
Fit: drops in from above inside the four walls; flanges riveted to the walls, sealed with mastic; the plate's top is flush with the wall tops. The beams, fans and detector are fitted first.
Check: drops in without forcing; all post holes over the beams.

DOCKHUB github.com/BoujeeEnjinia1701/dockhub

DockHub roof panel: making sketch

DRAWING NO.	REV	SHEET	SIZE
DKH-DWG-112	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES
Galvanized steel sheet 1.5 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com
Generated from cad/src; do not edit by hand