



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

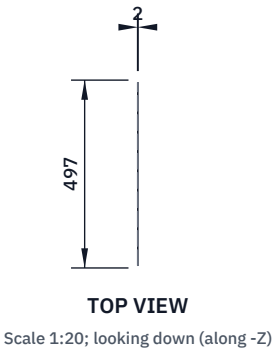

WHERE IT GOES

This part in colour, its neighbours in grey

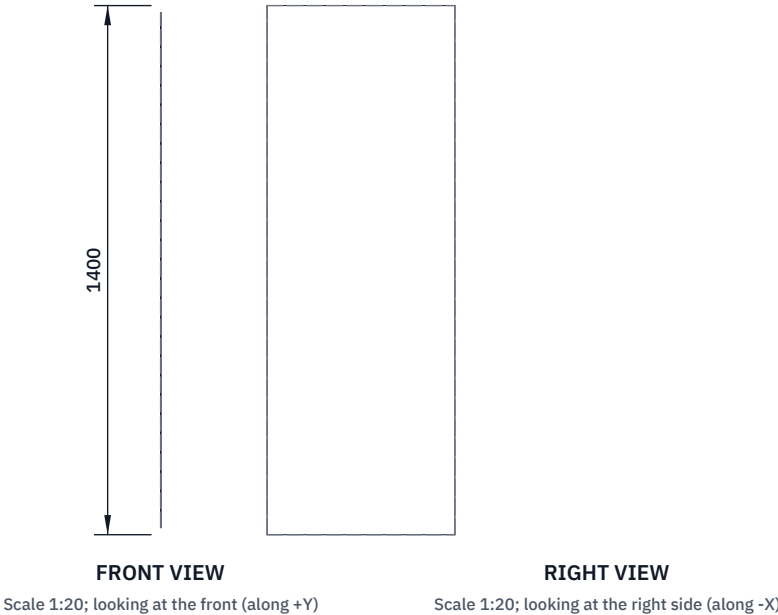

HOW TO MAKE IT AND HOW IT FITS

Make two, flat, 497 x 1,400 mm; deburr and break the edges.

No holes are drilled before assembly: drill 4.1 mm rivet holes through the panel into each flange behind it as you fit it.

Rivet lines, 12 mm in from the edges, 100 mm pitch (heights from the ground):

front and back edges, into the front and back panel flanges;

bottom edge, into the floor pan flange;

top edge, into the roof flange;

and across the panel at 674 to 699 mm (bay deck flange),

354 to 379 mm (charger shelf flange) and the plenum wall

flange, 112 to 132 mm behind the centre line.

Fit: stands on the floor pan's side flange, outside every flange.

Check: the two panels are the same, square within 2 mm.

DOCKHUB				github.com/BoujeeEnjinia1701/dockhub			
DockHub side panel (make 2): making sketch							
DRAWING NO. DKH-DWG-104			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES Galvanized steel sheet 1.5 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	