


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

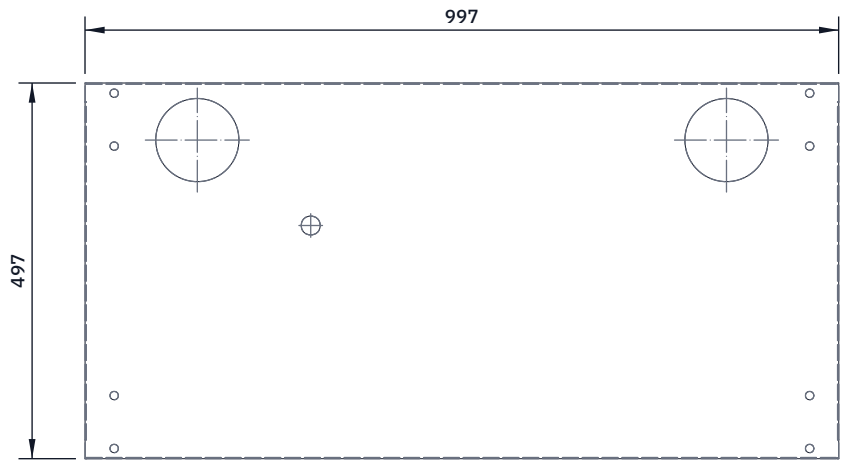


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

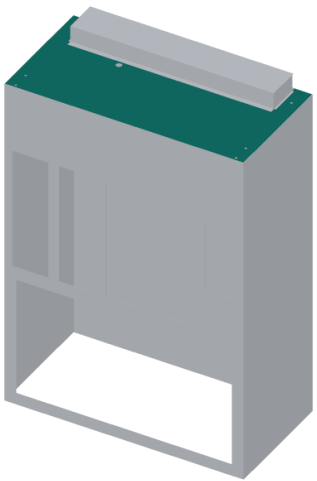

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Plate 997 x 497 mm with 40 mm flanges folded down on all four edges; the side flanges stop 25 mm short of each corner.

Holes, sideways from the centre line and back from the centre:

- two 110 mm fan holes at 350 each side, 173 back;
- eight 11 mm post bolt holes at 460 each side, 165 and 235 front and back of the centre;
- one 25 mm gland hole for the panel cable at 200 left, 60 back.

Front and back flanges: two 9 mm cleat bolt holes at 410 and 430 each side, 18 mm up from the flange's lower edge.

Fit: drops in from above inside the four walls; flanges riveted to the walls, sealed with mastic; the plate's top is flush with the wall tops. The beams, fans and detector are fitted first.

Check: drops in without forcing; all post holes over the beams.

DOCKHUB

github.com/BoujeeEnjinia1701/dockhub

DockHub roof panel: making sketch

DRAWING NO. DKH-DWG-112			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Galvanized steel sheet 1.5 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand