

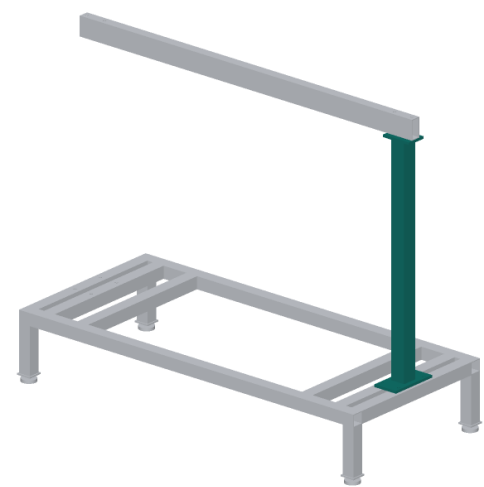


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	Amish's requirement decisions of 2026-10-03 (DMP-DDR-003)	2026-10-03	AC



WHERE IT GOES

This part in colour, its neighbours in grey

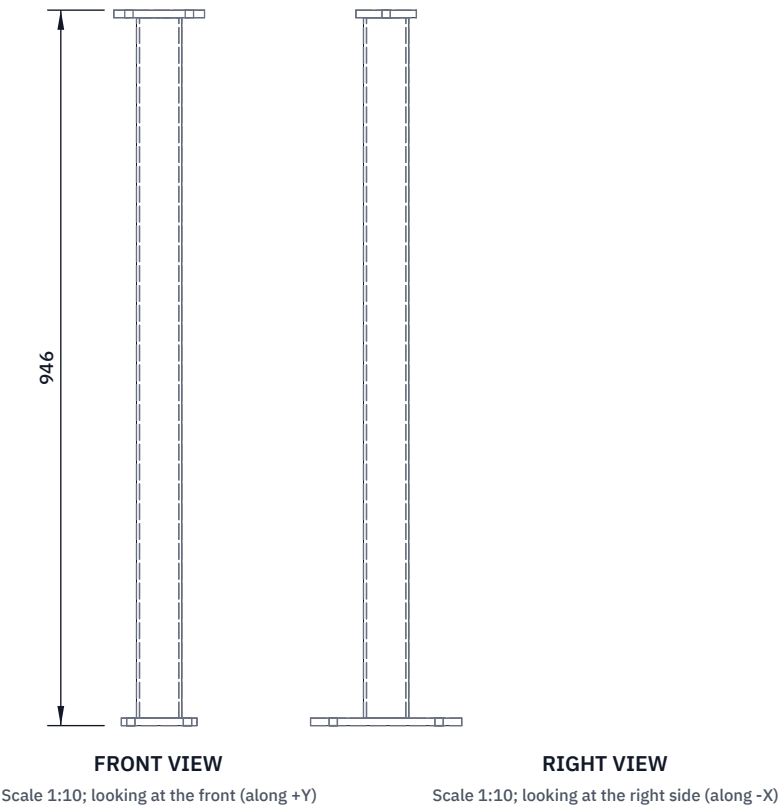

HOW TO MAKE IT AND HOW IT FITS

Make two. Post: 60 x 60 x 4 mm RHS, 926.5 mm long, square ends.

Base plate 200 x 100 x 10 mm: four 11 mm holes on a 75 x 140 mm rectangle (75 mm along the frame, 140 mm across it).

Cap plate 120 x 80 x 10 mm: two 11 mm holes on the centre line, 80 mm apart (40 mm each side of the post).

Weld the post to the middle of both plates, square both ways; check with a square before the welds cool.

Left post only: two 11 mm holes across it, 550 and 700 mm up from the frame top, for the tool shelf's two M10 through-bolts.

Fit: the base bolts across the two end cross members of the frame with 4 x M10 x 80; the rail beam sits on the cap and is held by two M10 through-bolts. Post centre 712.5 mm from the middle.

Check: post upright within 1 mm over its height when bolted.

DRUMPANEL				github.com/BoujeeEnjinia1701/drumpanel			
DrumPanel rail post (make 2): making sketch							
DRAWING NO. DMP-DWG-105			REV P2		SHEET 1 of 1		SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES 60 x 60 x 4 mm RHS; 10 mm plate; S275							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	