




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	Amish's requirement decisions of 2026-10-03 (DMP-DDR-003)	2026-10-03	AC

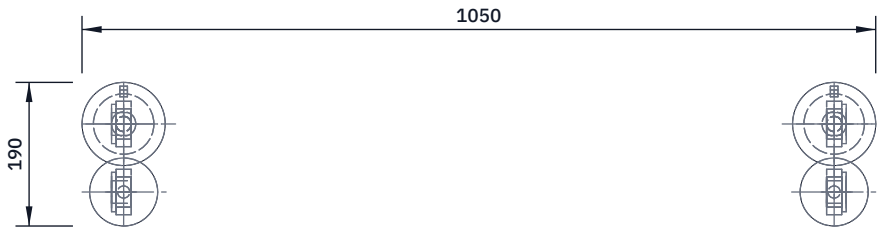


TOP VIEW
Scale 1:10; looking down (along -Z)



FRONT VIEW
Scale 1:10; looking at the front (along +Y)

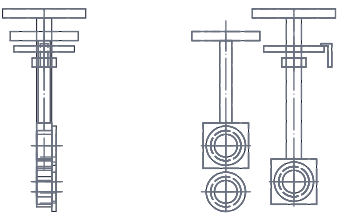

RIGHT VIEW
Scale 1:10; looking at the right side (along -X)

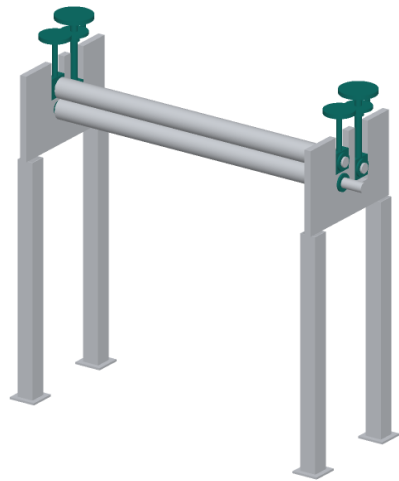

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Four slide blocks, 60 x 60 x 20 mm (20 mm thick = the side plate), bored 40 mm in the middle for a flanged bronze bush.

Fit in the 60 mm slots with 0.2 mm clearance; break the edges.

Six flanged bronze bushes 30 x 40 x 20 mm, 52 mm flange 6 mm thick, pressed in from the outside; a grease hole in each.

A 3 mm keeper plate on the inside face holds each block in.

Pinch screws M16 x 120 (two) with 90 mm handwheels. Bending screws M20 x 1.5 fine pitch, 150 mm (two), with 110 mm handwheels.

Each screw has a collar captured in the top of its block.

Bending roll adjuster on each bending screw: an M20 x 1.5 lock nut on the bridge; an 80 mm dial of 60 divisions (0.025 mm each), clamped to the screw by a set screw; a pointer screwed to the bridge, its tip over the dial rim.

Fit: the screws run in the threaded holes of the top bridges.

Check: each block slides its full travel; one turn of a bending screw moves its roll 1.5 mm; the lock nut holds the setting.

DRUMPANEL			github.com/BoujeeEnjinia1701/drumpanel		
DrumPanel slide blocks, bushes, screws and dials: making sketch					
DRAWING NO. DMP-DWG-116			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 		DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES 20 mm steel plate; bronze bushes; M16 and M20 x 1.5 screws; dials					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		