



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

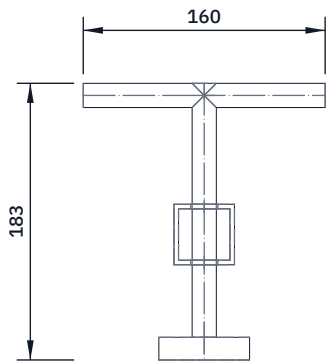


TOP VIEW

Scale 1:5; looking down (along -Z)

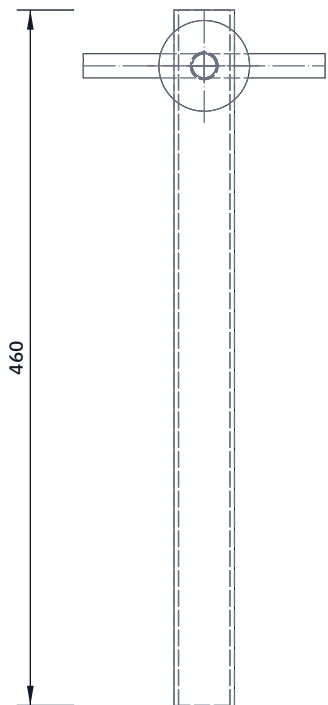


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

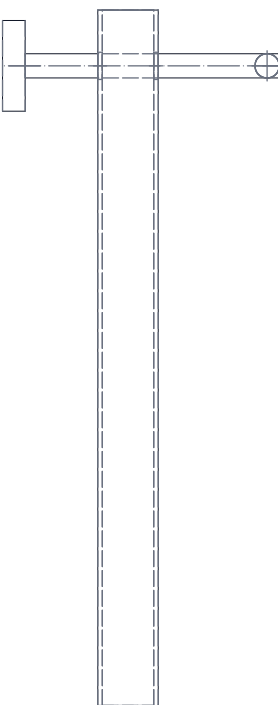

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

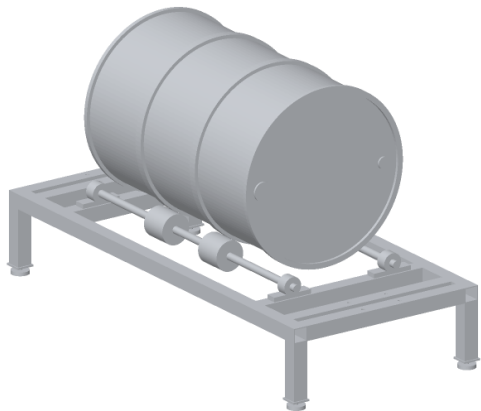

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Post: 40 x 40 x 3 mm RHS, 460 mm long. Two 11 mm holes through it, 25 mm apart, 56 and 81 mm up from its foot, to bolt it to the rail.

An 18 mm hole through both walls 423 mm up from its foot; weld an M16 nut over the hole on the outer face (away from the drum).

Screw: M16 x 200; weld a 16 mm bar 160 mm long across its head as a T-handle. A 60 mm rubber pad 15 mm thick on a swivel plate at its tip faces the drum.

Fit: post bolted with 2 x M10 to the outer face of the right side rail at the middle of the frame. Screwed in, the pad presses on the drum side between the hoops at the height of the drum axis.

Check: with the screw tight the drum cannot be turned by hand.

DRUMPANEL

github.com/BoujeeEnjinia1701/drumpanel

DrumPanel drum brake: making sketch

DRAWING NO. DMP-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 40 x 40 x 3 mm RHS; M16 x 200 screw; 16 mm bar; rubber pad					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand