
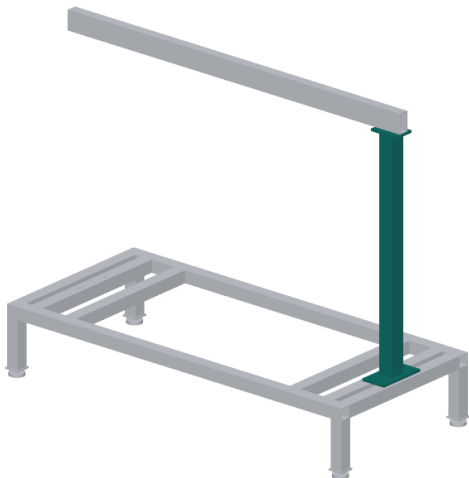
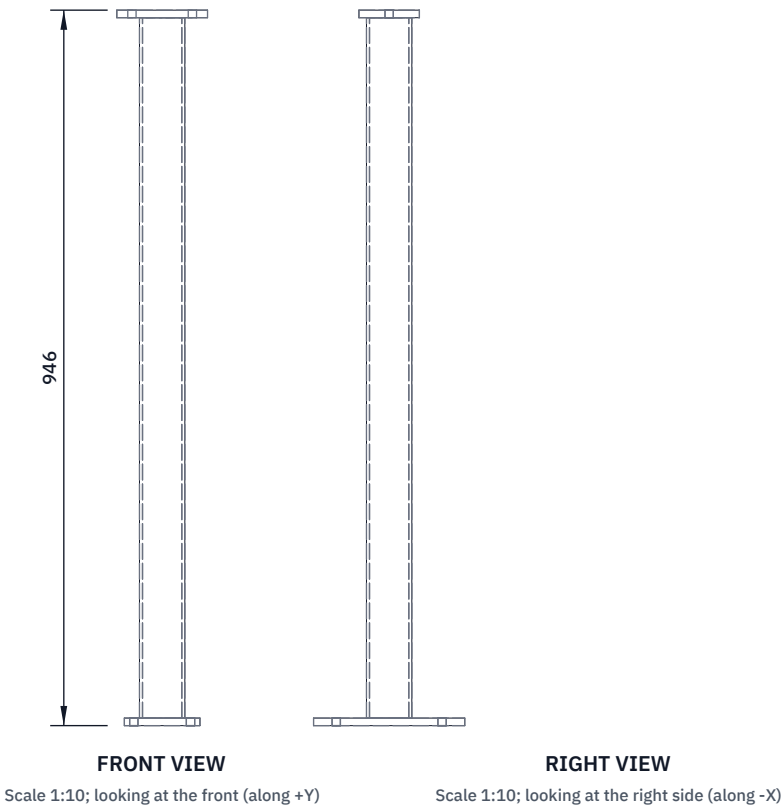


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two. Post: 60 x 60 x 4 mm RHS, 926.5 mm long, square ends.

Base plate 200 x 100 x 10 mm: four 11 mm holes on a 75 x 140 mm rectangle (75 mm along the frame, 140 mm across it).

Cap plate 120 x 80 x 10 mm: two 11 mm holes on the centre line, 80 mm apart (40 mm each side of the post).

Weld the post to the middle of both plates, square both ways; check with a square before the welds cool.

Fit: the base bolts across the two end cross members of the frame with 4 x M10 x 80; the rail beam sits on the cap and is held by two M10 through-bolts. Post centre 712.5 mm from the middle.

Check: post upright within 1 mm over its height when bolted.

DRUMPANEL		github.com/BoujeeEnjinia1701/drumpanel		
DrumPanel rail post (make 2): making sketch				
DRAWING NO. DMP-DWG-105		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES 60 x 60 x 4 mm RHS; 10 mm plate; S275				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	