



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

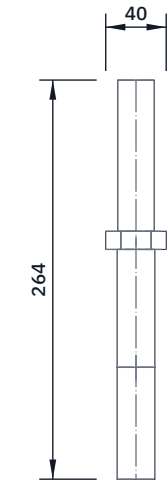


TOP VIEW
Scale 1:5; looking down (along -Z)

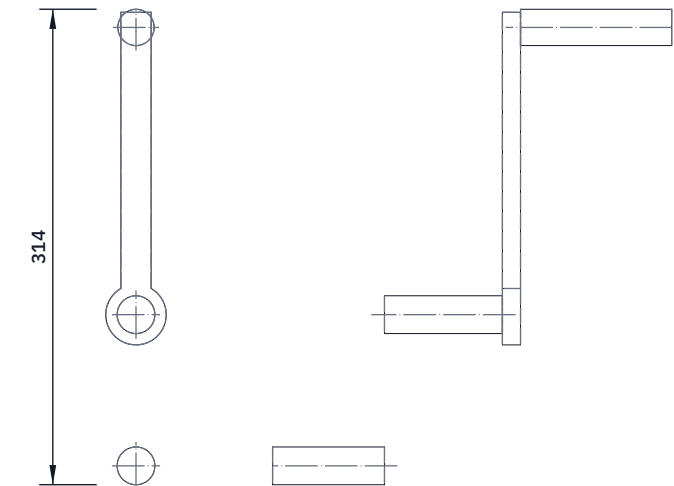

FRONT VIEW
Scale 1:5; looking at the front (along +Y)

RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

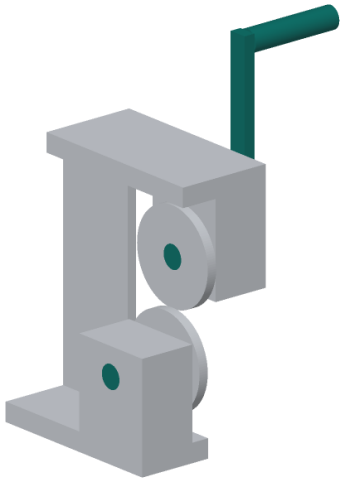

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Upper shaft: 25 mm, 78 mm long, with a 35 mm shoulder 10 mm from the disc end and a 6 mm keyway at the crank end.

Crank: 40 mm boss 12 mm thick, arm 20 x 12 mm, 200 mm between centres; 24 mm grip 100 mm long, free to spin on a 16 mm pin.

Lower shaft: 25 mm, 74 mm long, same shoulder; no crank.

Discs (bought): 101 x 10 mm D2, hardened 58 to 60 HRC, 25 mm bore.

Each is clamped against its shoulder by a countersunk M8 end screw and washer that sit below the cutting face.

Fit: cutting faces meet on the cut plane with no gap and no rub;

shim behind a disc with 0.05 mm shims to get there.

Set the overlap to 1.0 mm with the eccentric and lock it.

Check: turning the crank turns the upper disc; a strip of 1 mm sheet cuts cleanly by hand.

DRUMPANEL

github.com/BoujeeEnjinia1701/drumpanel

DrumPanel head shafts and crank: making sketch

DRAWING NO. DMP-DWG-110			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 25 mm bright bar; 20 x 12 mm flat; 16 mm pin; bought D2 discs					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand