
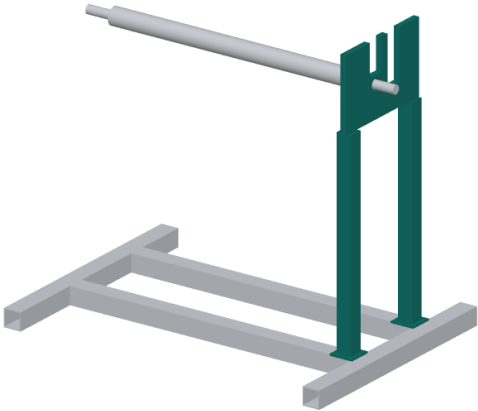


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

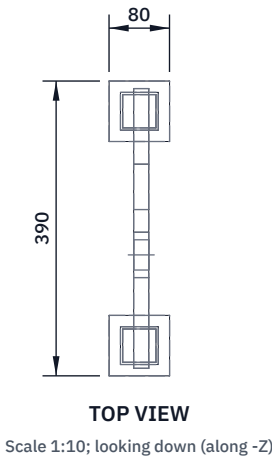

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two (mirror pair). Plate 20 mm, 370 x 250 mm.

Bore 40 mm for the lower roll bush: 110 mm up from the plate's bottom edge, 150 mm from its front edge.


Pinch slot 60 mm wide from 140 mm up to the top, centred over the bore. Bending slot 60 mm wide from 80 mm up to the top, centred 90 mm behind the bore. File both slots smooth and parallel.

Legs: 50 x 50 x 3 RHS 694 mm long under the plate at 30 mm and 340 mm from the front edge, with 80 x 80 x 6 mm foot plates.

Top bridge (bolted, not welded): 25 x 25 mm bar 370 mm long with M16 and M20 threaded holes over the slots; 2 x M10 into the plate.

Fit: plate inner faces 920 mm apart; legs bolted to the base.

Check: both bores line up within 0.5 mm (a 30 mm bar through).

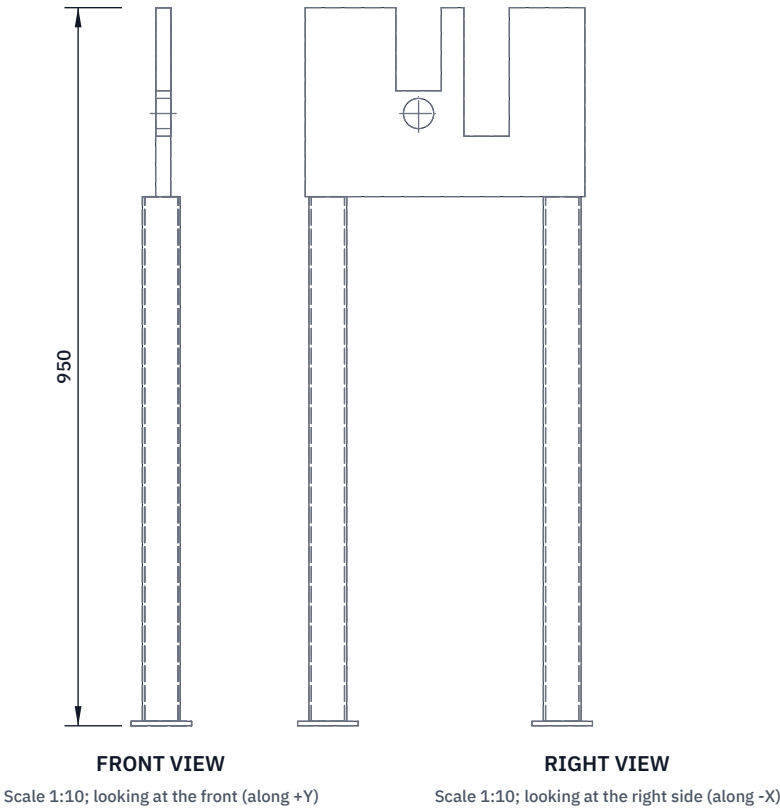

DRUMPANEL			github.com/BoujeeEnjinia1701/drumpanel		
DrumPanel side frame (make 2, mirror pair): making sketch					
DRAWING NO. DMP-DWG-114		REV P1	SHEET 1 of 1		SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 20 mm plate 370 x 250; 50 x 50 x 3 RHS legs; 6 mm foot plates; S275					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					
Generated from cad/src; do not edit by hand					