
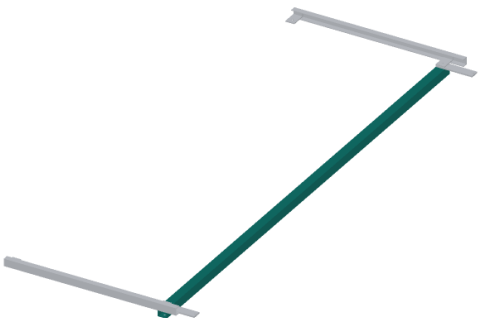


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

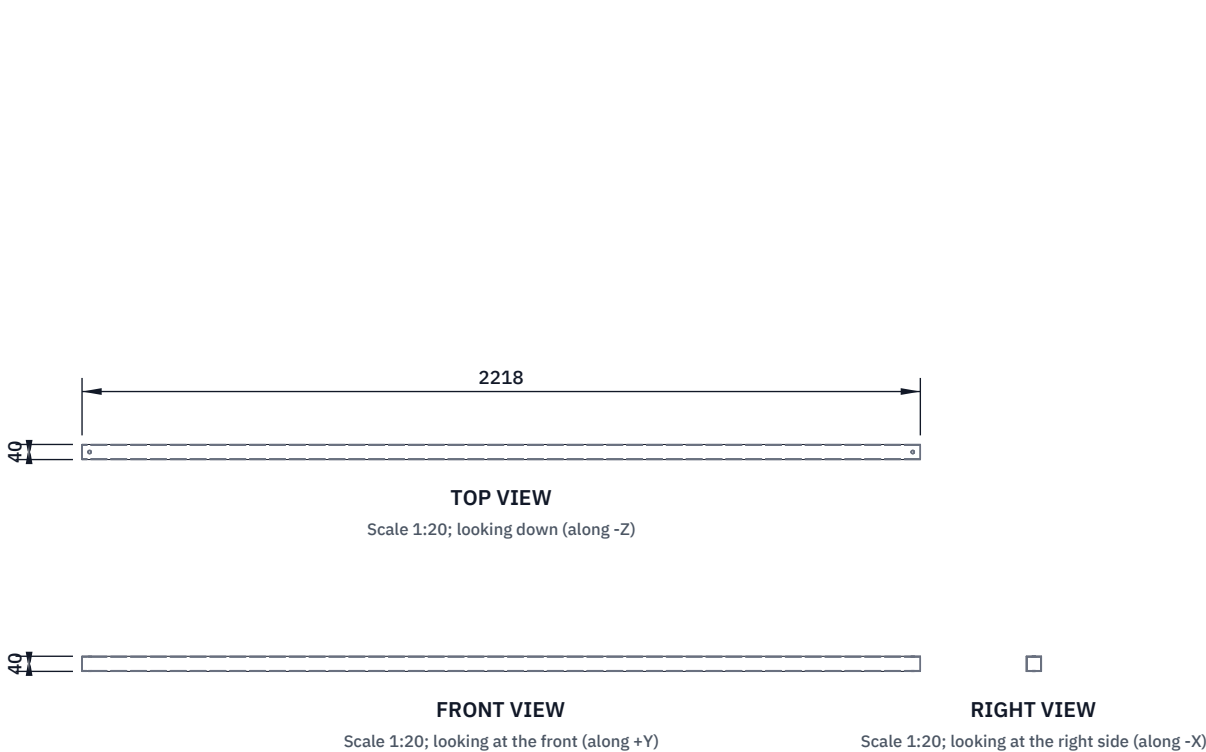

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut three 2,218 mm lengths (module length less 60).
All three: 8.5 mm holes top to bottom on the centre line, 20 from each end (rail bracket and clamp bolts).
Far and rail-start members: two 8.5 mm holes across, 10 below the top and 10 above the bottom, 270 and 1,918 from the lower end (legs).
Far and rail-start members: 6.5 mm holes top to bottom, 100, 600 and 2,138 from the lower end (ties).
Far member: holes for the charger box and the mast U-bolts.
Rail-start member: two 6.5 mm holes across, 30 from the lower end, for the contact post.
Check: the three are the same length within 1 mm.

DUSTRUNNER			github.com/BoujeeEnjinia1701/dustrunner		
DustRunner dock cross member (make 3): making sketch					
DRAWING NO. DRN-DWG-113			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium square tube 40 x 40 x 2 mm, 6063					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	