



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

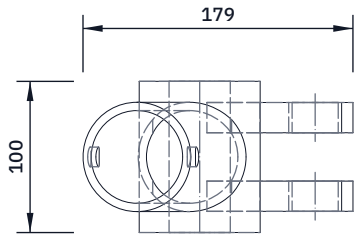


TOP VIEW

Scale 1:5; looking down (along -Z)

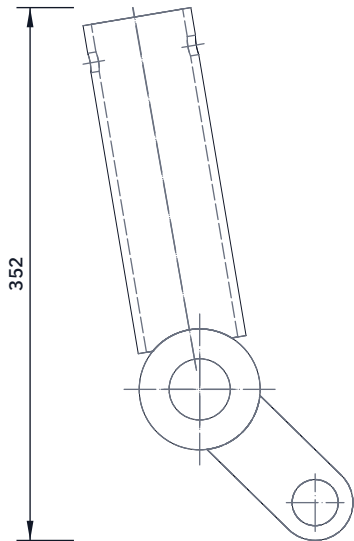


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

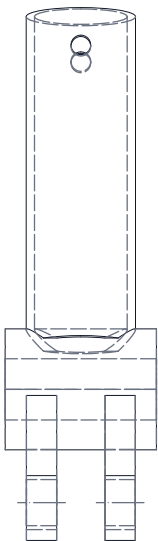

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

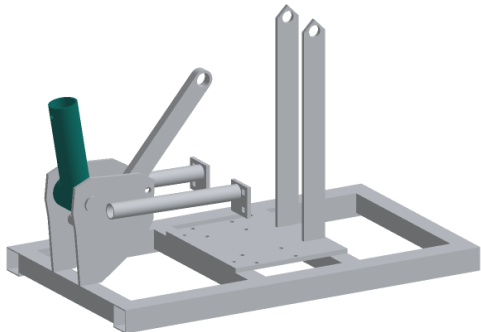

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Hub: 80 round, 100 long, bored 40.5 through (or 80 x 20 tube); press in two 40 mm bushes if wanted.

Crank plates: two 20 mm plates 50 wide, 107 centres, round ends, bored 40.5 (hub) and 30.5 (crank pin); 32 apart inside, welded on the hub. Bore the crank pin holes as a pair.

Socket: 72 x 5 tube (61.3 inside), 220 long, welded on the hub at 144 degrees from the crank plates (see the front view), its inner end 30 from the hub centre.

Locking pin hole 13 across the socket, 225 from the hub centre.

Fit: hub on the 40 shaft between the bracket plates, with a 10 mm washer each side; the shaft has a circlip each end.

Check: turns freely on the shaft; the lever pipe slides in.

EARTHPRESS

github.com/BoujeeEnjinia1701/earthpress

EarthPress lever hub, crank plates and socket: making sketch

DRAWING NO. EPR-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES 80 mm bar or thick tube; plate 20 mm; tube 72 x 5					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	