


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:2; looking down (along -Z)

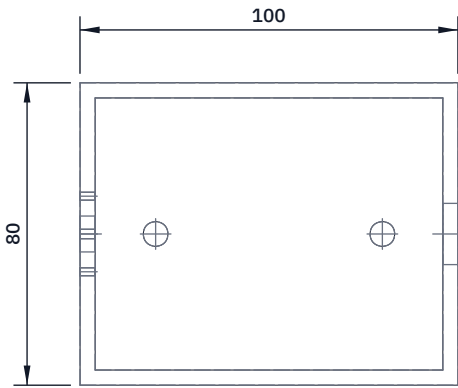


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

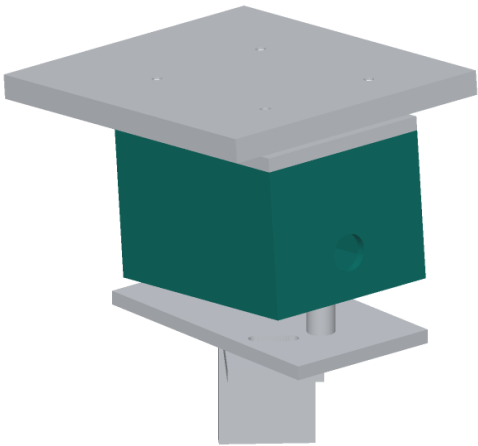

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bought box with its lid; drill the body only. West wall is the short end that faces along the gutter; heights from the floor.

West wall: one 9.5 mm window, centred, 35 mm up; four holes tapped M2.5 at 10 mm each side and 10 mm above and below the window, for the sensor board; two holes tapped M3, 15 mm above and 15 mm below the window, for the lens hood.

East wall: one 16.2 mm hole, centred, 20 mm up, for the M16 gland.

Floor: two 6.5 mm holes on the centre line, 30 mm each side of the middle, for the M6 bolts down to the pod plate.

Lid: four holes tapped M4 at 35 mm each side and 28 mm in front and behind the middle, for the hood spacers.

Clamp the box in soft jaws; centre punch lightly; deburr inside.

Check: the sensor's 9.2 mm can passes the window without touching.

EMBERGUARD

github.com/BoujeeEnjinia1701/emberguard

EmberGuard pod box (make 2): drilling sketch

DRAWING NO. EGD-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Bought die-cast aluminium box about 100 x 80 x 70 mm, 4 mm walls					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand